
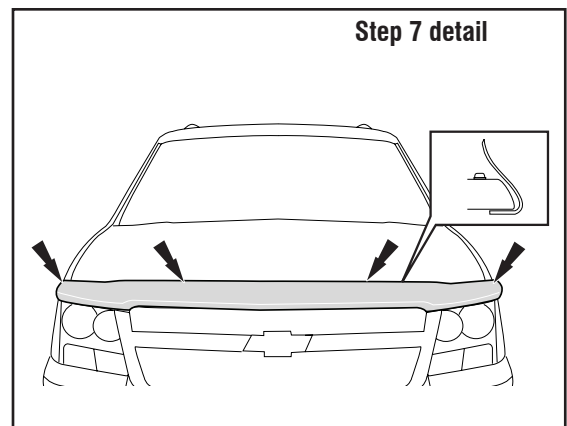
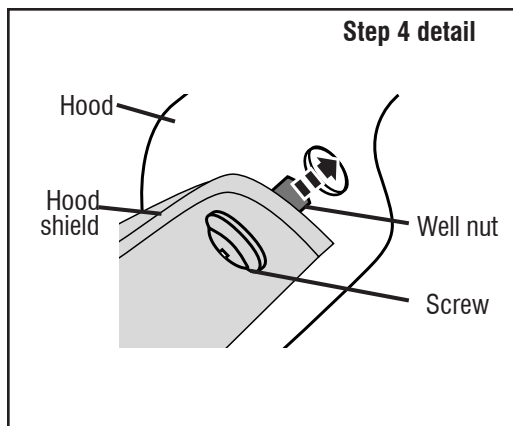


1. Open Hood. Locate (5) circular holes on the underside of hood. Clean the area around these with a soft cloth.
2. Attach fasteners to hoodshield by inserting screw through hood shield, and into well nut. **Partially** thread screw into well nut.
3. Center part on front edge of hood and align holes.
4. NOTE: Observe the alignment from the side view in order to guide the hood shield with its attached fastener into the proper hole in the hood. (See detail below.)
5. With the fastener assembly inserted into hole in hood, secure hood shield to hood by tightening screw to expand well nut. Repeat for remaining fasteners.
6. Close Hood.
7. Apply bump ons to surface of hood. (See detail below.)

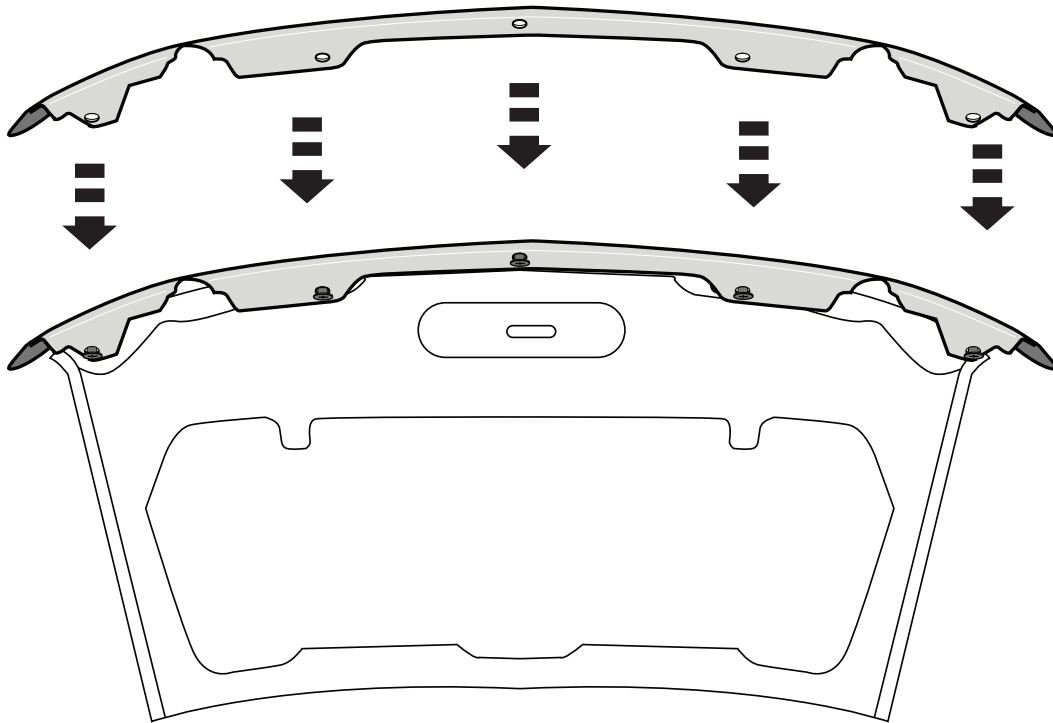

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.