


PARTS LIST:

1	Driver/Left Sidebar	4	1/2"-13 x 2" Hex Bolts
1	Passenger/Right Sidebar	10	1/2" x 1 3/8" OD x 3/32" Flat Washers
2	Front Mounting Brackets	10	1/2" Lock Washers
2	Center Mounting Brackets	2	8-1.25mm x 25mm Hex Bolts
1	Driver/Left Rear Mounting Bracket	2	8mm x 16mm OD x 1.6mm Flat Washers
1	Passenger/Right Rear Mounting Bracket	2	8mm Lock Washers
6	12-1.75mm x 120mm Hex Bolts		

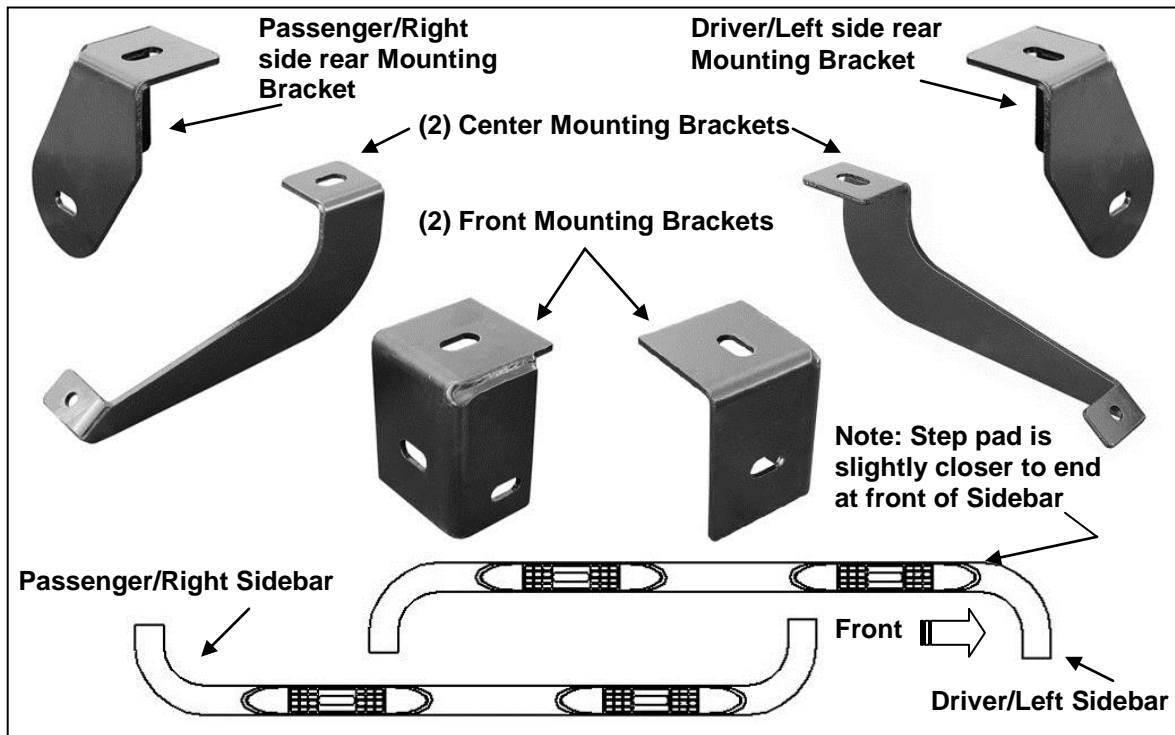

PROCEDURE:

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- Remove the passenger front body mount bolt. Select (1) the front Mounting Bracket bolt it into position against the body mount with the included 12mm x 120mm Hex Bolt, 1/2" Lock Washer and factory flat washer or the supplied 1/2" Flat Washer. Snug but do not tighten hardware at this time.
- Repeat **Step 2** to install the Rear Mounting Bracket. Snug but do not tighten hardware at this time.
- Next, install the Center Mounting Bracket as previously described but leave the hardware loose at this time.
- Carefully unwrap the passenger Sidebar and gently place it up to the front and rear Mounting Brackets. Align the holes on the front and rear Mounting Brackets with holes on the Sidebar. Secure Sidebar to Mounting Brackets using (2) 1/2" x 2" Hex Bolts, (2) 1/2" Lock Washers and (2) 1/2" Flat Washers. Do not tighten at this time.
- Move the Center Bracket up to the threaded hole in the Sidebar and attach it using (1) 8mm x 25mm Hex Bolt, (1) 8mm Lock Washer and (1) 8mm Flat Washer. Level and align the Sidebar and tighten all hardware at this time.
- Repeat steps 2 - 6 for driver Sidebar installation.
- Do periodic inspections to the installation to make sure all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Sidebar.

For gloss black finishes: Mild soap may be used to clean the Sidebar.

Passenger Side Installation Pictured

