

INSTALLATION INSTRUCTION

Side Bar

98-03 Dodge Durango

QTY	DESCRIPTION
1	Side Bar, left side
1	Side Bar, right side
1	Hardware Kit

NOTE: Please read this information before installing. Check components received with components listed above. **NO DRILLING IS REQUIRED** for installation of these side bars. To obtain correct installation, we recommend you to follow these step by step installation instructions carefully.

Step One: Locate hardware kit. Check contents with the hardware listed below.

QTY	DESCRIPTION
2	Front Mounting Bracket
1	Rear Mounting Bracket-left
1	Rear Mounting Bracket-right
4	12mm x 50mm Hex Bolt-zinc plated
4	12mm Lock washer-zinc plated
4	12mm Flat washer-zinc plated

Step Two: Remove the front and rear body mount bolts.

Step Three: Locate the two short mounting brackets and loosely install them to the front body mount locations with the factory bolts as per the Fig. 1

Step Four: Orient the rear mounting brackets as per Fig. 2 for the rear body mounts and attach with the factory bolts.

Step Five: Place the side bars into position. Using the 12mm x 50mm bolts, 3" plastic rings, and 12mm lock and flatwashers, loosely attach the side bars to the brackets. (NOTE: To determine which side bar is the left or right, Check the number on the welded insert at the end of the tube.)

Step Six: After checking to make sure the side bars are level and parallel with the sides of the vehicle completely tighten all hardware.

Step Seven: Periodically check and retighten the hardware as necessary.

IMPORTANT: Side bars have a 300 lb. weight capacity. To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish.

Cleaning Instructions

Hi-Gloss Black Powder Coat finish: Mild soap, window or glass cleaner may be used. Do not use any type of polish or wax that contains abrasives that could damage the finish.

Stainless Steel finish: Mild soap, window or glass cleaner may be used. Aluminum polish may be used to polish small scratches and scuffs on the finish.



FIG. 1

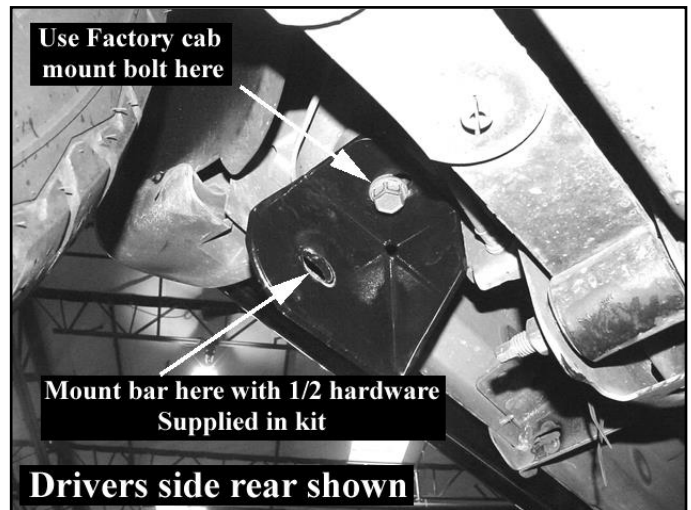


FIG. 2