



STREET SCENE EQUIPMENT, INC.

950-77340 SATIN FINISH
&
950-78340 CHROME FINISH
2004
FX 35
[MAIN GRILLE](#)

INSTALLATION INSTRUCTIONS


VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation.

PARTS LIST					
1	Speed Grille Insert	1	Instruction Sheet	14	Installation Clips # 71099
1	Care For Grilles	1	Street Scene Emblem		

TOOL LIST	
Screwdriver	

1. Open hood.
2. Remove the four fasteners across the top of the grille shell. There are four retaining fasteners located on the grille. Refer to photo for locations. Insert a screwdriver through the grille and rotate 1/4 turn while pulling to release. Do this on all locations.
3. Remove the chrome logo from center of grille. Mask off the chrome perimeter of the grille shell and paint the center black.
4. Install Speed Grille into grille shell by first inserting the top and then sliding in the bottom. Make sure the sides tuck into the groove between the chrome perimeter and the horizontal bars.
5. " Clip " the Speed Grille to the grille shell following the clipping procedure illustration. Place clips at the locations arrowed in the photo.
6. Install grille back into vehicle.

ILLUSTRATION

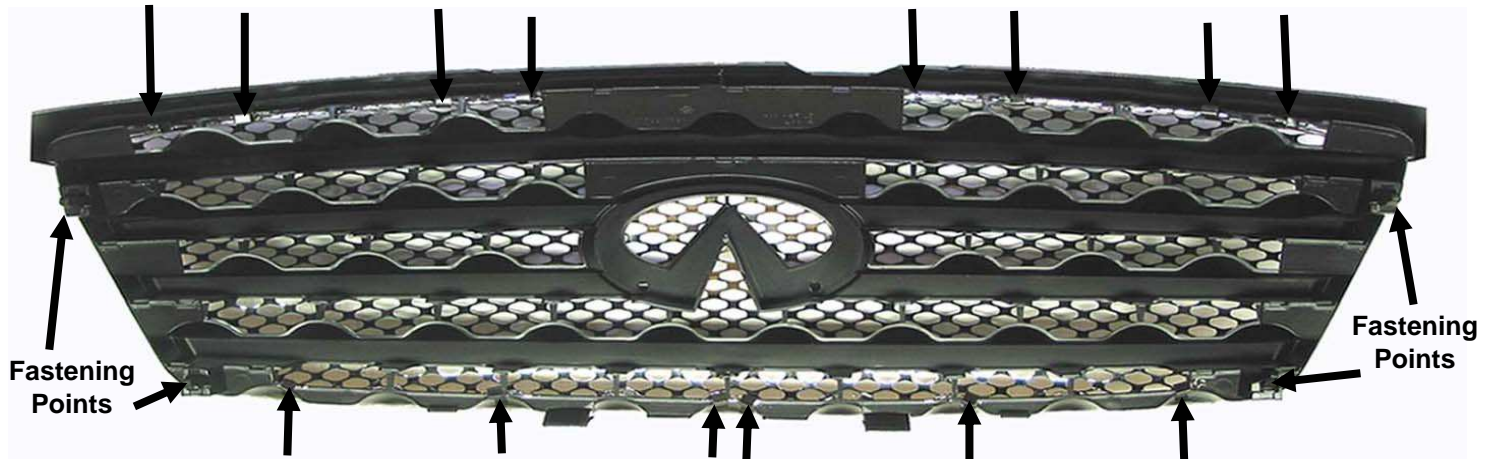

TYPICAL CLIP INSTALLATION

