



STREET SCENE EQUIPMENT, INC.

950-77352 SATIN FINISH
950-78352 CHROME FINISH
2007
NISSAN SENTRA
SPEED GRILLE INSERT

INSTALLATION INSTRUCTIONS

VERY IMPORTANT ! Read and understand all directions and check the following parts list before starting installation.

NOTE:


This is an overlay grille. For a more custom look you may cut out the grids. If you do be sure not to remove the two upper mounting tabs.

PARTS LIST					
1	Speed Grille Insert	1	Instruction Sheet	6	Installation Clips # 71099
1	Care For Grilles	1	Street Scene Emblem	4	Installation Clips # 71096
				12"	Two Inch Wide Two Sided Tape

TOOL LIST	
Phillips Head Screwdriver, Exacto Knife	

1. Open hood.
2. Remove the four fasteners across the top of grille shell by unscrewing the center bolt and then prying out the body.
3. Pull the grille shell forward and reach in and unsnap the retainers on the grille shell holding it to the fascia by depressing the small tab in center.
4. Gently pull the bottom to unsnap the bottom of grille shell from fascia.
5. Remove the "NISSAN " logo by depressing the tabs on the back side. The " NISSAN " logo may be re-attached to the Speed Grille. See Step Nine.
6. Set the grille shell on a bench and place the Speed Grille insert directly on top. Flip grille over.
7. Look at the photo below and install the clips as shown.

PHOTO 1

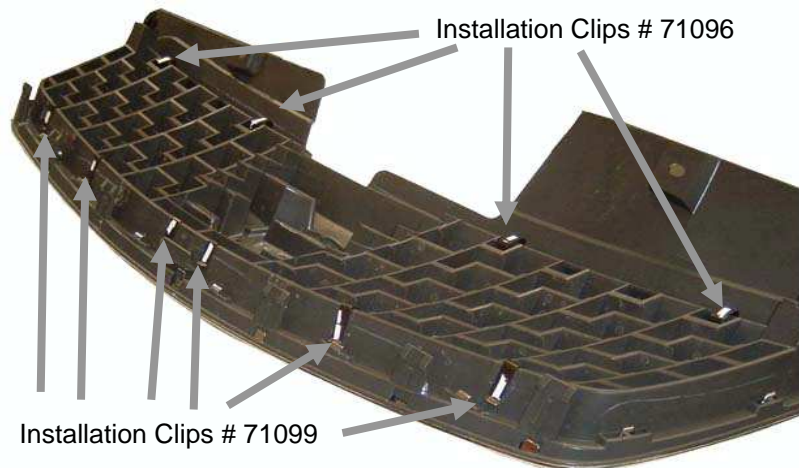

8. Clip the bottom side using the 71099 clips (1" Long Flat Clips). Clip the top side using the 71096 clips (Wide Humped Clips) the photo above shows the placement of the clips.
9. If you would like to re-install the " NISSAN " logo, do as follows. Break the mounting tabs off the back side (bend with pliers to snap off) Grind or sand tabs removed flush with the backside. Apply the two sided tape to the backside of logo. Trim off excess. Install logo on the top of Speed Grille directly over the logo silhouette.
10. Install grille shell back on vehicle by aligning the bottom with the slots in the fascia and then snapping in. Install the top fasteners.