

HTR A/S P02

High-Performance All-Season

HTR A/S P02

Velocity, versatility and value re-imagined...and redefined

Introducing the HTR A/S P02 – Sumitomo’s groundbreaking all-season, high-performance line.

This tire delivers it all - the intensity of exceptionally crisp, high-speed handling and responsiveness, the stability of superior all-season traction, the durability of extended mileage and treadwear and the security of an outstanding warranty package.

Featuring advanced Sumitomo manufacturing technologies and precision engineering, the HTR A/S P02 is a premium choice for sport cars, sedans and crossovers.



Cutting-Edge Technology & Design

- 1 OPTIMIZED ASYMMETRIC TREAD DESIGN**
Enhances wet and dry handling, while reducing irregular wear and road noise
- 2 WIDE WATER EVACUATION CHANNELS**
Reduces hydroplaning risk and bolsters wet-weather performance
- 3 SERRATED SHOULDER SIPING**
Increases gripping edges for more confident braking on slippery surfaces
- 4 NOTCHED GROOVE WALL**
Eliminates wet weather groove wander and improves grip in slush conditions
- 5 WIDE-ANGLED CENTER RIB TREAD SLOTS**
Packs snow for added grip and quickly guides water away from the footprint
- 6 LOCKING MULTI-WAVE SIPE TECHNOLOGY**
Improves all-weather handling, braking and worn appearance



Innovative Engineering for High-Performance Sedans, Sports Cars & CUV's


3D sipes provide more contact with road surface for improved bite versus standard sipes

Silica-enhanced tread compound provides superior wet traction & extended wear performance

Full-width nylon band for increased high-speed stability

Reinforced steel belts for enhanced durability

Solid, high-tension bead apex strengthens sidewall for exceptional cornering stiffness

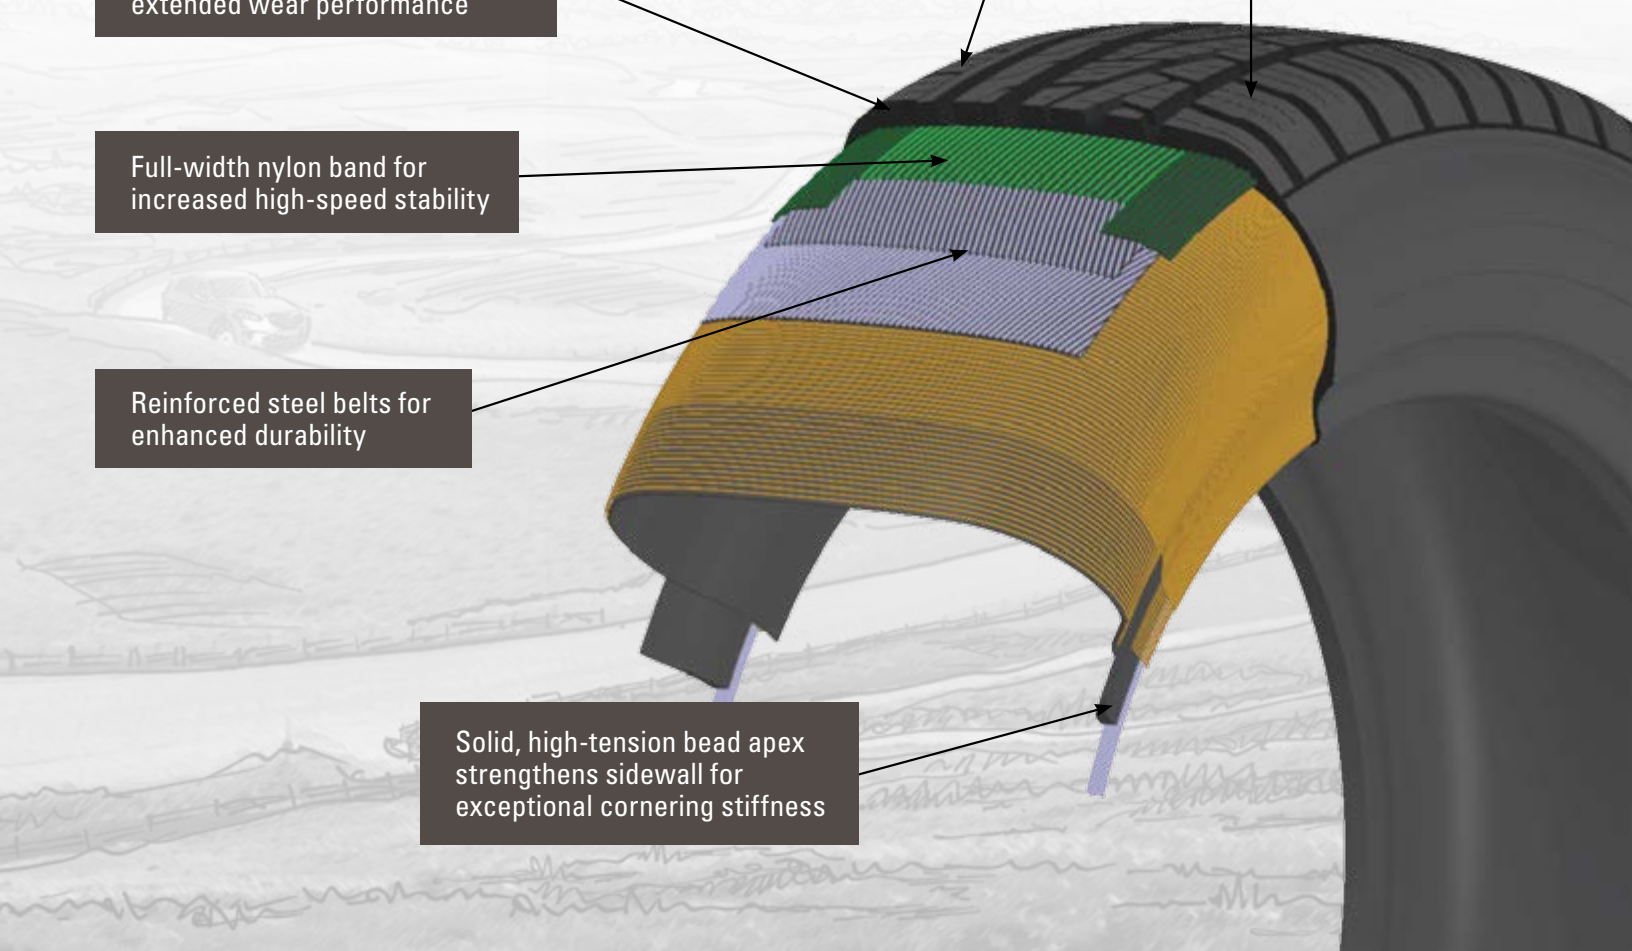

HTR A/S P02

High-Performance All-Season

HTR A/S P02				UTQG - 600 A A, (HR/VR) 500 A A (WR)										
Product Code	Tire Size	Service Description	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Diameter (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
				Min. (in)	Max. (in)	Air (lbs psi)	Load (lbs)							
SRH10	175/65R15	84H	5.0	5.0	6.0	51	1102	24.0	7.0	5.6	10.9	880	10	17.9
SRH27	185/65R15	88H	5.5	5.0	6.5	51	1235	24.4	7.4	5.9	11.1	865	10	18.7
SRH28	195/65R15	91H	6.0	5.5	7.0	51	1356	25.0	7.9	6.2	11.3	848	10	19.4
SRV30	205/65R15/XL	99V	6.0	5.5	7.5	50	1709	25.5	8.2	6.5	11.5	832	10	22.5
SRH65	215/65R15	96H	6.5	6.0	7.5	51	1565	26.0	8.7	6.9	11.7	816	10	22.7
SRH41	195/60R15	88H	6.0	5.5	7.0	51	1235	24.2	7.9	6.4	11.0	874	10	19.2
SRH43	205/60R15	91H	6.0	5.5	7.5	51	1356	24.7	8.2	6.7	11.2	856	10	19.8
SRH22	215/60R15	94H	6.5	6.0	7.5	51	1477	25.2	8.7	7.0	11.4	842	10	21.6
SRV54	205/65R16	95V	6.0	5.5	7.5	51	1521	26.5	8.2	6.5	12.0	800	10	22.9
SRH55	215/65R16	98H	6.5	6.0	7.5	51	1653	27.0	8.7	6.9	12.2	786	10	23.8
SRV18	205/60R16	92V	6.0	5.5	7.5	51	1389	25.7	8.2	6.7	11.7	823	10	22.0
SRH48	215/60R16	95H	6.5	6.0	7.5	51	1521	26.1	8.7	7.0	11.9	811	11	24.6
SRV48	215/60R16/XL	99V	6.5	6.0	7.5	50	1709	26.1	8.7	7.0	11.9	811	11	25.0
SRV52	225/60R16	98V	6.5	6.0	8.0	51	1653	26.6	9.0	7.3	12.0	795	10	27.6
SRW56	235/60R16	100W	7.0	6.5	8.5	51	1764	27.1	9.4	7.7	12.2	783	10	27.7
SRH15	185/55R16	83H	6.0	5.0	6.5	51	1074	24.0	7.6	6.4	11.1	874	10	19.4
SRV81	195/55R16	87V	6.0	5.5	7.0	51	1201	24.4	7.9	6.7	11.2	862	10	20.4
SRW42	205/55R16/XL	94W	6.5	5.5	7.5	50	1477	24.9	8.4	7.1	11.4	845	10	23.1
SRV57	215/55R16/XL	97V	7.0	6.0	7.5	50	1609	25.3	8.9	7.4	11.5	834	10	25.1
SRV98	195/50R16	84V	6.0	5.5	7.0	51	1102	23.7	7.9	7.0	10.9	886	10	19.4
SRV67	205/50R16	87V	6.5	5.5	7.5	51	1201	24.1	8.4	7.3	11.1	874	10	21.1
SRV70	225/50R16/XL	96V	7.0	6.0	8.0	50	1565	24.9	9.2	8.0	11.4	845	10	24.4
SRH76	225/65R17	102H	6.5	6.0	8.0	51	1874	28.5	9.0	7.2	12.9	742	10	27.8
SRV77	235/65R17/XL	108V	7.0	6.5	8.5	50	2205	29.1	9.4	7.5	13.1	732	10	32.5
SRW71	215/55R17	94W	7.0	6.0	7.5	51	1477	26.3	8.9	7.4	12.0	800	10	22.8
SRW88	225/55R17/XL	101W	7.0	6.0	8.0	50	1819	26.8	9.2	7.8	12.2	788	10	25.1
SRW89	235/55R17	99W	7.5	6.5	8.5	51	1709	27.2	9.6	8.1	12.4	778	10	28.7
SRW90	205/50R17/XL	93W	6.5	5.5	7.5	50	1433	25.1	8.4	7.3	11.6	837	10	23.1
SRW58	215/50R17	91W	7.0	6.0	7.5	51	1356	25.5	8.9	7.7	11.7	823	10	26.9
SRW66	225/50R17	94W	7.0	6.0	8.0	51	1477	25.9	9.2	8.0	11.9	811	10	23.1
SRW69	235/50R17	96W	7.5	6.5	8.5	51	1565	26.3	9.6	8.4	12.0	800	10	26.5
SRW95	245/50R17	99W	7.5	7.0	8.5	51	1709	26.7	10.0	8.7	12.2	790	10	28.7
SRW51	205/45R17/XL	88W	7.0	6.5	7.5	50	1235	24.3	8.1	7.1	11.3	856	10	21.9
SRW53	215/45R17/XL	91W	7.0	7.0	8.0	50	1356	24.6	8.4	7.4	11.4	842	10	21.6
SRW72	225/45R17/XL	94W	7.5	7.0	8.5	50	1477	25.0	8.9	7.8	11.5	834	10	22.7
SRW83	235/45R17	94W	8.0	7.5	9.0	51	1477	25.4	9.3	8.1	11.7	821	10	23.1
SRW79	245/45R17/XL	99W	8.0	7.5	9.0	50	1709	25.7	9.6	8.5	11.8	813	10	25.6
SRW50	245/40R17/XL	95W	8.5	8.0	9.5	50	1521	24.7	9.8	8.7	11.4	842	10	24.4
SRW63	275/40R17	98W	9.5	9.0	11.0	51	1653	25.7	11.1	9.8	11.8	813	10	28.7
SRH05	235/65R18	106H	7.0	6.5	8.5	51	2094	30.0	9.4	7.5	13.6	705	10	31.6
SRV34	225/60R18	100V	6.5	6.0	8.0	51	1764	28.6	9.0	7.3	13.0	738	10	28.3
SRV49	235/60R18/XL	107V	7.0	6.5	8.5	50	2149	29.1	9.4	7.7	13.2	725	10	32.4
SRH68	245/60R18	105H	7.0	7.0	8.5	51	2039	29.6	9.8	8.0	13.4	715	10	34.4
SRH74	215/55R18	95H	7.0	6.0	7.5	51	1521	27.3	8.9	7.4	12.5	771	10	28.1
SRV92	225/55R18	98V	7.0	6.0	8.0	51	1653	27.8	9.2	7.8	12.7	758	10	29.9
SRW25	225/50R18	95W	7.0	6.0	8.0	51	1521	26.9	9.2	8.0	12.4	781	10	28.3
SRW13	235/50R18/XL	101W	7.5	6.5	8.5	50	1819	27.3	9.6	8.4	12.5	771	10	28.9
SRW99	215/45R18/XL	93W	7.0	7.0	8.0	50	1433	25.6	8.4	7.4	11.9	811	10	22.4
SRW14	225/45R18/XL	95W	7.5	7.0	8.5	50	1521	25.9	8.9	7.8	12.0	803	10	23.6
SRW97	235/45R18	94W	8.0	7.5	9.0	51	1477	26.3	9.3	8.1	12.2	790	10	25.5
SRW17	245/45R18/XL	100W	8.0	7.5	9.0	50	1764	26.7	9.6	8.5	12.3	783	10	28.5
SRW19	255/45R18/XL	103W	8.5	8.0	9.5	50	1929	27.0	10.0	8.9	12.4	771	10	28.1
SRW78	225/40R18/XL	92W	8.0	7.5	9.0	50	1389	25.1	9.1	8.0	11.7	826	10	23.6
SRW82	235/40R18/XL	95W	8.5	8.0	9.5	50	1521	25.4	9.5	8.3	11.8	818	10	24.7
SRW84	245/40R18/XL	97W	8.5	8.0	9.5	50	1609	25.7	9.8	8.7	11.9	808	10	24.9
SRW96	255/40R18/XL	99W	9.0	8.5	10.0	50	1709	26.0	10.2	9.0	12.0	800	10	28.2
SRW26	255/35R18/XL	94W	9.0	8.5	10.0	50	1477	25.0	10.2	9.2	11.7	832	10	26.1

HTR A/S P02						UTQG - 600 A A, (HR/VR) 500 A A (WR)								
Product Code	Tire Size	Service Description	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall Diameter (in)	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
				Min. (in)	Max. (in)	Air (lbs psi)	Load (lbs)							
SRW86	235/55R19/XL	105W	7.5	6.5	8.5	50	2039	29.2	9.6	8.1	13.4	721	10	34.4
SRH73	245/55R19	103H	7.5	7.0	8.5	51	1929	29.6	10.0	8.5	13.5	711	10	35.4
SRW94	245/45R19	98W	8.0	7.5	9.0	51	1653	27.7	9.6	8.5	12.8	753	10	28.4
SRW64	245/40R19	94W	8.5	8.0	9.5	51	1477	26.7	9.8	8.7	12.4	776	10	30.0
SRW91	275/40R19	101W	9.5	9.0	11.0	51	1819	27.7	10.9	9.7	12.8	753	10	31.0
SRW35	255/35R19/XL	96W	9.0	8.5	10.0	50	1565	26.0	10.2	9.2	12.2	798	10	26.6
SRH87	235/55R20	102H	7.5	6.5	8.5	51	1874	30.2	9.6	8.1	13.9	698	10	33.1
SRV80	245/50R20	102V	7.5	7.0	8.5	51	1874	29.7	10.0	8.7	13.7	707	10	34.7
SRW93	245/45R20/XL	103W	8.0	7.5	9.0	50	1929	28.7	9.6	8.5	13.3	725	10	29.6
SRW85	255/45R20/XL	105W	8.5	8.0	9.5	50	2039	29.1	10.0	8.9	13.4	717	10	29.9
SRW75	275/40R20/XL	106W	9.5	9.0	11.0	50	2094	28.7	10.9	9.7	13.3	725	10	33.8
SRW20	255/35R20/XL	97W	9.0	8.5	10.0	50	1609	27.0	10.2	9.2	12.7	767	10	28.0

Velocity, Versatility, Value

INNOVATIVE DESIGN

Stylish and progressive design for exceptionally crisp, high-speed handling and responsiveness

COMPREHENSIVE SEGMENT COVERAGE

68 sizes, from 15 to 20-inch, in H, V, and W speed ratings for superior segment coverage

SUPERIOR ALL-SEASON PERFORMANCE

Multi-functional asymmetric design provides maximum wet, dry and winter weather grip

EXTENDED TREADWEAR

Next generation silica tread compound for extended mileage and treadwear

EXCEPTIONAL WARRANTY PROTECTION

Outstanding protection package for consumer confidence

