

# Ultra High Performance - HTR Z




## Ultra High Performance - HTR Z

- 1 V-shaped directional tread quickly disperses water providing superb wet grip and traction.
- 2 Four deep, wide circumferential tread grooves with two additional inner circumferential grooves provide excellent anti-hydroplaning performance.
- 3 Large angular shoulder blocks enhance steering response and overall dry grip.
- 4 Sidewall stiffeners improve steering response and overall handling without sacrificing ride comfort.



HTR Z									UTQG - 160 A A					
Product Code	Tire Size	Service Description	Measuring Rim Width (in)	Approved Rim Width		Maximum		Overall	Section Width (in)	Tread Width (in)	Static Loaded Radius (in)	Revs. Per. Mile	Tread Depth	Ship Weight (lbs)
				Min. (in)	Max. (in)	Air (lbs psi)	Load (lbs)	Diameter (in)						
5517662	245/45ZR17	95W	8.0	7.5	9.0	44	1,521	25.7	9.6	8.9	-	813	10	26.4
5517678	P275/40ZR17	93	9.5	9.0	11.0	44	1,433	25.7	10.9	10.2	12.0	800	9	30.8
5517682	P315/35ZR17	93	11.0	11.0	12.0	44	1,433	25.7	12.6	11.5	12.1	787	9	33.0

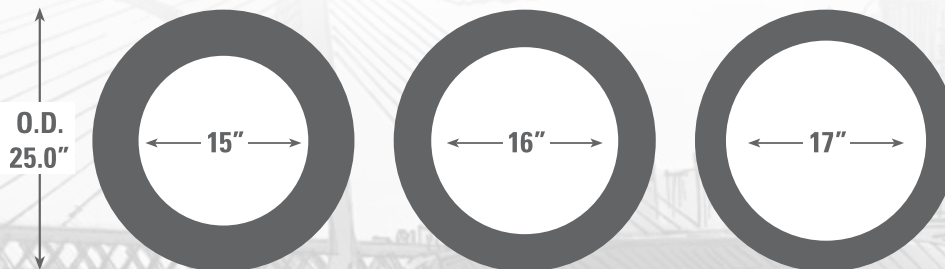

195/65R15 89V  
Original Size

205/55R16 90V  
HTR "Plus 1"

215/45R17 90V  
HTR "Plus 2"

### Plus Sizing

#### STEPS:

1. Increase tire width 10MM.
2. Decrease aspect ratio ten percent.
3. Increase wheel diameter one inch.
4. Keep close to (+/- two percent) OE tire diameter.
5. Ensure load index is equal to or above original tire or that it can carry actual load at an authorized air pressure.

Always ensure you check Plus Sizing choices for load and carrying capacity, inflation pressure changes that may be required and speed compatibility.