

ALL PARTS ARE TO BE INSTALLED BY A CERTIFIED ASE TECHNICIAN



2014 - 2017 Range Rover Sport L494 Chassis

Rear Air Spring

76R-15-R

Installation Guide



BEFORE YOU BEGIN THE REMOVAL OR INSTALLATION, PLEASE READ ALL OF THE INSTRUCTIONS THOROUGHLY!


THE WARRANTY WILL BE VOID IF INSTRUCTIONS ARE NOT FOLLOWED EXACTLY. DO NOT WORK UNDER A VEHICLE SUPPORTED BY A JACK.

ALWAYS SUPPORT THE VEHICLE ON SAFETY STANDS.


Rear Air Spring Removal

1. Using Land Rover approved diagnostic equipment depressurize the rear spring.


2. Raise and support the vehicle.

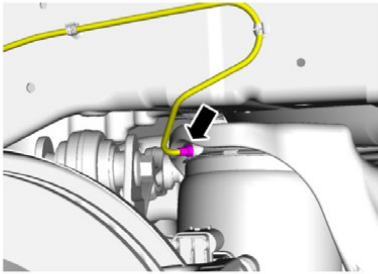

3. Remove air line from rear air spring.

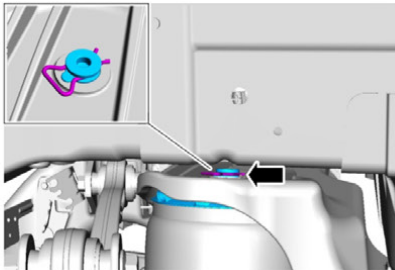

4. Remove retension clip from top of air spring.

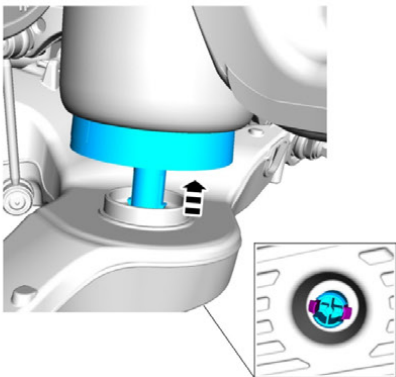


5. On bottom of control arm, squeeze retension clips of air spring bottom to release and pull air spring upward and away from lower control arm.



BEFORE YOU BEGIN THE REMOVAL OR INSTALLATION, PLEASE READ ALL OF THE INSTRUCTIONS THOROUGHLY!

THE WARRANTY WILL BE VOID IF INSTRUCTIONS ARE NOT FOLLOWED EXACTLY. DO NOT WORK UNDER A VEHICLE SUPPORTED BY A JACK.

ALWAYS SUPPORT THE VEHICLE ON SAFETY STANDS.

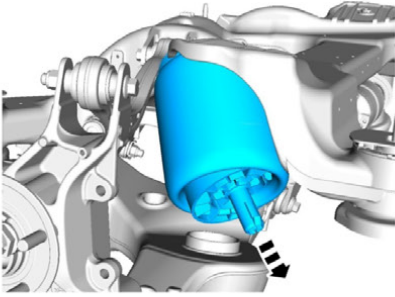

6. Slide air spring away from lower control arm and remove.

7. Install in reverse order.

ALL PARTS ARE TO BE INSTALLED BY A CERTIFIED ASE TECHNICIAN

Learn more about suspension parts on our website.