

SPORT GRIP®

INSTALLATION INSTRUCTIONS

READ INSTRUCTIONS CAREFULLY!

Not following these instructions can result in damage to your sportgrip.

COVERS TORN DURING INSTALLATION ARE NOT COVERED UNDER FACTORY WARRANTY.

**** Warm this cover before installing!**

There are several methods to warm your SportGrip.

- Leave opened SportGrip cover on the dashboard in direct sunlight until cover is warm to touch.
- If weather is cold, place cover over the defroster vent on the dashboard on high heat until cover is warm to the touch.
- Use a hair dryer to apply hot air to the cover until it is warm to the touch.


**** DO NOT USE YOUR FINGERTIPS INSIDE TO STRETCH COVER OVER STEERING WHEEL.**

1. Place cover over the top of your steering wheel. Seam should be toward the bottom of the wheel.

Seam should be toward the bottom of the wheel.

2. Insert your hands in between the steering wheel and the cover. Your knuckles should be touching the cover and the palm side of your hand should be touching the steering wheel.

3. Slide your hands toward the bottom of the steering wheel until you get some good resistance then stop. Move your hands up and down the steering when SLOWLY stretching the cover a little more each time until it slips over the bottom of the wheel.

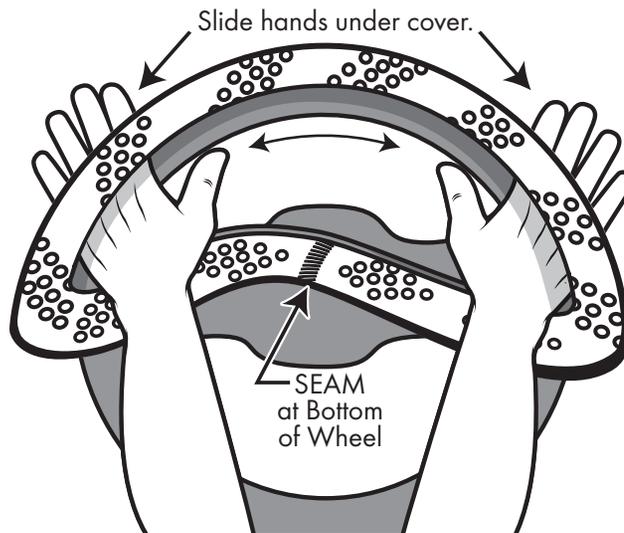


WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

2 Stretch SPORT GRIP over wheel with lace in position as shown. Overlap edges - tucking back edge under the front edge as you lace.


FRONT EDGE OVER
BACK EDGE UNDER

Position lace at bottom of wheel

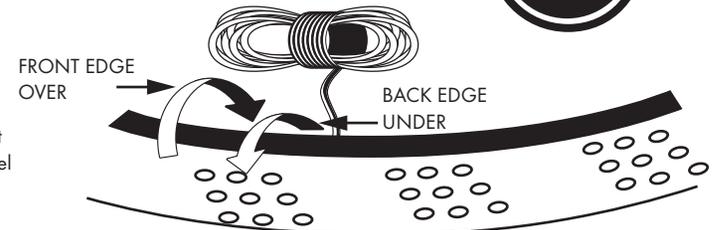


- Do not unravel lace as you wrap. Remove one section at a time from gathering.
- As you wrap cover, stretch lace approximately 25%.
- Sport Grip Size C may overlap on thinner steering wheels. For proper installation, make sure to pull tight, overlap material and lace repeatedly.


3 Stretch lace firmly as you wrap around wheel. Use non-perforated areas as your wrapping guide.

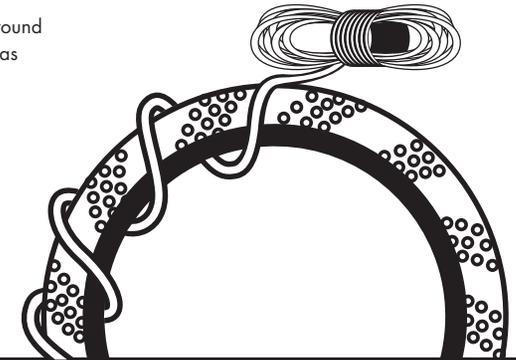

4 Under the last winding, insert as shown. Repeat operation on the next to last winding, as shown in illustration number 5.

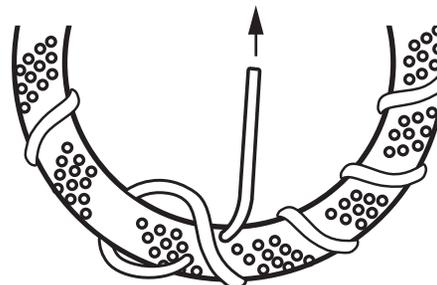


5 SPORT GRIP SIZE C may overlap on thinner steering wheels. For proper installation, make sure to pull tight, overlap material and lace repeatedly.

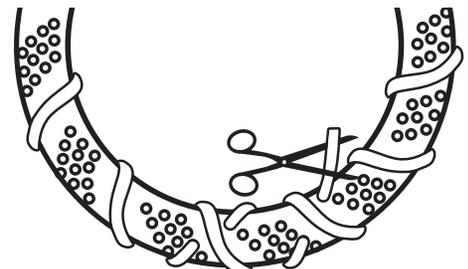

1 SPECIAL NOTE: Due to manufacturing techniques, some SPORT GRIPS have an opposite wrapping pattern than that shown in steps 2-5. Some wrap clockwise as in example "A" below. Some wrap counterclockwise as in example "B". After placing your SPORT GRIP over steering wheel, look at the examples below and notice in which direction the wrapping guide runs on your particular SPORT GRIP.

EXAMPLES

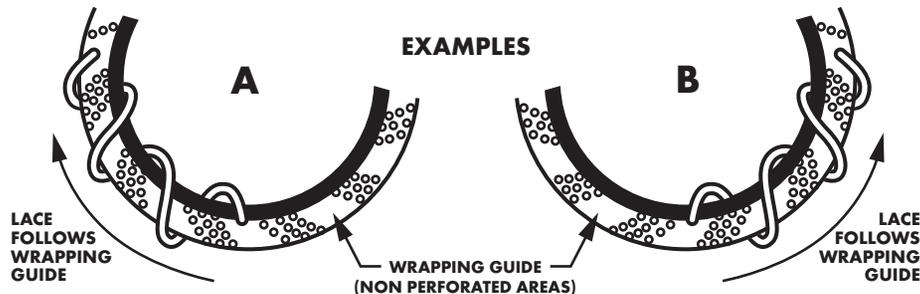

Now continue with steps 2-5 keeping in mind that you may have to wrap your wheel in the opposite direction than that shown in the illustration, depending on the direction of your wrapping guide.

Discover various steering wheels in our online store.