

21949
14-15 Toyota 4Runner



21949
14-15 Toyota 4Runner

14-15 Toyota 4 Runner Billet Grille 2pc Overlay

TOOLS REQUIRED:


Phillips Head Screwdriver

PARTS LIST

(8) #10 Screws
(8) #8 U Nut
(8) 1x3/16 Fender Washer


NOTE:

- We recommend painting all areas exposed behind grille black prior to installing for best results.

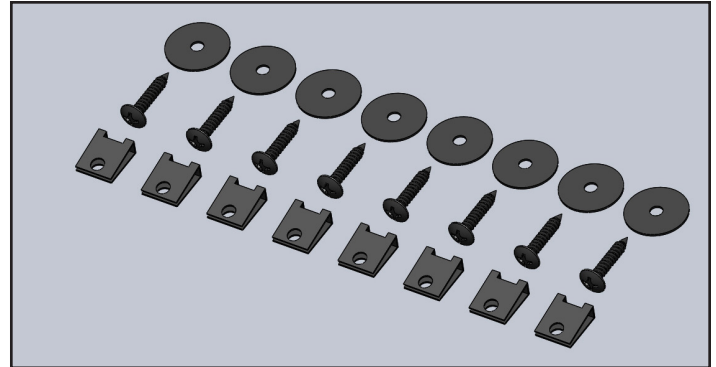

Step 1

Open hood and remove the 13 plastic push clips securing the plastic radiator shroud to the radiator core. Carefully use a flat head screwdriver to release the clip up, you can now remove the clips. Once all clips have been removed the plastic radiator shroud can be removed. (Fig 1)

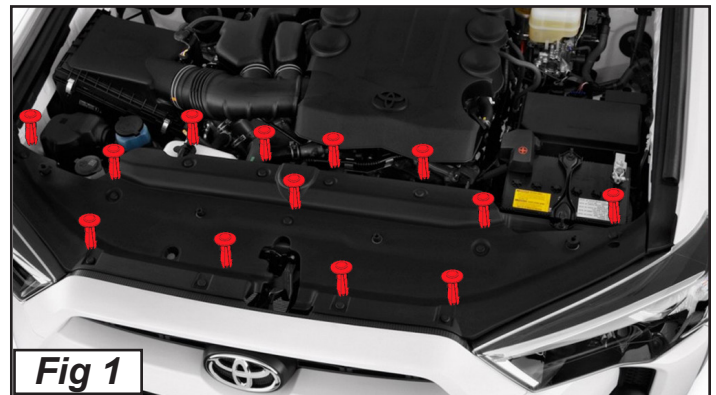

Step 2

Position the eight U nuts over the eight washers centering the center holes with the middle of the U nut. (Fig 2)



21949



21949

Step 3

Place the lower grille into the lower grille opening over the existing grille. Insert the screws into the mounting tabs between the bars. (Fig 3)



Fig 3

Step 4

Working from the back of the factory grille. Secure the screws to the grille by attaching the U nuts and washers on the backside of the factory grille. (Fig 4)

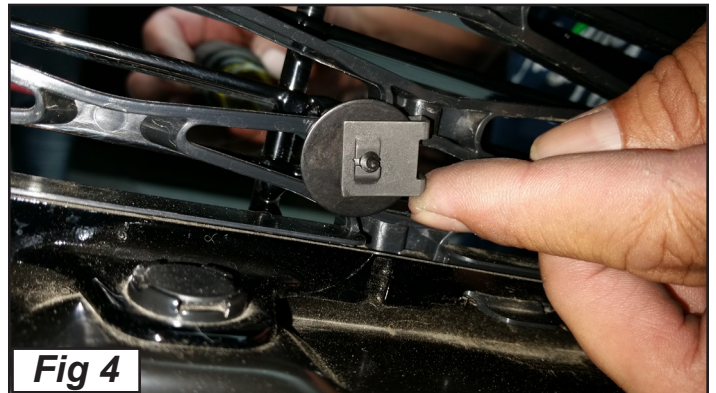


Fig 4

Step 5

Repeat step 3&4 with the two upper grille overlays. (Fig 5)



Fig 5

21949



21949

Step 6

Reattach upper radiator shroud in reverse fashion. Your installation is now completed. (Fig 9)

