

**21949**  
2014 Toyota 4Runner



**21949**  
2014 Toyota 4Runner

## 2014 Toyota 4 Runner Billet Grille 2pc Overlay

### TOOLS REQUIRED:

Phillips Head Screwdriver


### PARTS LIST

(8) #10 Screws  
(8) #8 U Nut  
(8) 1x3/16 Fender Washer

### NOTE:

- We recommend painting all areas exposed behind grille black prior to installing for best results.

**PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION.** Auto makers offer varied models to each vehicle and occasionally manufacture more than one body style of the same model.

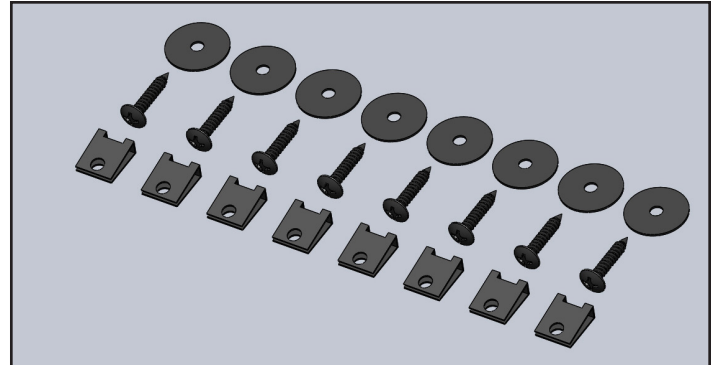

### Step 1

Open hood and remove the 13 plastic push clips securing the plastic radiator shroud to the radiator core. Carefully use a flat head screwdriver to release the clip up, you can now remove the clips. Once all clips have been removed the plastic radiator shroud can be removed. (Fig 1)



### Step 2

Position the eight U nuts over the eight washers centering the center holes with the middle of the U nut. (Fig 2)



**21949**  
2014 Toyota 4Runner



**21949**  
2014 Toyota 4Runner


**Step 3**

Place the lower grille into the lower grille opening over the existing grille. Insert the screws into the mounting tabs between the bars. (Fig 3)



**Step 4**

Working from the back of the factory grille. Secure the screws to the grille by attaching the U nuts and washers on the backside of the factory grille. (Fig 4)

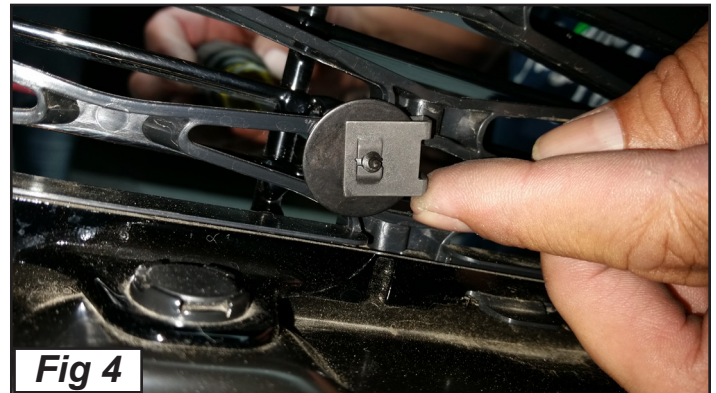

**Step 5**

Repeat step 3&4 with the two upper grille overlays. (Fig 5)



**21949**  
2014 Toyota 4Runner



**21949**  
2014 Toyota 4Runner

**Step 6**

Reattach upper radiator shroud in reverse fashion. Your installation is now completed. (Fig 9)

