

Installation Instructions

T-Connector



Cadillac XT5

⚠ WARNING




ALWAYS read and follow all warnings and instructions included with purchase before beginning installation. Keep for future reference.

DO NOT exceed lower of towing manufacturing rating (including in your vehicle owner's manual) or specific amperage ratings stated on product.

ALWAYS read, understand and follow all warnings and instructions printed on tow vehicle's battery.

ALWAYS wear safety glasses and use all safety precautions during installation.

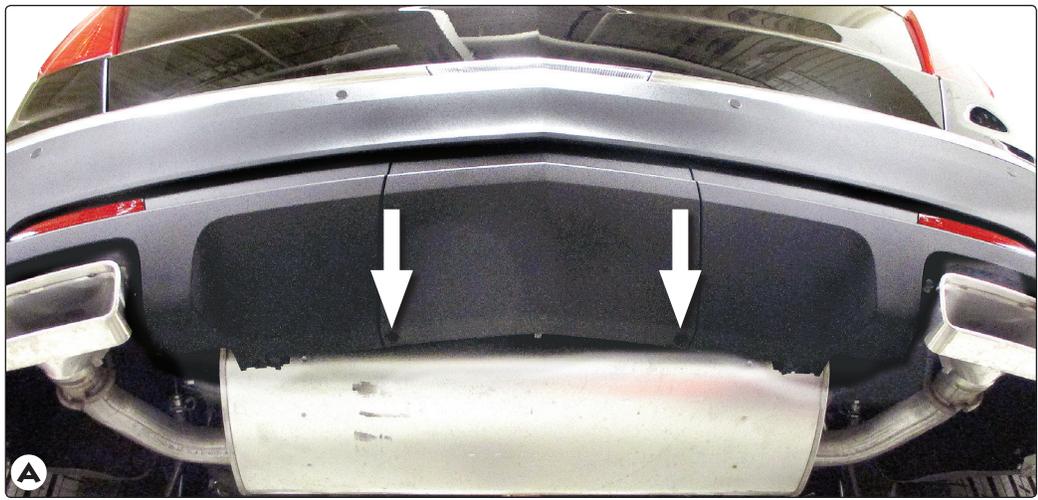

TOOLS REQUIRED:

Trim Panel Puller, Test-probe, 7 mm socket or Wrench

1. Locate access cover on vehicle rear bumper area. Using 7 mm socket or wrench, remove the two bolts holding cover to vehicle. Carefully remove cover and set aside **A**.
2. Locate the grey 4-Pin connector behind cover area. Remove factory tow harness protective cap and check to see if the mating surface is clean and free of dirt, clean if necessary. Insert the 4-Pin tow plug adapter and lock into place. Ensure that the connectors are fully inserted with locking tabs in place **B**.
3. Secure the remainder of the T-One® T-Connector harness with the cable ties provided, to prevent damage or rattling and being careful to avoid any areas that would pinch, cut or melt the wire.
4. Mount the 4-Flat end in an accessible location with a bracket or electrical box (not included).
5. Replace the cover removed during installation.

⚠ WARNING

All connections must be complete for the T-One® T-Connector to function properly. Test and verify installation with a test light or trailer once installed. For initial test, reset vehicle electrical system by temporarily removing the key from the ignition.



⚠ WARNING

Overloading circuits can cause fires. **DO NOT** exceed stated product ratings. Read vehicle's owner's manual & instruction sheet for additional information.