

Installation Instructions

T-Connector



Honda Accord

⚠ WARNING









ALWAYS read and follow all warnings and instructions included with purchase before beginning installation. Keep for future reference.

DO NOT exceed lower of towing manufacturing rating (including in your vehicle owner's manual) or specific amperage ratings stated on product.

ALWAYS read, understand and follow all warnings and instructions printed on tow vehicle's battery.

ALWAYS wear safety glasses and use all safety precautions during installation.

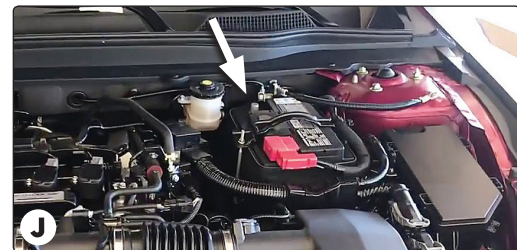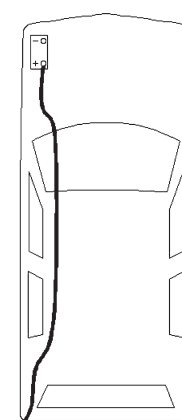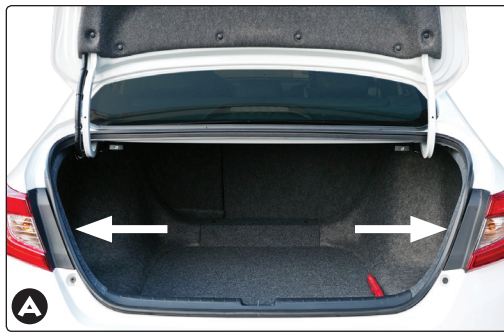

ENGLISH

TOOLS REQUIRED:

Trim Panel Remover, 10mm Socket & Ratchet or 10mm Wrench, Drill (3/32" Drill Bit), 1/4" socket, Wire Crimpers, Wire Cutters, Philips Head, Screwdriver, Test-probe

1. On each side, locate the plastic cover between the taillights and the trunk opening. Using a trim panel puller, carefully pull the plastic cover that is covering the bolts holding the taillights in place. **A B**
2. Locate the bolts that hold the taillights in place. Using a philips head screwdriver or 10mm socket, remove the bolts (2 each side). Carefully pull the taillights away from the vehicle being careful not to damage the alignment pins. **C D**
3. From inside the trunk, temporarily remove the rear threshold plate. Partially remove the felt trunk liner behind the taillights. Locate grommet in between taillight pocket and trunk. On both the driver's and passenger's side, pull the vehicle taillight wire harness and unseat the grommet. Disconnect the vehicle wiring harness from both taillight sockets. Remove the taillight housing and set aside. **E F**
4. Route the T-Connector ends through the hole and into the tail lamp pocket and reseal the grommet around the wires. Leaving the 4-Flat and black converter box in the cargo area.
5. On the driver's side, insert the T-Connector end, with the yellow wire, between the vehicle wiring connectors and lock into place. Be careful not to damage the locking tabs and be sure that connectors are fully inserted with locking tabs in place. **D**

6. Route the T-One® Connector end with green wire to the passenger 's side behind the panels and along the threshold.
7. On passenger side, route the T-Connector ends through the hole and into the tail lamp pocket and reseal the grommet around the wires.
8. Plug the T-Connector end with the green wire in-between the mating plugs on the Passenger's side taillight socket and vehicle wiring harness.
9. On the driver's side, locate a suitable grounding point near the connector such as the vehicle's frame or crossmember. (Do not drill into vehicle floor or bed.) Clean dirt and rustproofing from area. Drill a 3/32" hole and secure white wire using eyelet and screw provided.
⚠ WARNING
Verify what is behind any surface prior to drilling to avoid damage to the vehicle and/or personal injury. Do not drill into any exposed surfaces.
10. On the driver's side, locate the black 12 ga. Power wire from the T-Connector box. Attach the black 12 ga. wire provided. Route the black wire along the exterior frame or follow the existing wiring along the thresholds into the engine compartment up to the battery avoiding areas that may pinch or break the wire.
⚠ WARNING
If routing the wire thru a grommet and along the exterior of the vehicle, be careful to avoid any hot pipes, heat shields, the fuel tank or any other points that may pinch or break the wire.

11. Disconnect the vehicle's Negative (-) battery cable. If not removed, remove the fuse from the yellow fuse holder (provided). After cutting the fuse holder wire, attach the ring terminal and secure to the vehicle's Positive (+) battery cable. Connect the other end of the fuse holder to the black 12 ga. wire, using the yellow butt connector (provided).
⚠ WARNING
Read and follow all warnings and cautions printed on the tow vehicle's battery. **G H I J**
12. Reconnect the vehicle's Negative (-) battery cable and install the 15 amp fuse into the fuse holder from step 8.
⚠ WARNING
All connections must be complete for the T-One® T-Connector to function properly. Test and verify installation with a test light or trailer once installed. For initial test, reset vehicle electrical system by temporarily removing the key from the ignition.
13. Locate a flat surface in an out of the way place and mount the T-One® T-Connector's black box-module, to prevent damage or rattling. Secure the remainder of the T-One® T-Connector harness with the cable ties provided, to prevent damage or rattling and being careful to avoid any areas that would pinch, cut or melt the wire.
NOTE
Store 4-Flat in trunk area when not in use.
⚠ WARNING
Overloading circuits can cause fires. **DO NOT** exceed stated product ratings. Read vehicle's owner's manual & instruction sheet for additional information.