
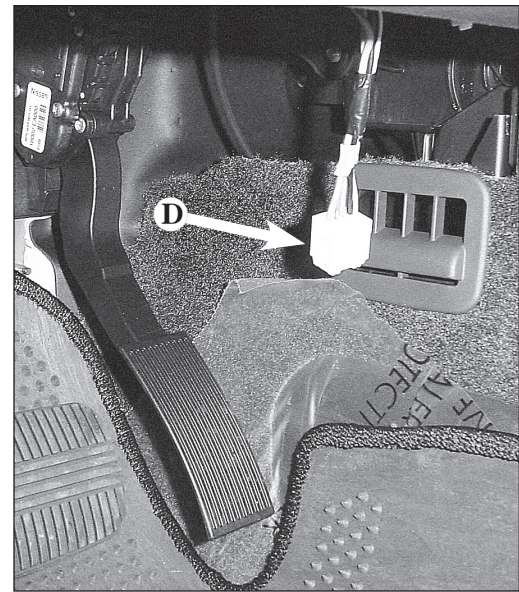
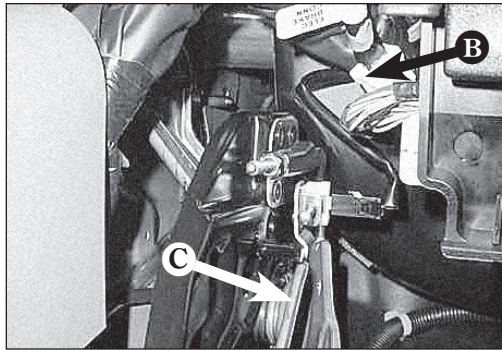


Installation Instructions

Electric Trailer Brake Control Wiring Adapter


READ THIS FIRST:

Read and follow all vehicle warnings and installation instructions before beginning installation. Wear safety glasses and use all safety precautions during installation.

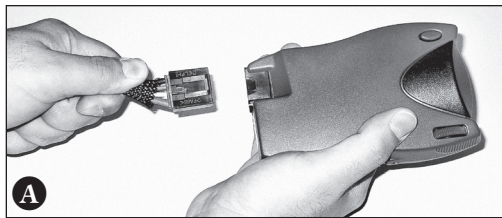

VEHICLE STOP LAMP SWITCH TO
BRAKE CONTROLLER (INPUT)

FUSED TRAILER BRAKE
CONTROLLER BATTERY FEED

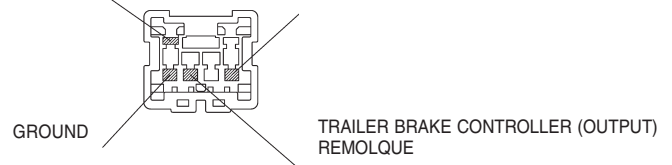

Wiring Adapter Housing (containing Male Terminals) - Pin Side (Mating Side)

CAUTION

Plug brake control adapter into mating receptacle on backside of brake control before attaching to the vehicle connector. **A**

1. Titan/Armada Infiniti QX56 ONLY

Locate the vehicle's electric brake control harness connector **B**. The harness will be located underneath the dash and left of the steering column, taped to another harness near the emergency brake pedal **C**. There will be a 6-pin connector that mates with the one on the adapter.

Frontier/Pathfinder Xterra ONLY

Locate the vehicle's electric brake control harness connector **D**. The harness will be located underneath the dash and right of the steering column, taped to another harness. There will be a 6-pin connector that mates with the one on the adapter.

2. Plug the brake control adapter into the vehicle's electric brake control harness connector. Follow all brake control manufacturer's installation instructions.

NOTE

Vehicles not equipped with OEM trailer tow package, may require fuses and relays to complete output & battery feed circuits (sold separately). Consult owners manual for locations.

WARNING

Complete the installation per the electric brake control manufacturer's instructions and mount the unit as directed. Perform test procedures as instructed.



WARNING

Overloading circuit can cause fires. DO NOT exceed lower of towing manufacturer rating or:
• Max. 3 axles: 6 brakes (18 amps)
Read vehicle's owners manual and instruction sheet for additional information.