




Jeep JL 4.5" Spring Lift

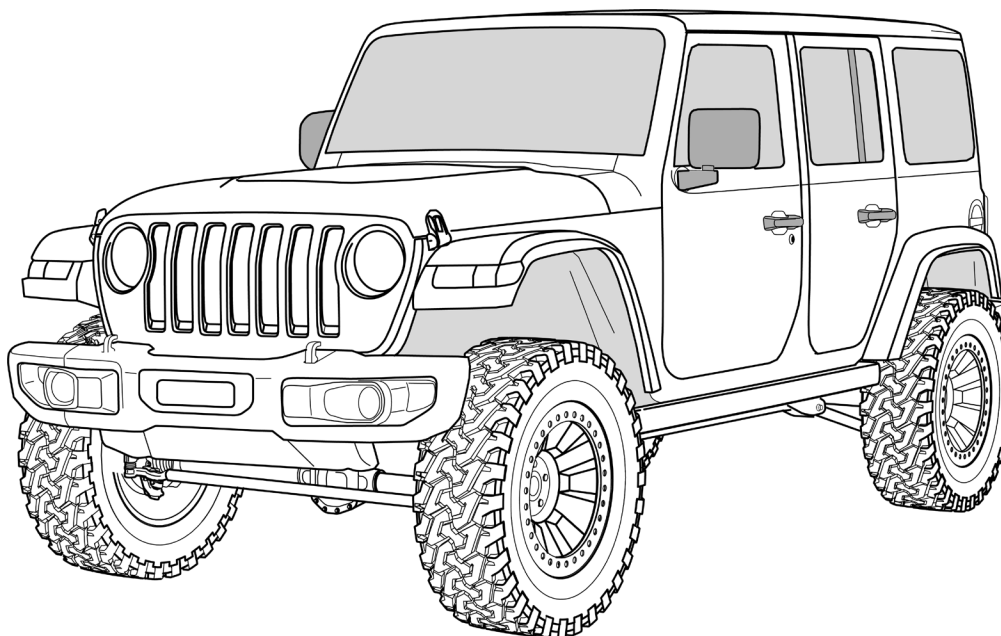

Important Notes:

Prior to beginning this install, or any installation, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications. A factory service manual should be used in conjunction with these installation instructions.

This product will change the highway handling characteristics of your vehicle, exercise caution. After altering the suspension it is always advisable to have an alignment done by a competent 4 wheel drive shop or by an alignment shop that is experienced with lifted 4 wheel drive vehicles.

Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing please contact your local TeraFlex dealer for assistance.

NOTE: Some form of caster correction is required for the base spring lift kit





















If a 37" tire is being installed on a Sport or Sahara additional up travel limit may be required using Bumpstop Spacer Kit #1959300.





Tools Needed:

- Metric Sockets and Open End Wrenches
- Torque Wrench
- Factory Service Manual
- General Mechanics Tools


Maintenance Note:

After the first 300 miles and every 3,000 miles after that, re-torque all the suspension components and bolts.


			Alpine CT4		Sport ST4		Base Spring Lift			
			4DR	2DR	4DR	2DR	4DR	2DR		
			Description		Item #					
Spring Box Components		1	Front	02-21-401-400-1	2	-	2	-	2	-
				02-21-201-400-1	-	2	-	2	-	2
		2	Rear Left	02-22-411-400-1	1	-	1	-	1	-
				02-22-211-400-1	-	1	-	1	-	1
		3	Rear Right	02-22-421-400-1	1	-	1	-	1	-
				02-22-221-400-1	-	1	-	1	-	1
		4	Front Bumpstops	12-01-109-200	2	2	2	2	2	2
		5	Rear Bumpstops	12-01-209-200	2	2	2	2	2	2
		6	Rear Bumpstop Bracket	12-02-209-002	2	2	2	2	2	2
		7	Rear Bumpstop Mounting Strap	12-02-209-001	2	2	2	2	2	2
		8	Front Bumpstop Spacers	12-02-109-050	4	4	4	4	4	4
		9	Rear Bumpstop Spacers	12-02-209-050	4	4	4	4	4	4
		10	Front Swaybar link 10.75"	744500	2	2	2	2	2	2
		11	Rear Swaybar Link 11.50	21-01-001-115	2	2	2	2	2	2
		12	M10 x 1.5 Fuji Nut	23-07-03-001	6	6	6	6	6	6
		13	M10 x 1.5 x 100mm Flat Socket Cap Screw	45-04-003-001	2	2	2	2	2	2
		14	M10 x 1.5 x 50mm Socket Cap Screw	45-03-003-001	4	4	4	4	4	4
		15	M10 x 1.5 x 25mm Button Socket Cap Screw	45-05-003-003	4	4	4	4	4	4
		16	M10 Lock Washer	45-12-002-001	4	4	4	4	4	4
		17	Nut Wrench Tool	600271	1	1	1	1	1	1
		18	Brake Line Anchor Kit	1101255	1	1	1	1	1	1
		19	Front Track Bar Bracket Kit	1953500	1	1	1	1	1	1
	20	Rear Track Bar Bracket Kit	1953600	1	1	1	1	1	1	
	21	M12 x 1.75 x 55mm Button Socket Cap Screw	45-05-003-001	2	2	2	2	2	2	
	22	M12 x 1.75mm Black Fuji Nut	23-07-02-002	2	2	2	2	2	2	

	Description	Item #	Alpine CT4		Sport ST4		Base Spring Lift		
			4DR	2DR	4DR	2DR	4DR	2DR	
Other Boxed Kits		Jounce Bumpers Kit	1959200	1	1	1	1	-	-
		Alpine Control Arm Kit	1310510	1	1	-	-	-	-
		Front Track Bar Kit	07-02-110-110	1	1	-	-	-	-
		Front Drop Bracket Kit	1938125	-	-	1	1	-	-

Note: If installing Drop Bracket Kit Refer to Instruction #999309 before continuing.

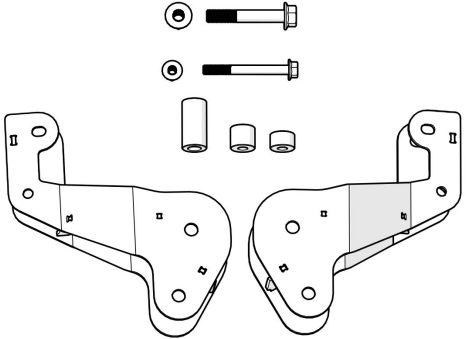




Note: If installing Alpine Control Arm Kit Refer to Instruction #999321 before continuing.

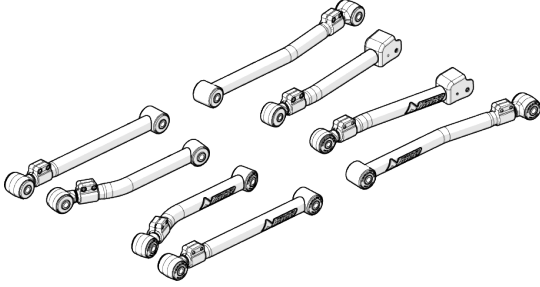


INSTALL CONTROL ARMS OR DROP BRACKETS WITH THE JEEP ON THE GROUND. THE WEIGHT OF THE JEEP WILL MAKE THE INSTALLATION EASIER

LEAVE CONTROL ARM BOLTS LOOSE UNTIL THE END OF THE LIFT INSTALLATION


FRONT INSTALLATION LIFT AND SUPPORT AT FRAME

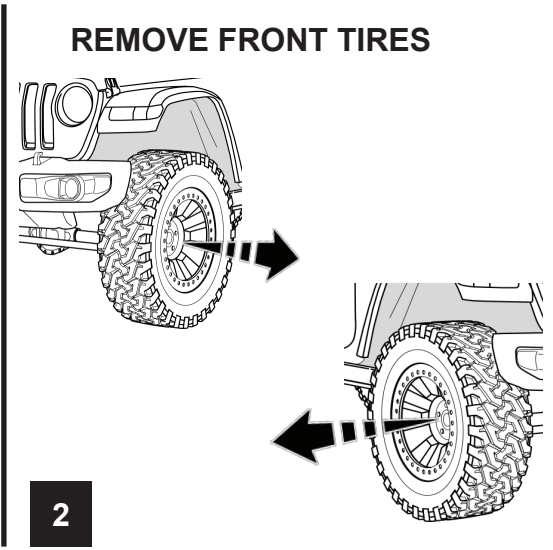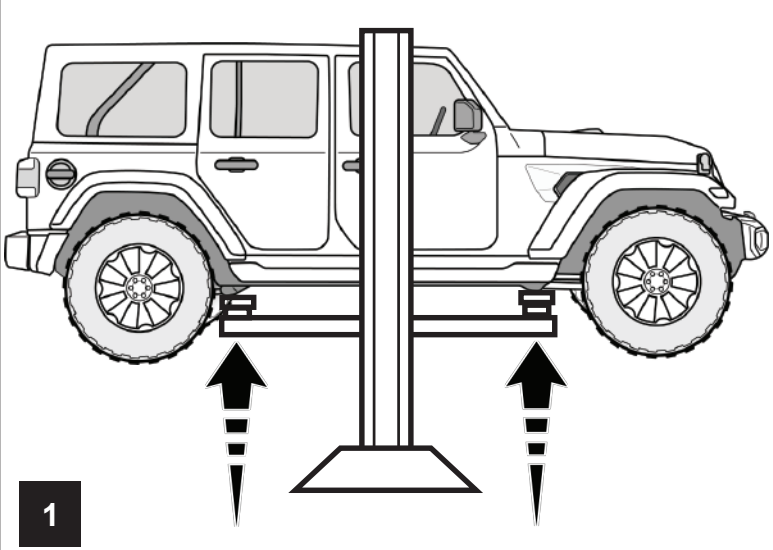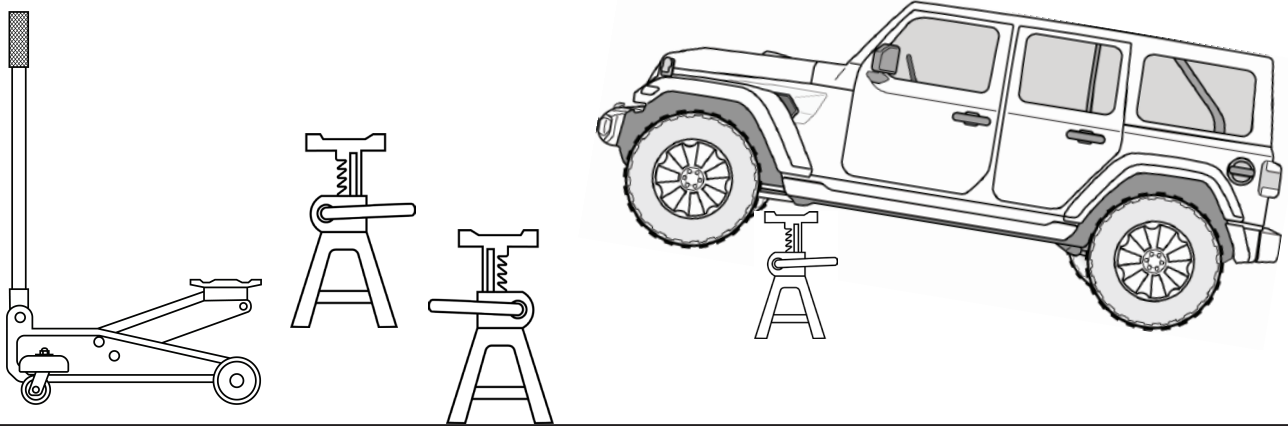


SUPPORT FRONT AXLE

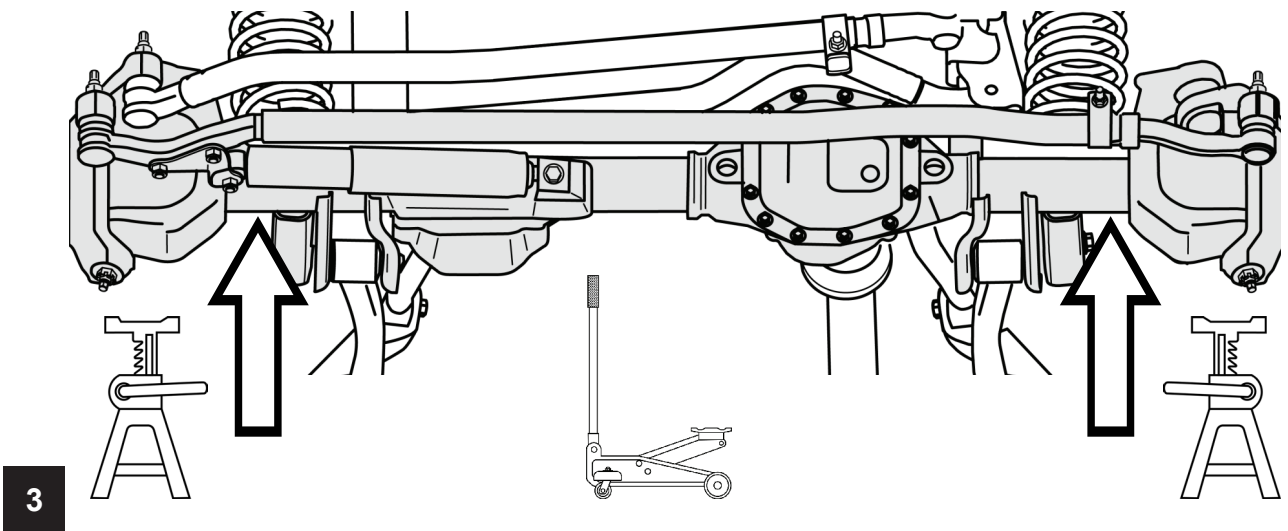


REMOVE SWAY BAR LINKS & REMOVE TRACK BAR BOLT AT AXLE

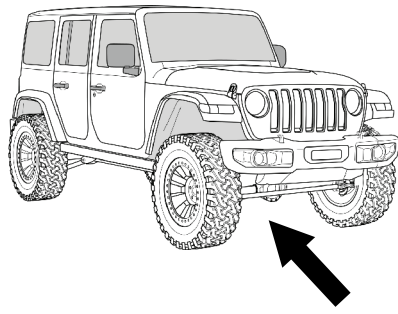

**REMOVE &
DISCARD**

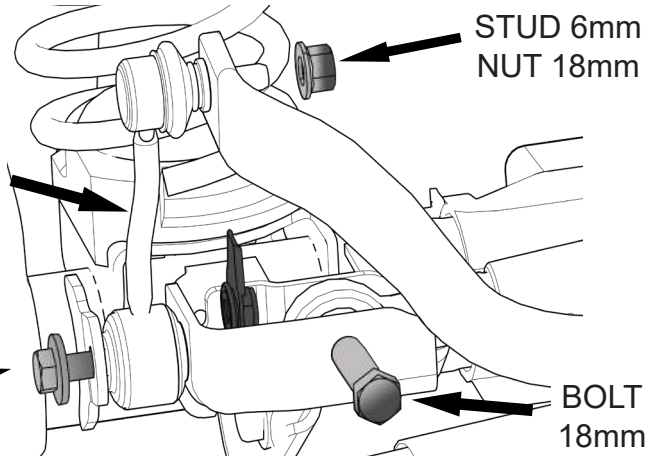


4

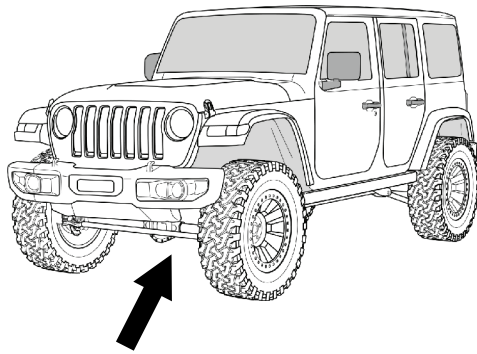

REMOVE NUT 18mm


STUD 6mm HEX KEY

**REMOVE &
DISCARD**

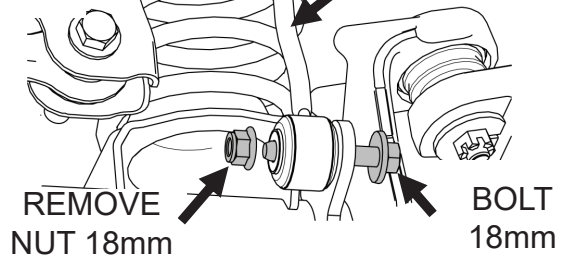


5


Note: If installing Front Track Bar Kit, you can fully remove the stock front track bar and discard.

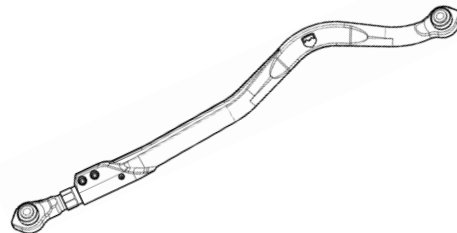


REMOVE AND DISCARD BRAKE LINE BRACKETS FROM LOWER CONTROL ARMS

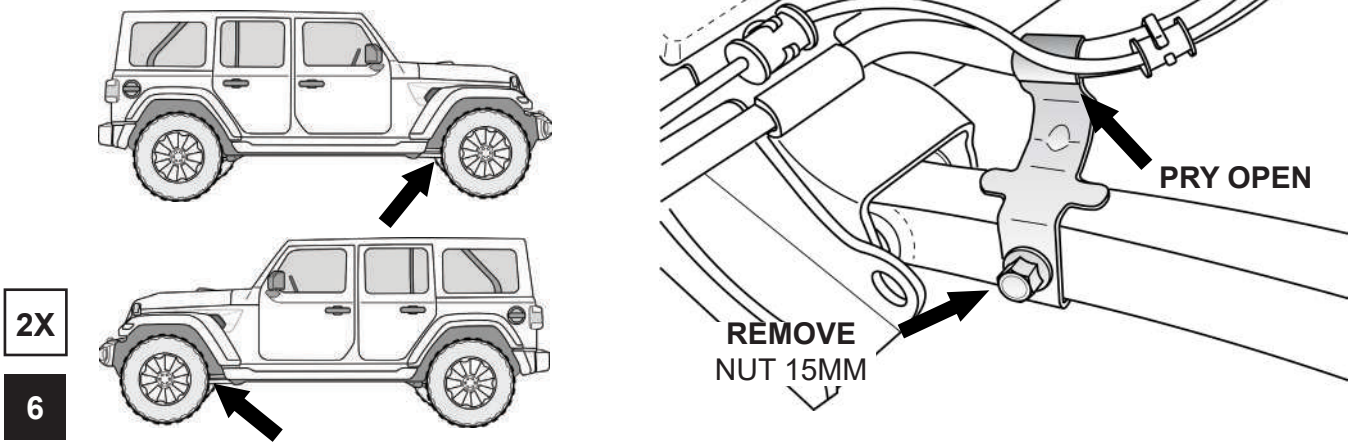



DISCONNECT ACTUATORS AND VENT HOSE AT THE FRONT AXLE

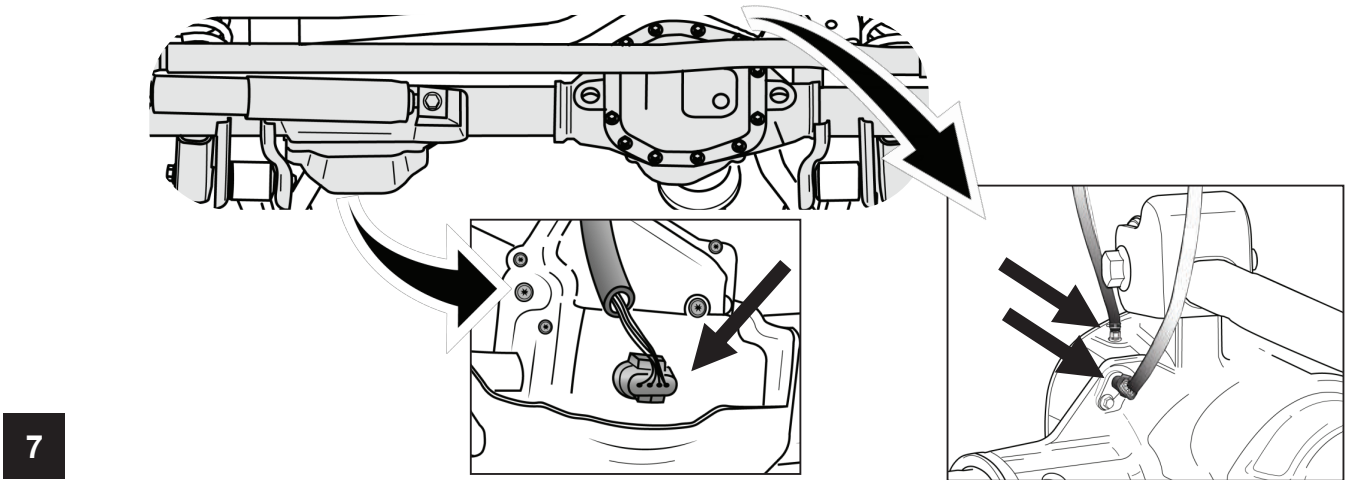

LOOSEN FRONT CONTROL ARM BOLTS DO NOT REMOVE THE CONTROL ARM BOLTS

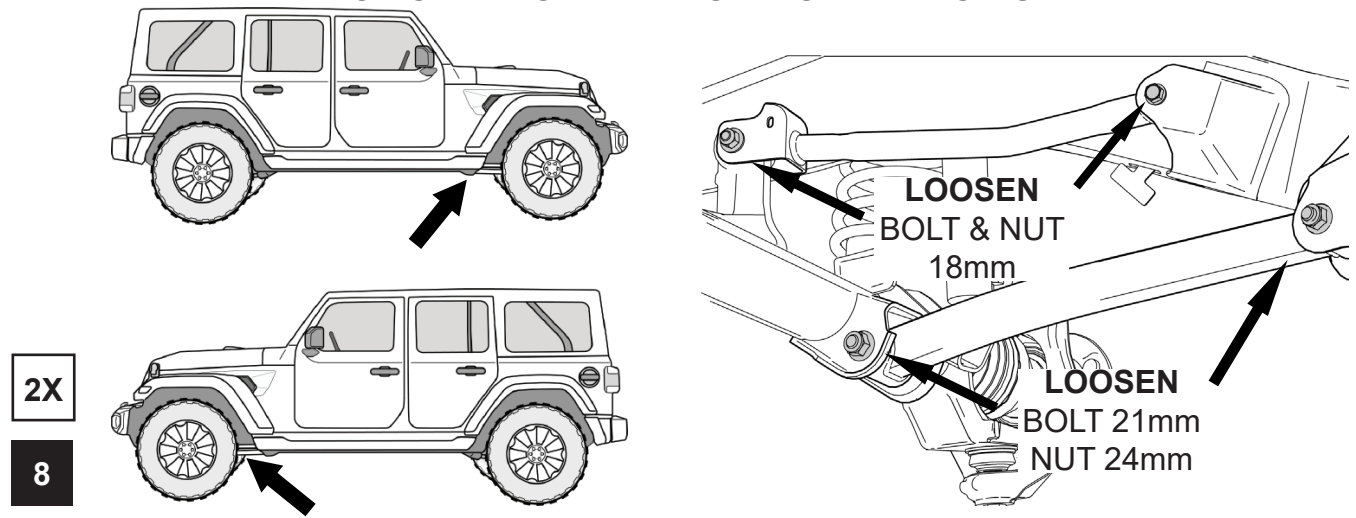


REMOVE FRONT SHOCKS

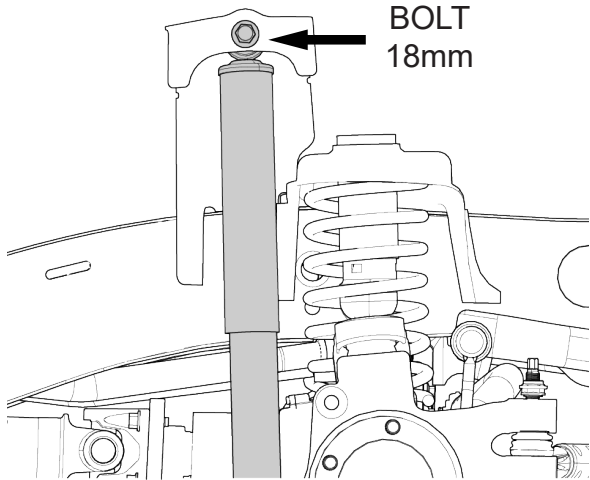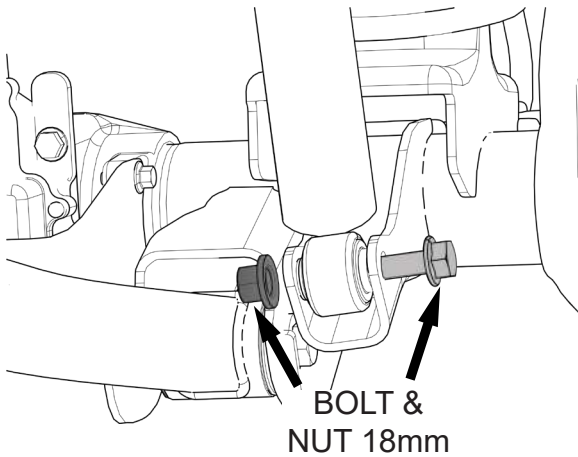


2X
9

LOWER AXLE AND REMOVE FRONT SPRINGS

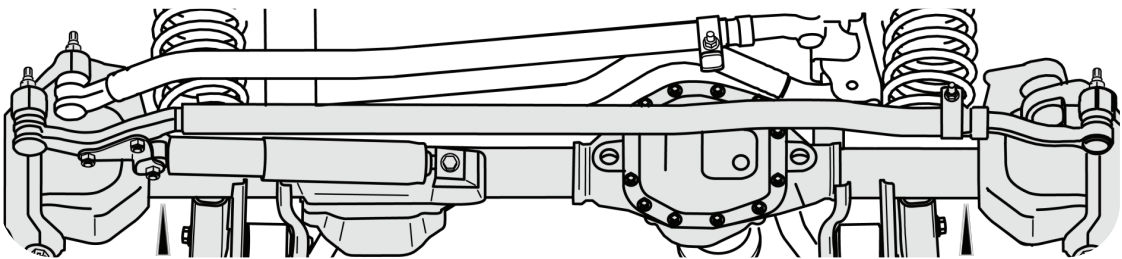

NOTE: REMOVE ANY PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED.

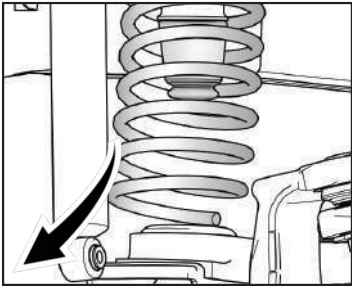

2X
10


INSTALL BUMPSTOP INTO NEW FRONT SPRING

Note: If installing Falcon Jounce Bumpers refer to instruction #999308 before installing springs.


Two cylindrical jounce bumpers with the Falcon logo on them.

2X
11

TIP: ZIP TIE BUMPSTOP TO SPRING

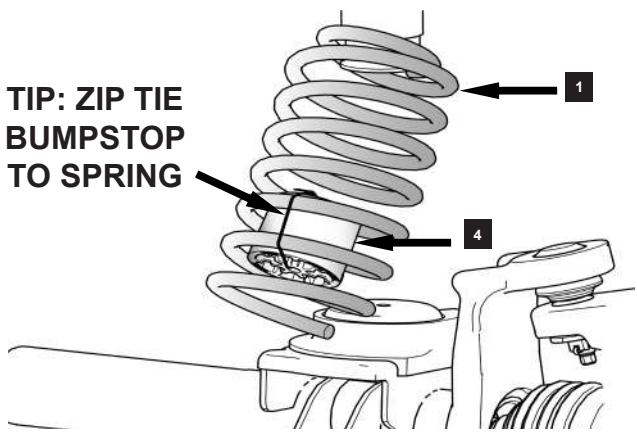


NOTE: REFER TO PAGE 18 FOR BUMPSTOP SPACER GUIDE

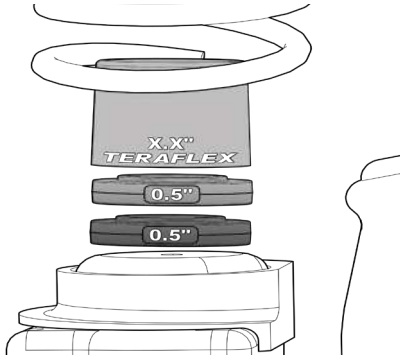


2X

12

TORQUE 12 FT-LBS

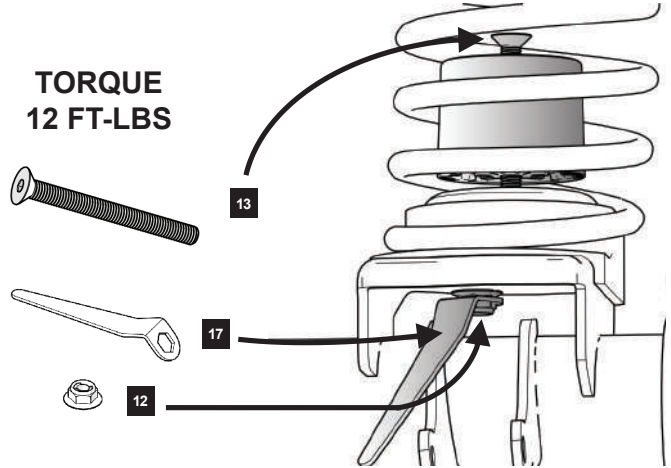


FULLY SEAT THE SPRINGS INTO THE LOWER SPRING ISOLATOR

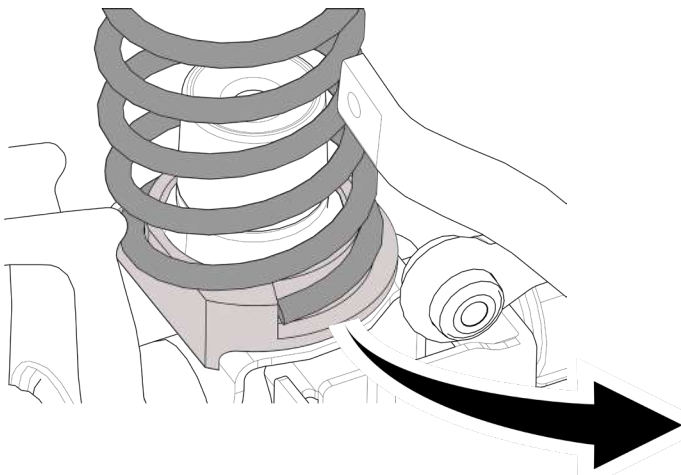


2X

13

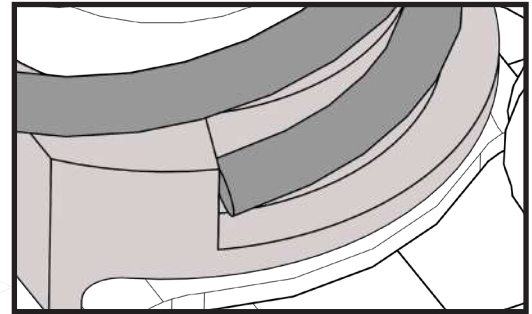


RAISE AXLE & INSTALL SHOCKS

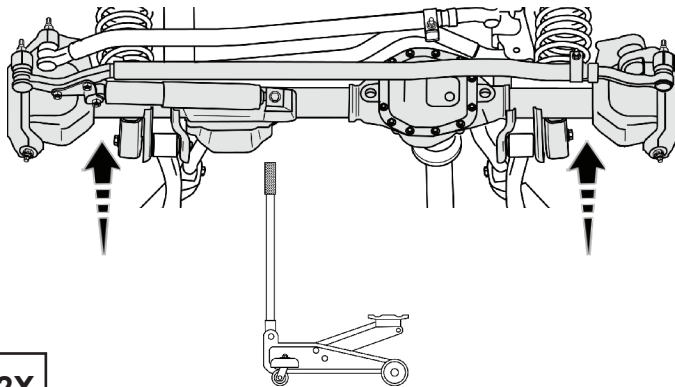

2X


14

INSTALL FRONT FALCON SHOCKS AT THIS TIME

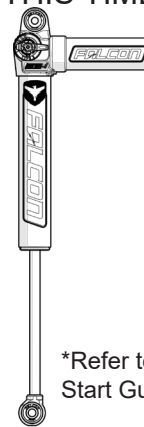

**Refer to the Quick Start Guide.*

INSTALL BRAKE LINE ANCHORS

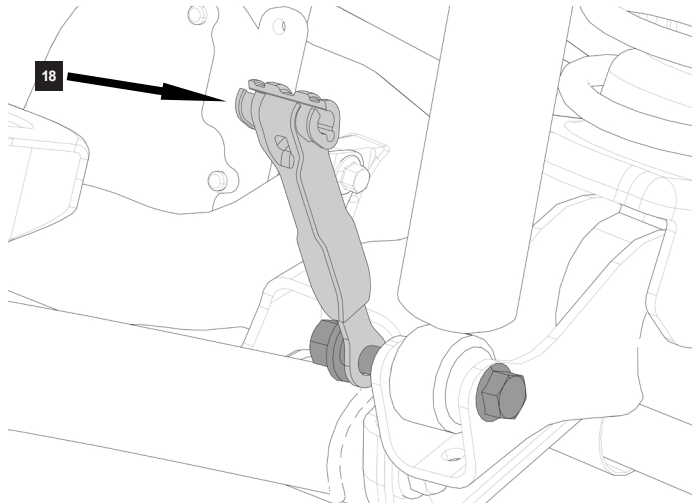


REFER TO THE INSTRUCTIONS ON THE BACK OF THE BRAKE LINE ANCHOR KIT BOX FOR PROPER INSTALLATION.

2X

15


INSTALL NEW SWAY BAR LINKS

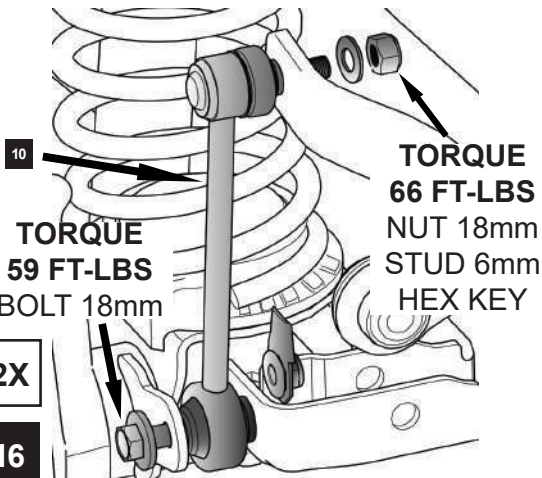

2X

16

RECONNECT CONNECTIONS TO FRONT AXLE


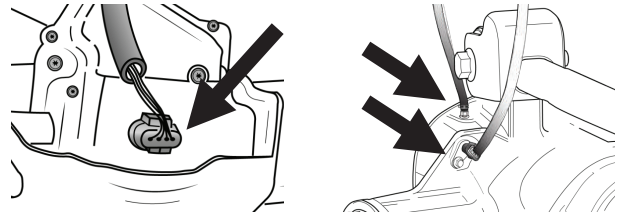


RECONNECT PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED.




NOTE: DO NOT TIGHTEN THE CONTROL ARM BOLTS UNTIL THE JEEP IS ON THE GROUND
WAIT TO INSTALL TRACK BAR UNTIL THE END OF THE LIFT KIT INSTALL.

17


NOTE: IF ONLY FRONT OF JEEP WAS LIFTED, REINSTALL TIRES AND LOWER JEEP BACK TO THE GROUND BEFORE LIFTING THE REAR

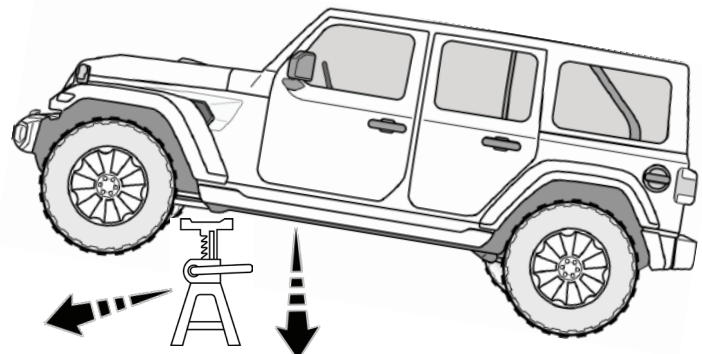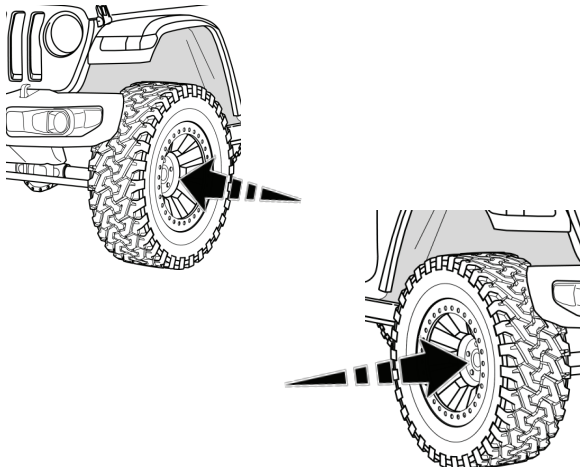



REAR INSTALL LIFT AND SUPPORT AT FRAME

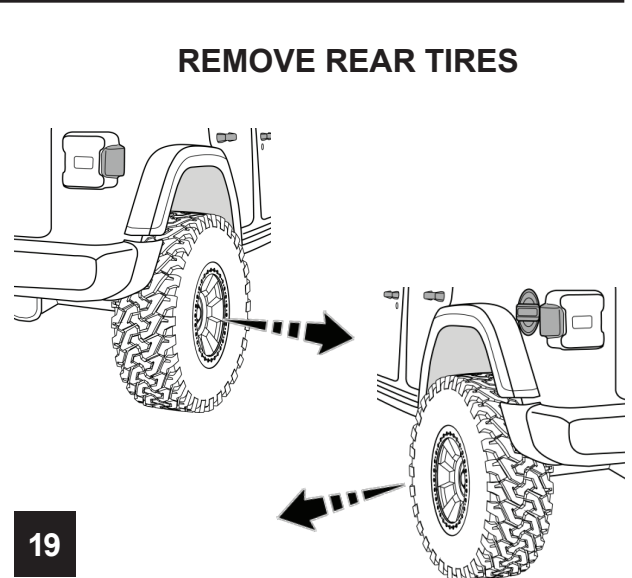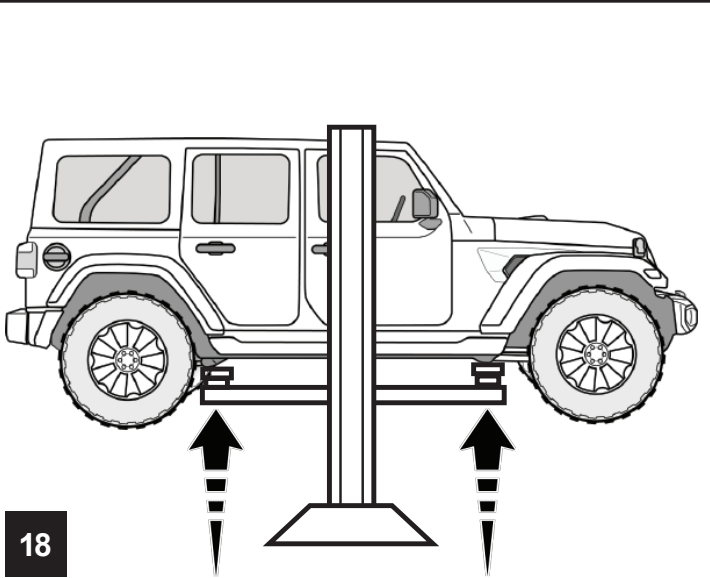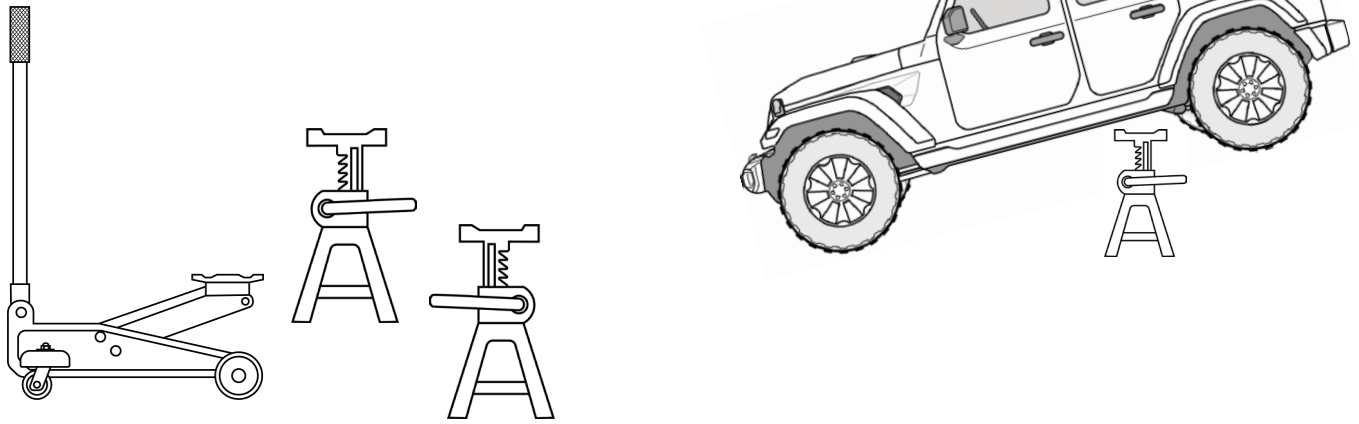

SUPPORT REAR AXLE



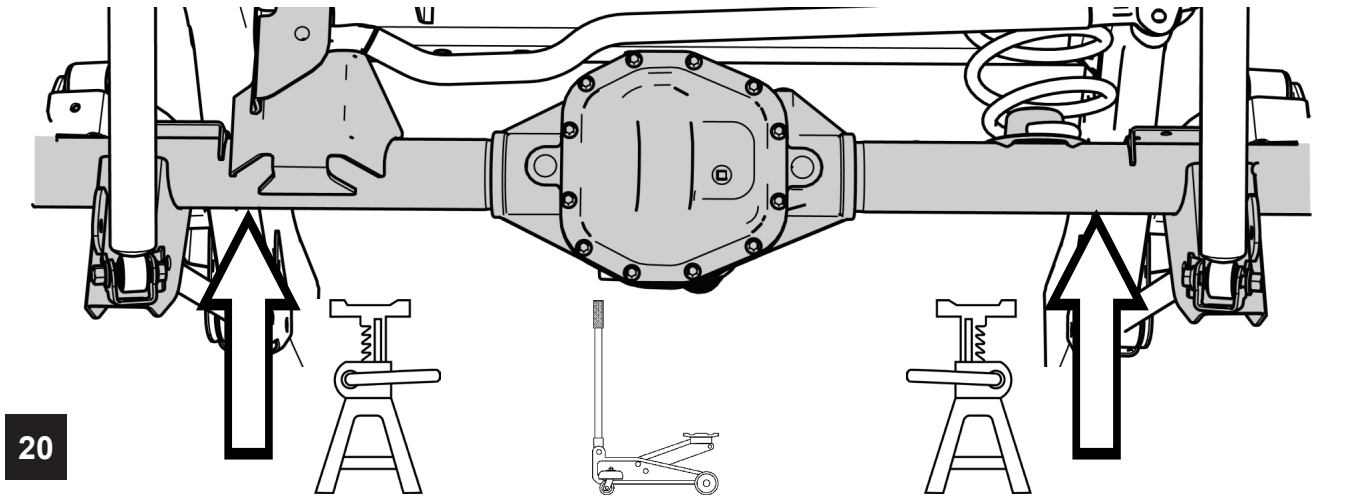


REMOVE E-BRAKE CABLE BRACKET AND DISCARD

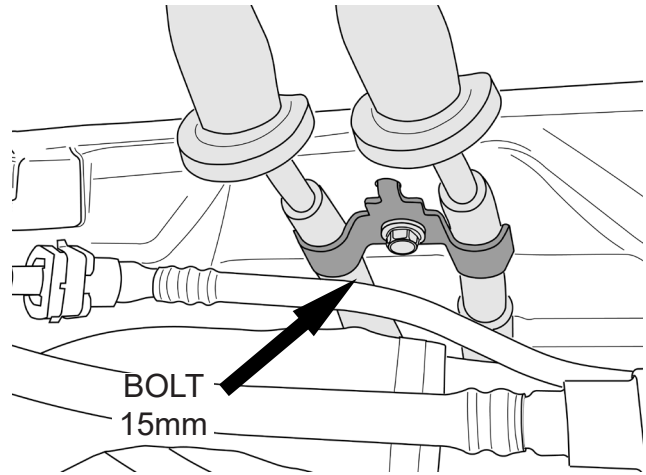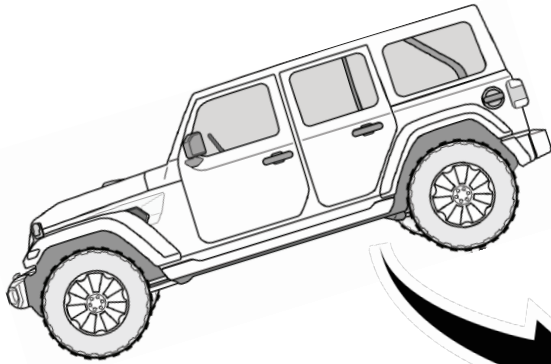

21


SET THE E-BRAKE AND CLAMP BOTH E-BRAKE EYELETS AGAINST BACKING PLATES WITH LOCKING PLIERS

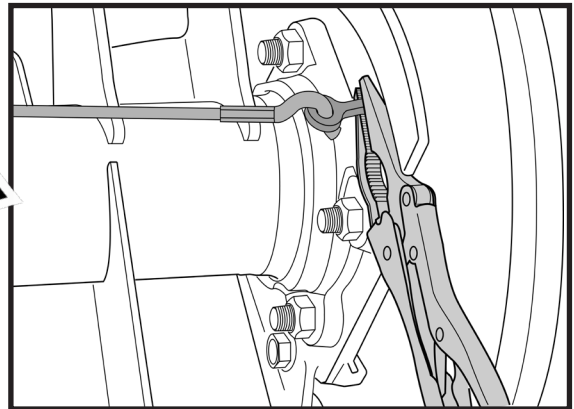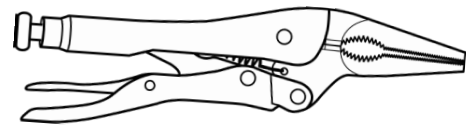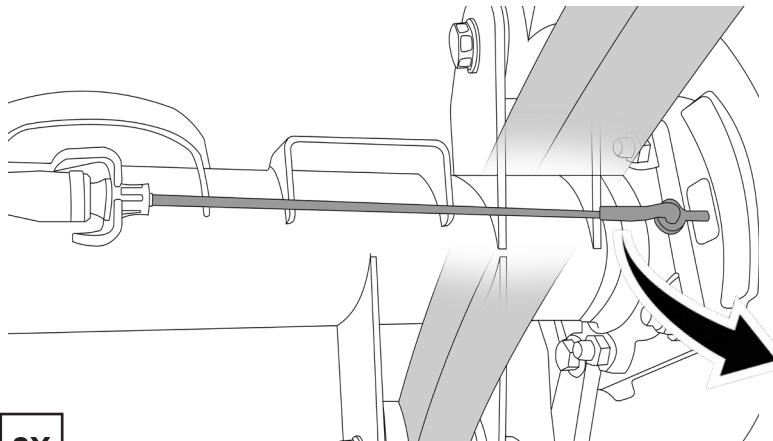


2X

22

RELEASE E-BRAKE AND DISCONNECT CABLES FROM BOTH EYELETS AND AXLE BRACKETS

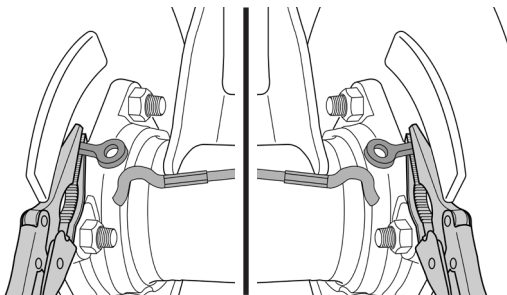

2X

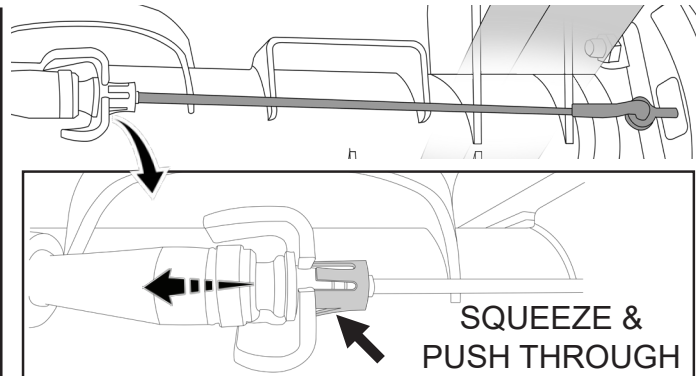


23

NOTE: DO NOT REMOVE LOCKING PLIERS FROM E-BRAKE EYELETS


SQUEEZE & PUSH THROUGH

ROUTE E-BRAKE CABLES UNDER CROSS MEMBER AND FUEL LINES.

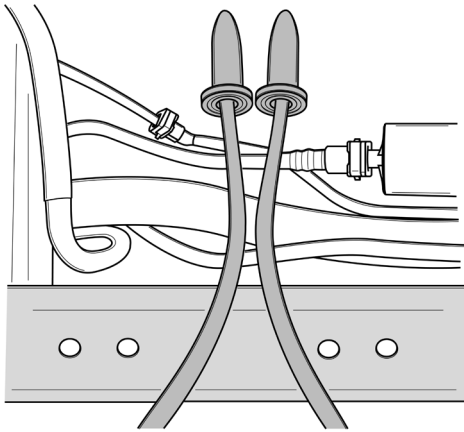

24

RECONNECT E-BRAKE CABLES TO THE AXLE BRACKETS AND THEN THE E-BRAKE EYELETS.

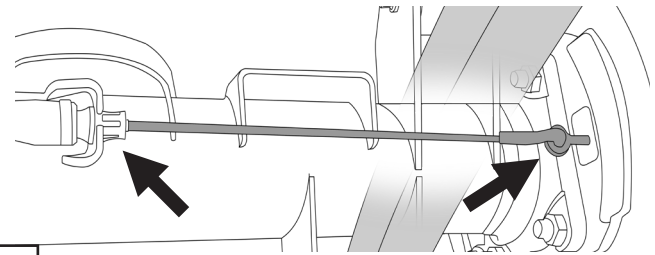


2X

REMOVE PLIERS FROM E-BRAKE EYELETS

25


LOOSEN REAR CONTROL ARM BOLTS

DO NOT REMOVE THE CONTROL ARM BOLTS

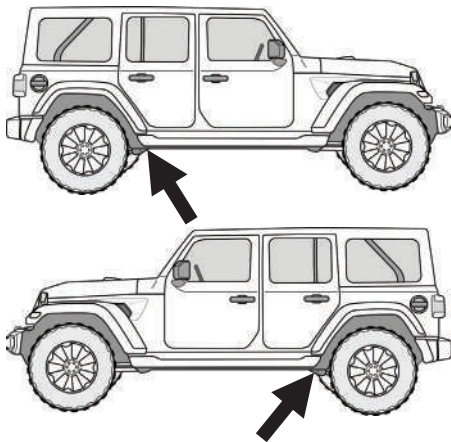


2X

26

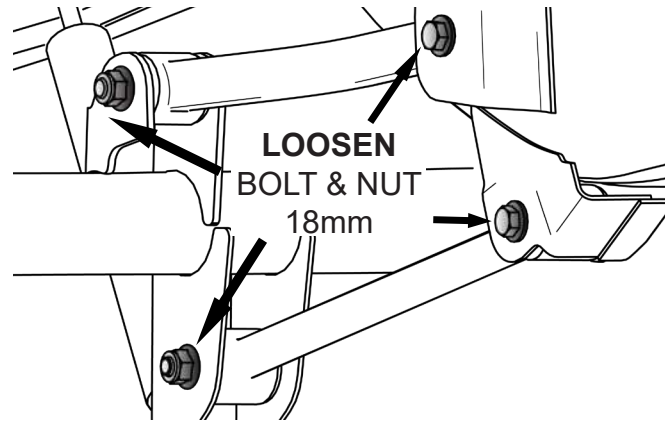


REMOVE AND DISCARD SWAY BAR LINKS

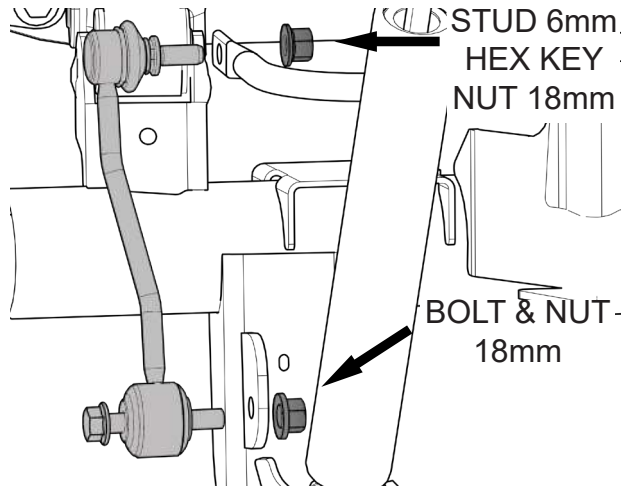


2X

27


REMOVE BRAKE LINE BRACKETS FROM BOTH SIDES OF THE AXLE

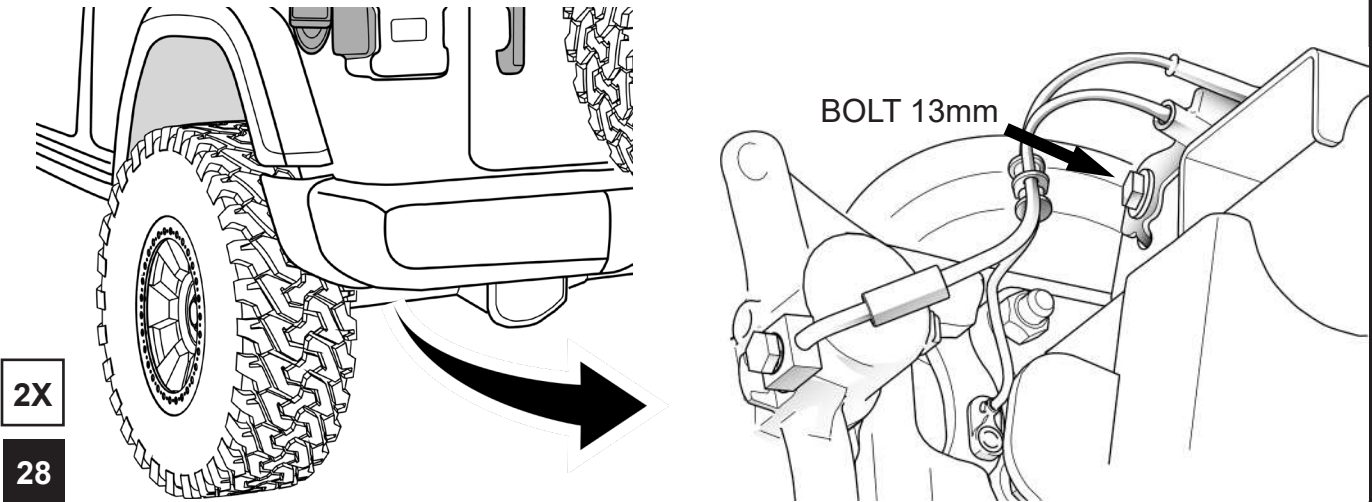



REMOVE THE TRACK BAR FROM THE AXLE

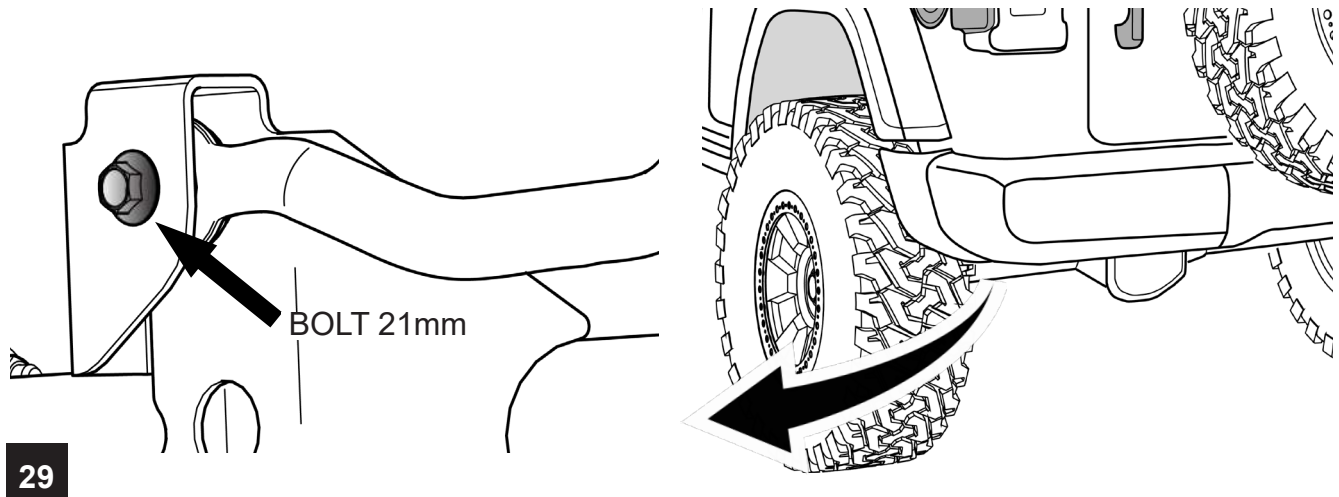

REMOVE THE REAR SHOCKS

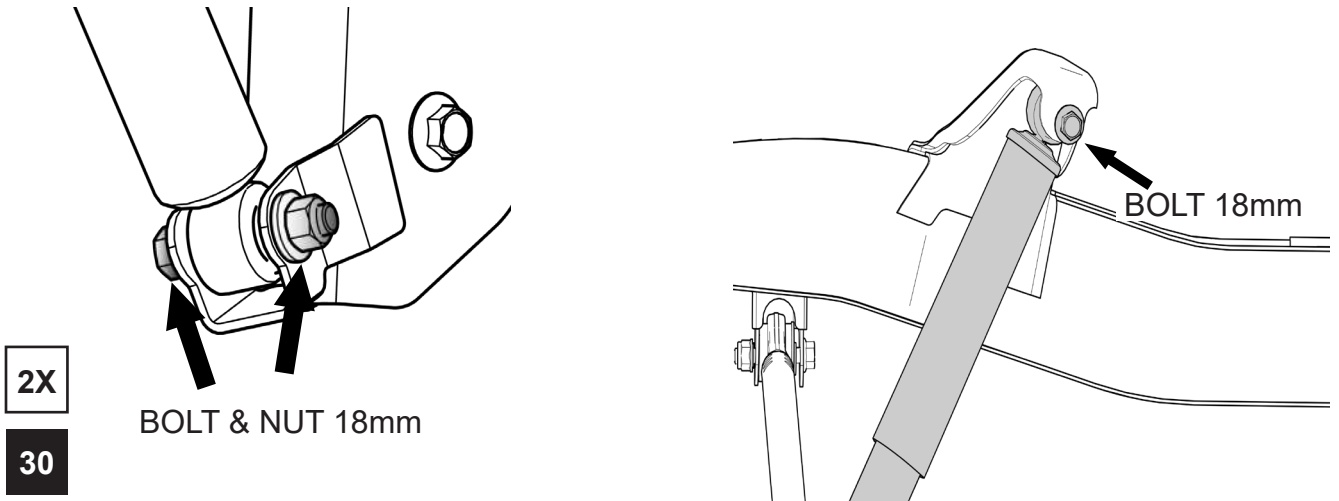

LOWER AXLE TO REMOVE & DISCARD REAR SPRINGS

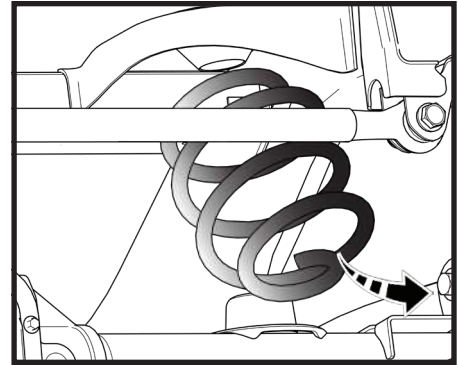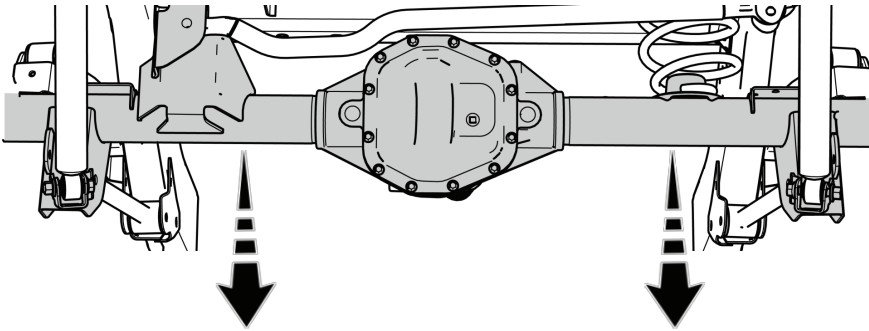

2X

31

NOTE: REMOVE ANY PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED.


INSTALL NEW REAR SPRINGS

INSTALL THE DRIVERS SIDE SPRING FIRST

LEFT REAR SPRINGS
4 DOOR: 02-22-411-400-1
2 DOOR: 02-22-211-400-1

NOTE: PAY SPECIAL ATTENTION TO INSTALL THE CORRECT SPRING ON THE CORRECT SIDE OF THE JEEP. THE REAR SPRINGS ARE SIDE SPECIFIC.


32

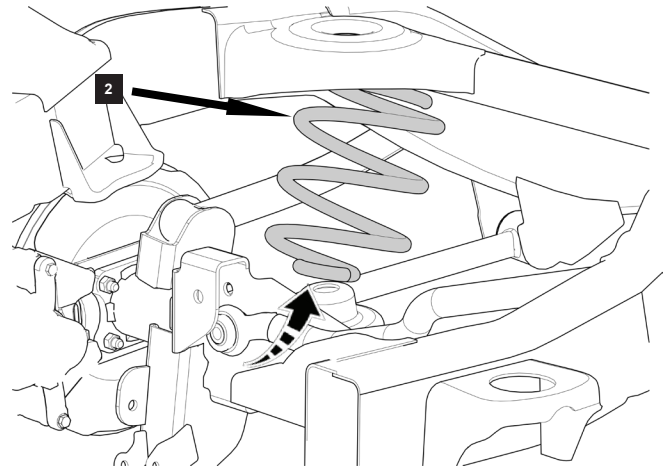


INSTALL THE PASSENGERS SIDE SPRING

RIGHT REAR SPRINGS
4 DOOR: 02-22-421-400-1
2 DOOR: 02-22-221-400-1

33

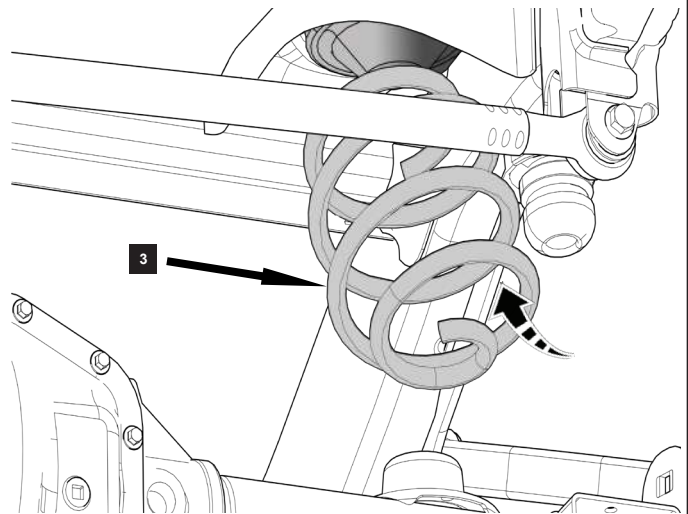


RAISE THE REAR AXLE AND INSTALL SHOCKS

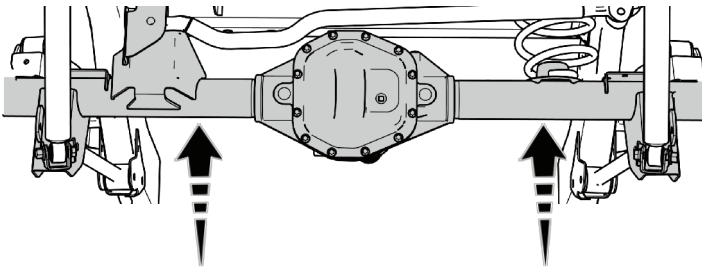


MAKE SURE TO FULLY SEAT THE SPRINGS INTO THE UPPER SPRING ISOLATOR

34

INSTALL REAR FALCON SHOCKS AT THIS TIME




*Refer to the Quick Start Guide.

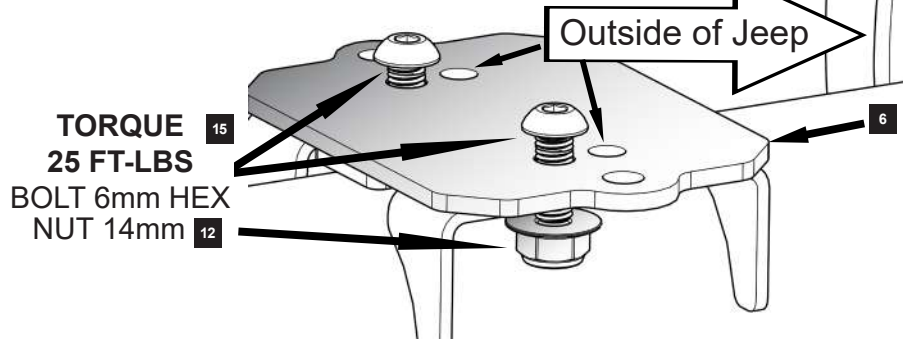

TORQUE 25 FT-LBS
BOLT 6mm HEX
NUT 14mm

Outside of Jeep

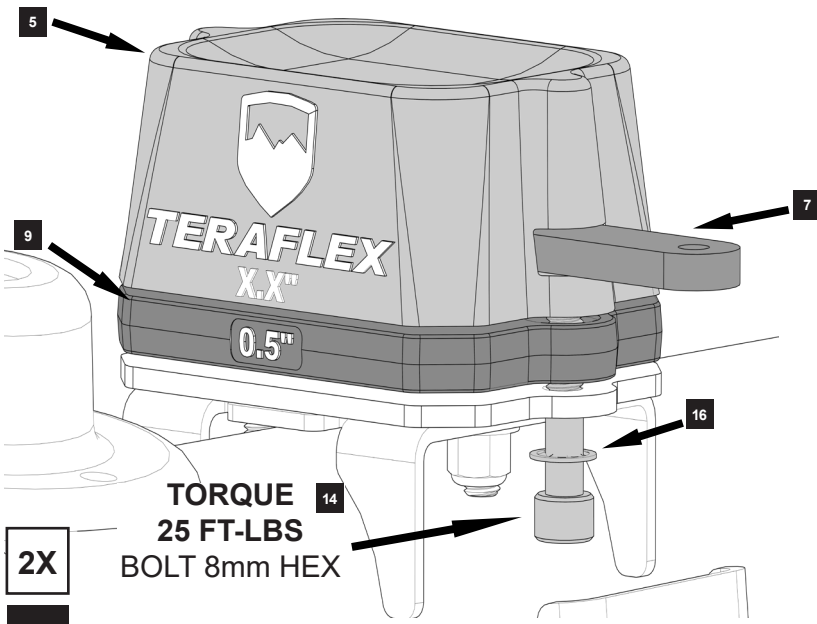


TORQUE 25 FT-LBS
BOLT 8mm HEX

2X

35


NOTE: REFER TO PAGE 18 FOR BUMPSTOP SPACER GUIDE

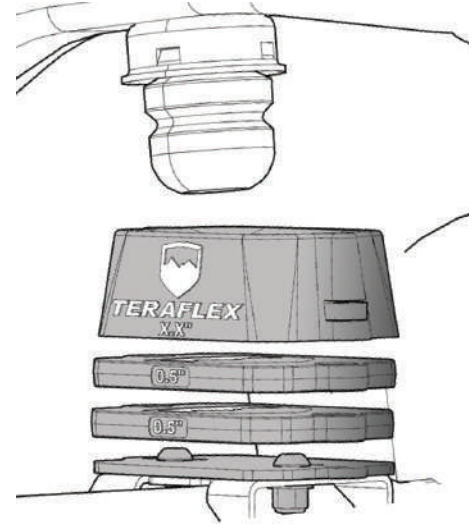

REINSTALL AXLE BRAKE LINE BRACKETS

RECONNECT PLASTIC RETAINERS FROM WIRING OR HOSES AS NEEDED

REINSTALL BOLT 13mm

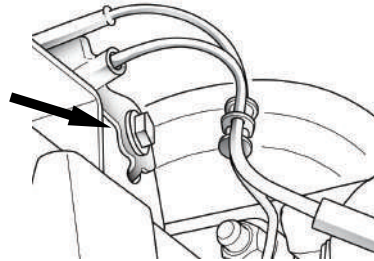


NOTE: DO NOT TIGHTEN THE CONTROL ARM BOLTS UNTIL THE JEEP IS ON THE GROUND

36

INSTALL NEW SWAY BAR LINKS


TORQUE 45 FT-LBS
NUT 19 mm
BOLT 8mm
HEX KEY

TORQUE 66 FT-LBS
NUT 19mm
STUD 6mm
HEX KEY

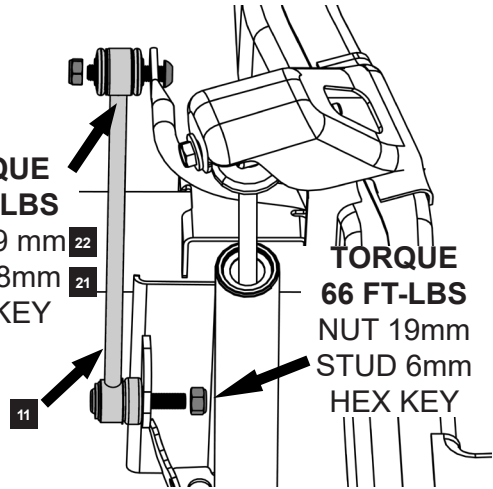

37


REINSTALL TIRES AND LOWER TO THE GROUND

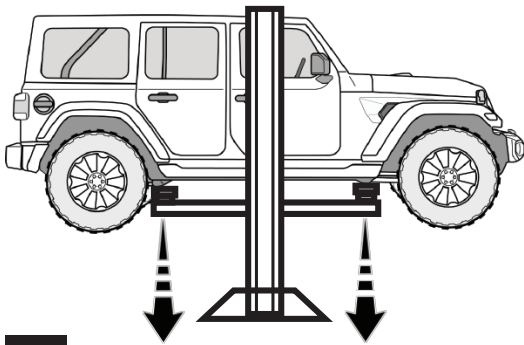


38

TORQUE TO 130 FT-LBS

REFER TO INSTRUCTIONS #999311 AND #999312 FOR PROPER INSTALLATION OF TRACK BAR BRACKETS

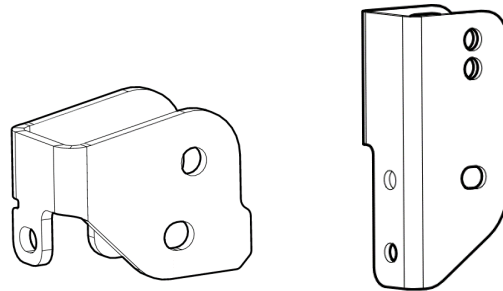


NOTE: IF INSTALLING TRACK BAR, REFER TO INSTRUCTIONS #999322

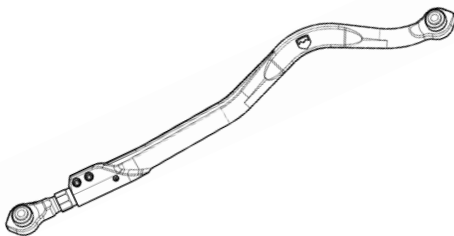


39

REINSTALL TRACK BARS AND TORQUE TO THE FOLLOWING SPECS

TORQUE REAR
BOLT 21mm
74 Ft Lbs + 60°

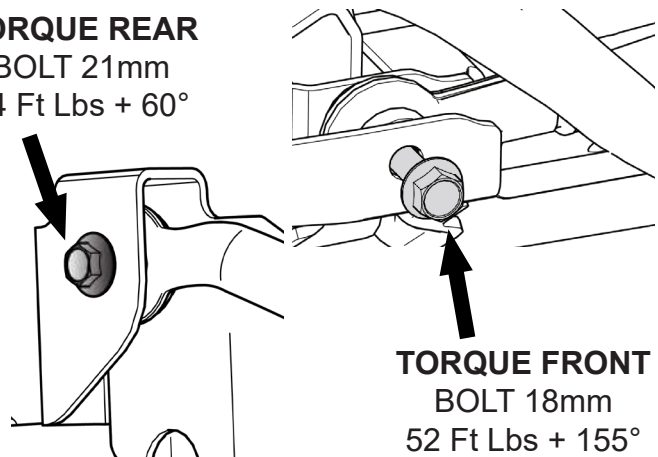

TORQUE FRONT
BOLT 18mm
52 Ft Lbs + 155°

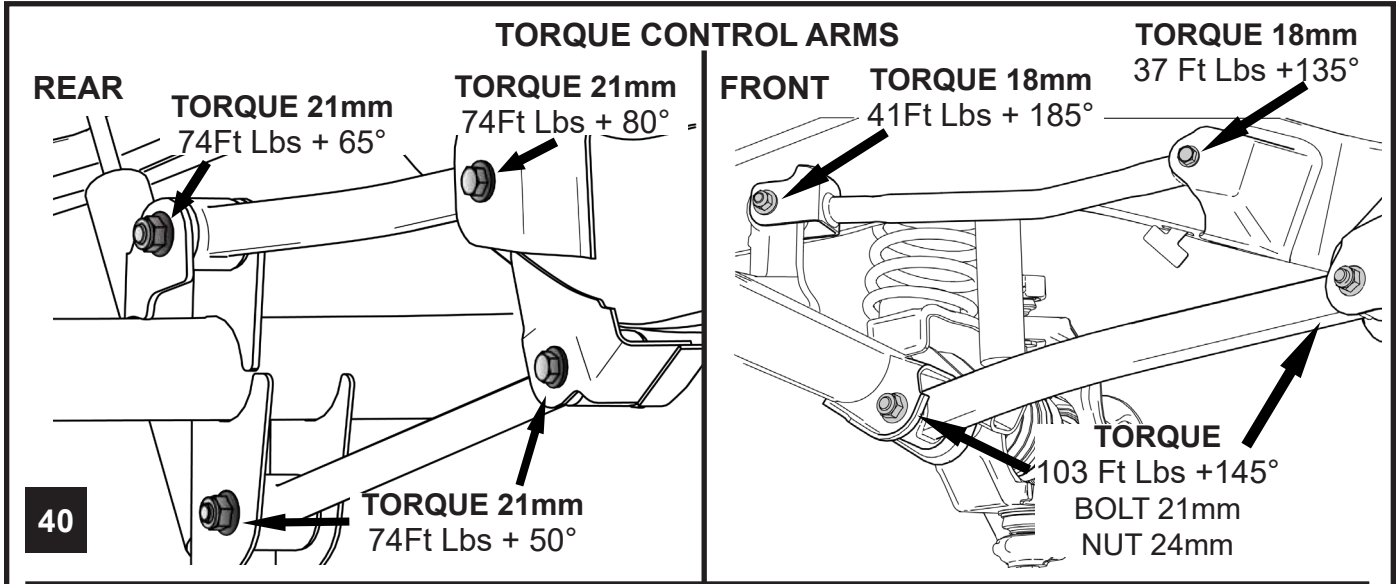

JL Tire Clearance Guide (FACTORY FENDERS)

By limiting suspension up travel, TeraFlex Bump Stops allow the use of larger tires while keeping the factory fenders.

JL Rubicon models feature high-clearance fenders that allow for more up travel, while the lower-clearance fenders on JL Sport and Sahara restricts tire size due to fender rubbing.

In order to address these fender differences, TeraFlex designed a proprietary modular bump stop system, which can be adapted to fit several different lift height and tire size configurations.


In addition to the main 2" bump stop spacers, this system includes multiple 0.5" interlocking spacers that can be added to fine tune bump stop height to limit suspension up travel.

JL RUBICON


JL Rubicon with Factory Fenders:

See Notes: Not all Tires Measure the Same

- 33" - No Bump Stops
- 35" - 2" Front & 2" Rear Bump Stops

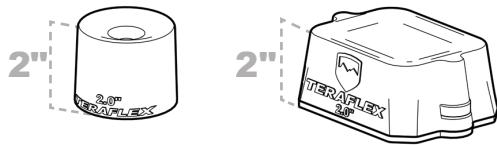

- 37" - 2.5" Front & 3" Rear Bump Stops

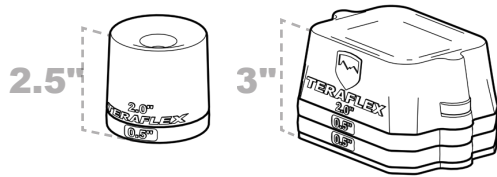


JL SPORT/SAHARA




JL Sport/Sahara with Factory Fenders:

See Notes: Not all Tires Measure the Same

- 33" - No Bump Stops
- 35" - 3" Front & 2.5" Rear Bump Stops

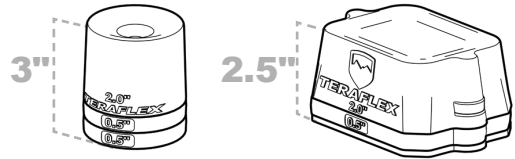

- 37" - 3.5" Front & 4" Rear Bump Stops

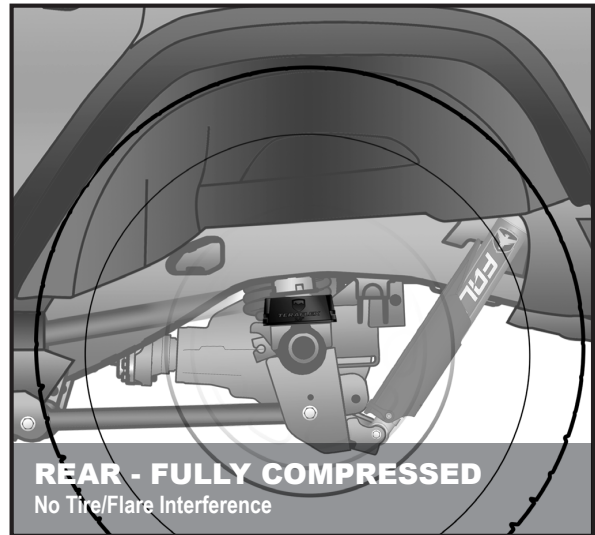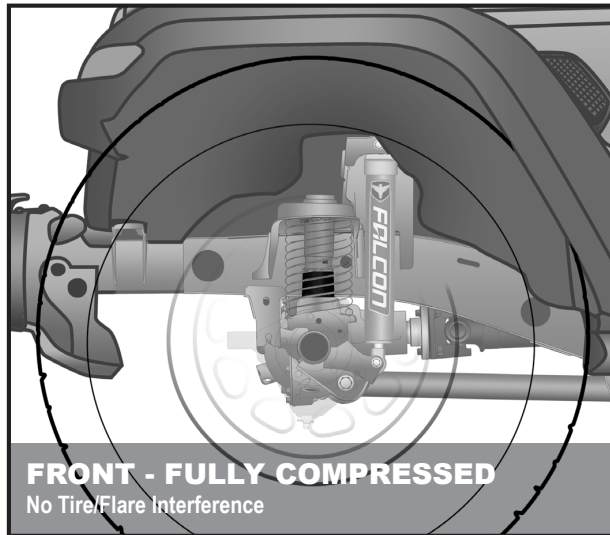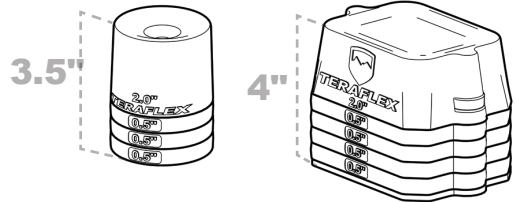


JL/JLU Strike Pad Shim (Front & Rear) 1959300

2-4 Inch Shock Options

JL Falcon Adjustable PiggyBack Shocks

- 4 Door Series 3.3, 11-01-33-400-200-3
- 2 Door Series 3.3, 10-01-33-400-200-3


- *Fast Adjust Knob
- *High Flow Oil Channel
- *Offset Sleeve Design
- *PiggyBack Reservoir

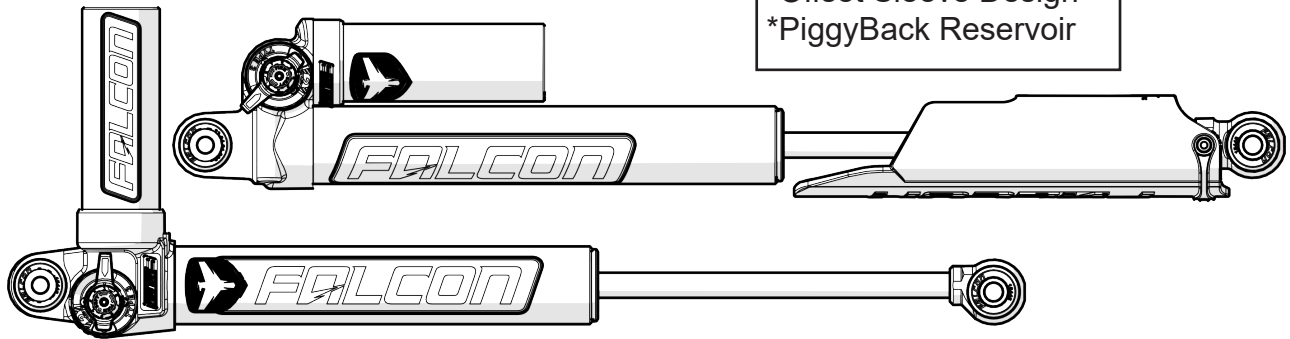

JL Falcon PiggyBack Shocks

- 4 Door Series 3.1, 11-01-31-400-200-3
- 2 Door Series 3.1, 10-01-31-400-200-3

- *Series 3.3 Upgradable
- *High Flow Oil Channel
- *Offset Sleeve Design
- *PiggyBack Reservoir

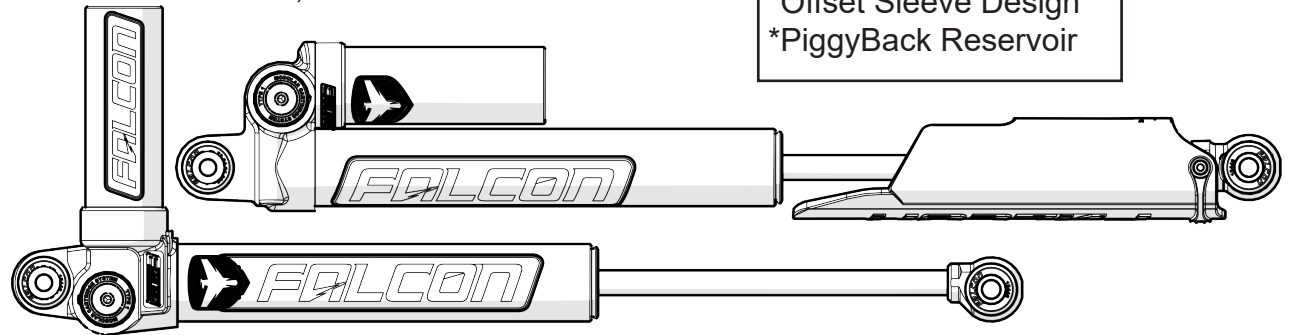

TERAFLEX

PRODUCT INFORMATION

MAINTENANCE INFORMATION:

It is the buyer's responsibility to have all suspension, drivetrain, steering, and other components checked for proper tightness and torque after the first 100 miles and every 3000 miles after that.

NOTICE TO INSTALLER:

The enclosed "Warning to Driver" sticker must be installed in the vehicle in driver's view. This sticker is to act as a constant safety reminder when operating the vehicle. It is your responsibility as the equipment installer to install the provided sticker and to forward the product instructions to the vehicle's owner for review. If a "Warning to Driver" sticker or product installation guide were not included in the kit, FREE replacement stickers and instructions are available by request. It is the installer's duty to ensure a safe and controllable vehicle after the modifications have been performed.

WARNING:

Neither the seller nor the manufacturer will be liable for any loss, damage, or injury directly or indirectly arising from the use of or inability to determine the use of these products. Before using, the user shall determine the suitability of the products for its intended use, and the user shall assume all responsibility and risk in connection therewith.

WARNING TO DRIVER:

This vehicle has been modified to enhance off road performance and has unique handling characteristics. Use in harsh environments can cause extreme stress on the components. Vehicle should be inspected after being off road to make sure that all the components are in working order and safe to travel on the highway. All fasteners should be checked so that they are at the correct torque specifications as the vibration and stresses from off roading may cause critical fasteners to work loose. Extra care should be taken to inspect the critical components, steering, and brake systems. During each oil change components such as arms, tie rod ends, etc should be greased and checked for excessive wear. Any worn components should be replaced. When returning to the pavement always set or restore tire air pressure to the factory recommendation and connect or engage any disabled sway bar mechanisms. Because of the higher center of gravity and larger tires, this vehicle handles and reacts differently than many passenger cars, both on and off road. You must drive it safely! Extreme care should be taken to prevent vehicle rollover or loss of control, which can result in serious injury or death. Avoid sudden sharp turns or abrupt maneuvers. Generally, braking performance and capabilities are decreased when significantly larger/heavier tires are used, especially when used in combination with transfer case low-range reduction kits. Take this into consideration while driving. Do not add, alter or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the TeraFlex product purchased. Mixing component brand is not recommended. TeraFlex Inc. will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products. It is ultimately the buyer's responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 3000 miles. Wheel alignment, steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.

TERAFLEX