




# JL Hardtop Handles

# 4884500

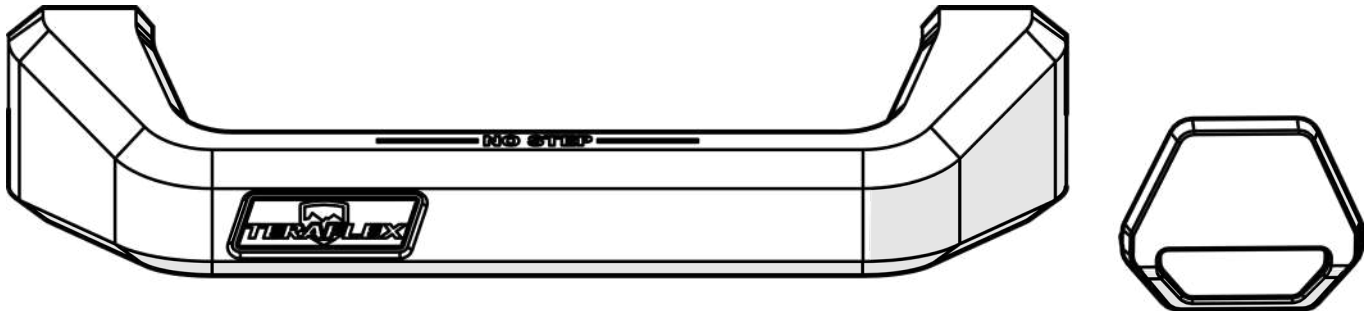

## Important Notes:

Prior to beginning this install, or any installation, read the instructions thoroughly to familiarize yourself with the required steps. Evaluate if you are experienced and capable to personally perform these modifications. A factory service manual should be used in conjunction with these installation instructions.

This product will change the highway handling characteristics of your vehicle, exercise caution. After altering the suspension it is always advisable to have an alignment done by a competent 4 wheel drive shop or by an alignment shop that is experienced with lifted 4 wheel drive vehicles.


Refer to the parts list to ensure that all necessary components and hardware has been included. If any parts are missing please contact your local TeraFlex dealer for assistance.

**When reinstalling OEM hardware, refer to the torque specs given in the Factory Service Manual.**

## Tools Needed:

- 11/32" Brad Point Drill Bit
- Tape Measure or Ruler
- General Mechanics Tools


- Torque Wrench
- Masking Tape

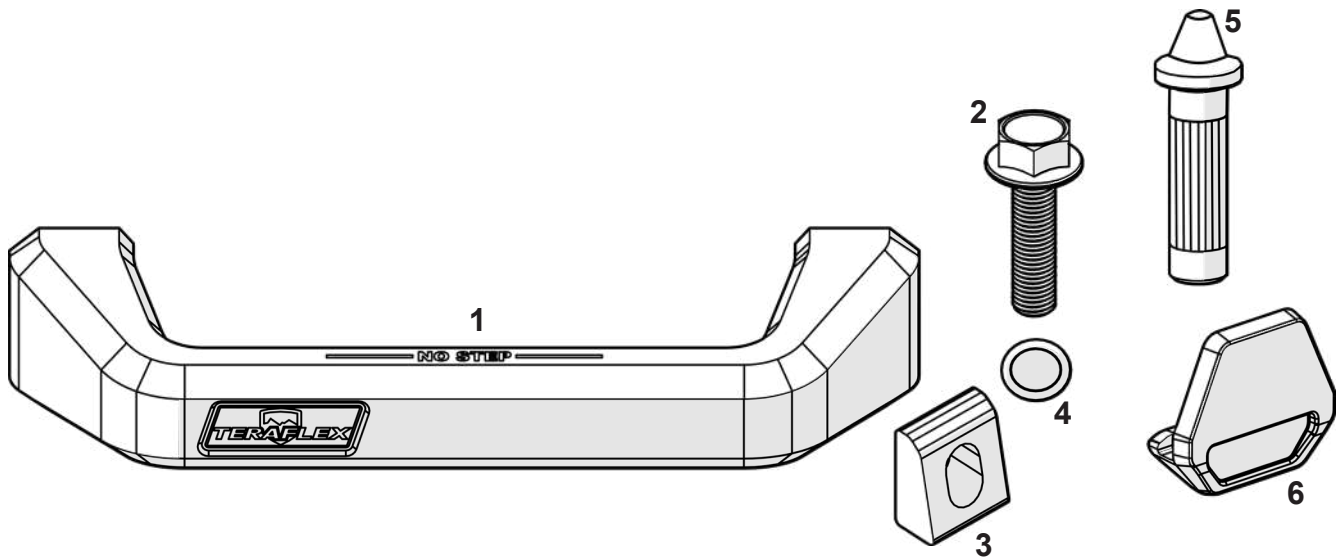

Item #	Part No.	Description	QTY
1	300-04-003	Handle, JL Roof Removal / Installation	4
2	45-02-003-016	Hex Flange Bolt, M8 x 1.25 x 30mm	8
3	300-04-004	Handle Backing Plate JL Roof Removal / Installation	8
4	16-01-07-036-1	O-Ring, .070" Width, .364" ID	8
5	242001	Turbo-Lock Blue Thread Locker	1
6	36-03-001-001	Hard Top Accessory Bumper, Jeep Wrangler JL	4


**MEASURE MULTIPLE TIMES BEFORE DRILLING!!**  
**DO NOT DRILL INTO YOUR HARDTOP UNTIL YOU ARE 100% COMFORTABLE WITH**  
**WHERE THE HOLES WILL END UP. IT IS EASIER AND CHEAPER TO TAKE EXTRA**  
**MEASUREMENTS THAN TO HAVE TO REPAIR YOUR HARDTOP.**

**APPLY MASKING TAPE TO THE CORNERS OF THE HARDTOP**

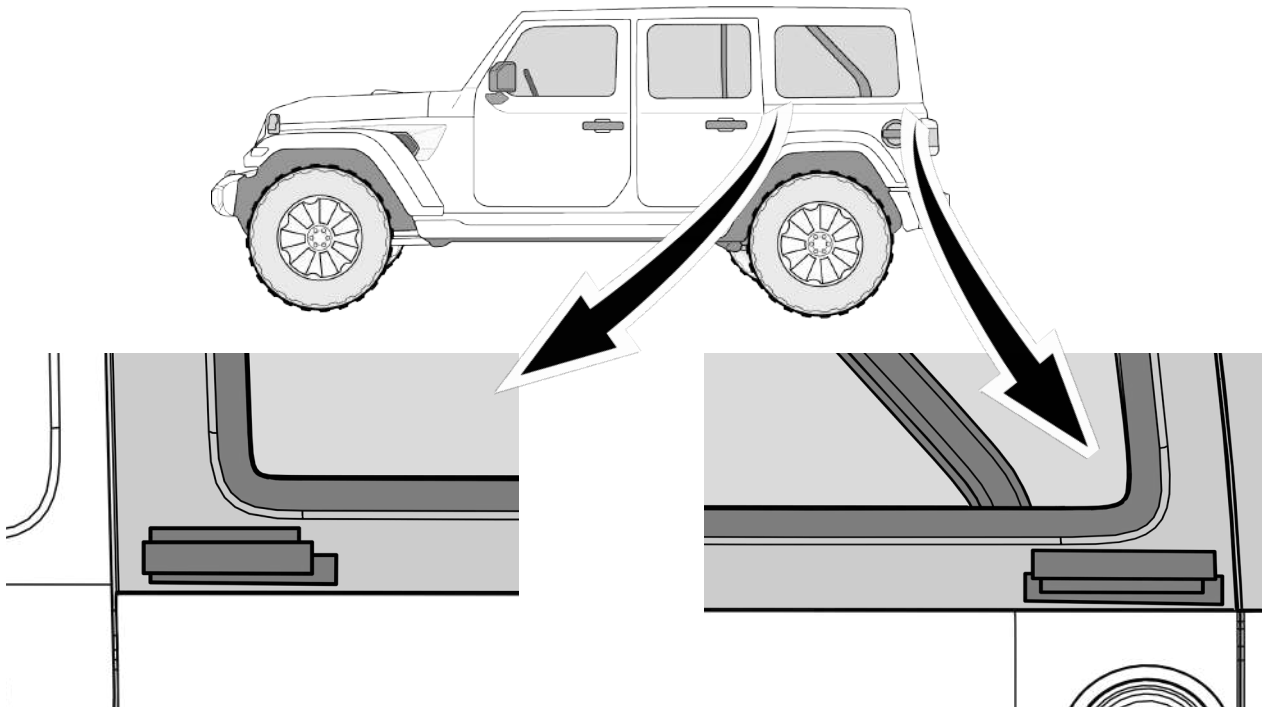

**1**

**TAPE THE TEMPLATES TO THE CORRESPONDING CORNERS OF THE HARDTOP AND DRILL AT THE MARKED LOCATIONS**

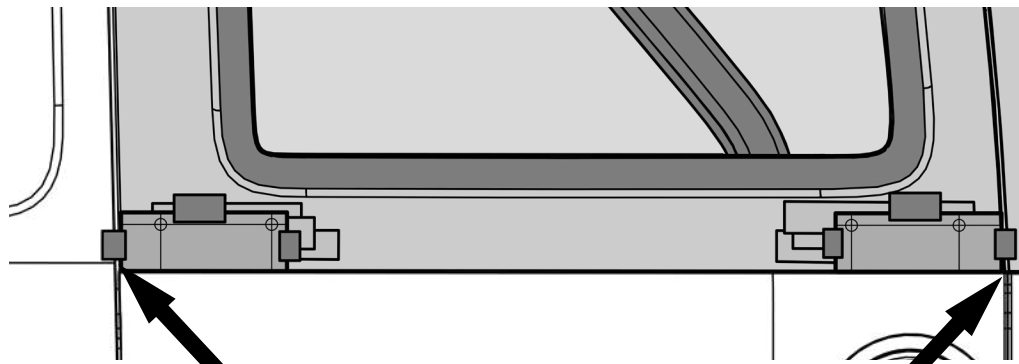

**PLACE CORNER OF  
FRONT TEMPLATE HERE**

**PLACE CORNER OF  
REAR TEMPLATE HERE**


**USE A TAPE MEASURE TO VERIFY THE POSITION OF THE HOLE MARKERS. ONCE HOLE POSITIONS HAVE BEEN VERIFIED DRILL THROUGH THE HARDTOP USING A 11/32 DRILL BIT. TAKE CARE TO KEEP THE DRILL BIT PERPENDICULAR TO THE HARDTOP.**

**TIP: WE RECOMMEND USING A BRAD POINT DRILL BIT FOR A CLEAN ACCURATE HOLE.**

**2**





### PLACE THE O-RINGS INTO GROOVES ON THE HANDLES

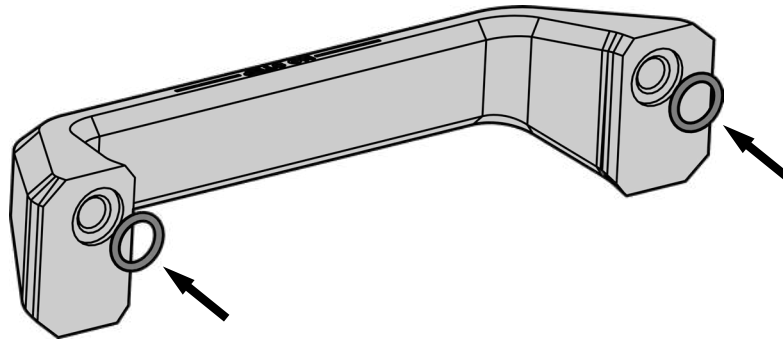


3

### INSTALL THE HANDLES USING THE PROVIDED HARDWARE

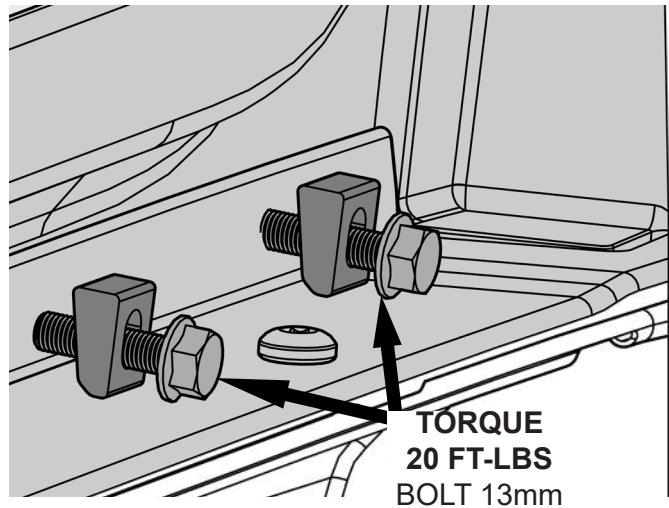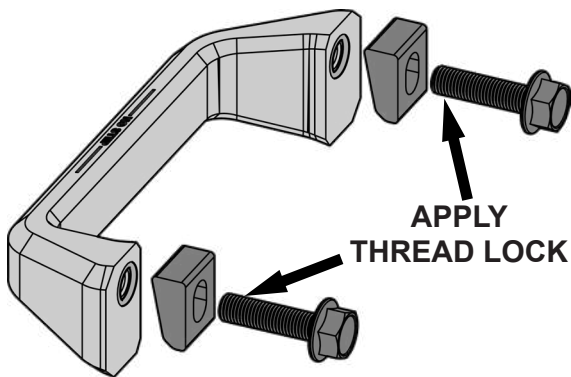

4

### INSTALL THE HARDTOP BUMPERS

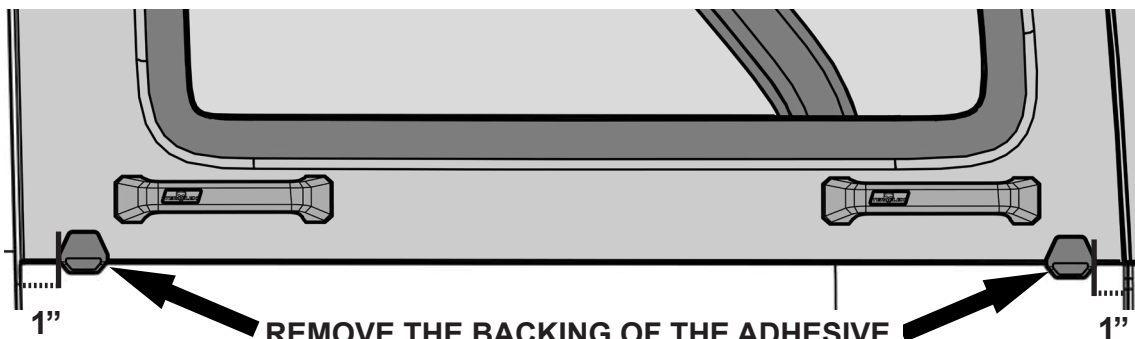

REMOVE THE BACKING OF THE ADHESIVE, HOOK THE BUMPER UNDER THE LIP, AND PRESS THE BUMPER TO THE HARDTOP

THESE BUMPERS ALLOW YOU TO PLACE THE HARDTOP ON THE GROUND WITHOUT THE RISK OF DAMAGE. PLACE THE BUMPERS ABOUT 1 INCH FROM THE OUTER EDGES.

5

# TERAFLEX

## PRODUCT INFORMATION

### MAINTENANCE INFORMATION:

It is the buyer's responsibility to have all suspension, drivetrain, steering, and other components checked for proper tightness and torque after the first 100 miles and every 3000 miles after that.

### NOTICE TO INSTALLER:

The enclosed "Warning to Driver" sticker must be installed in the vehicle in driver's view. This sticker is to act as a constant safety reminder when operating the vehicle. It is your responsibility as the equipment installer to install the provided sticker and to forward the product instructions to the vehicle's owner for review. If a "Warning to Driver" sticker or product installation guide were not included in the kit, FREE replacement stickers and instructions are available by request. It is the installer's duty to ensure a safe and controllable vehicle after the modifications have been performed.

### WARNING:

Neither the seller nor the manufacturer will be liable for any loss, damage, or injury directly or indirectly arising from the use of or inability to determine the use of these products. Before using, the user shall determine the suitability of the products for its intended use, and the user shall assume all responsibility and risk in connection therewith.

### WARNING TO DRIVER:

This vehicle has been modified to enhance off road performance and has unique handling characteristics. Use in harsh environments can cause extreme stress on the components. Vehicle should be inspected after being off road to make sure that all the components are in working order and safe to travel on the highway. All fasteners should be checked so that they are at the correct torque specifications as the vibration and stresses from off roading may cause critical fasteners to work loose. Extra care should be taken to inspect the critical components, steering, and brake systems. During each oil change components such as arms, tie rod ends, etc should be greased and checked for excessive wear. Any worn components should be replaced. When returning to the pavement always set or restore tire air pressure to the factory recommendation and connect or engage any disabled sway bar mechanisms. Because of the higher center of gravity and larger tires, this vehicle handles and reacts differently than many passenger cars, both on and off road. You must drive it safely! Extreme care should be taken to prevent vehicle rollover or loss of control, which can result in serious injury or death. Avoid sudden sharp turns or abrupt maneuvers. Generally, braking performance and capabilities are decreased when significantly larger/heavier tires are used, especially when used in combination with transfer case low-range reduction kits. Take this into consideration while driving. Do not add, alter or fabricate any factory or aftermarket parts to increase vehicle height over the intended height of the TeraFlex product purchased. Mixing component brand is not recommended. TeraFlex Inc. will not be responsible for any altered product or any improper installation or use of our products. We will be happy to answer any questions concerning the design, function, and correct use of our products. It is ultimately the buyer's responsibility to have all bolts/nuts checked for tightness after the first 100 miles and then every 3000 miles. Wheel alignment, steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.