


503 LOAD STOPS


PARTS INCLUDED









part	description	part number	qty.
Α	load stop	753-0701	4
В	knob with bolt	753-0776-02	4

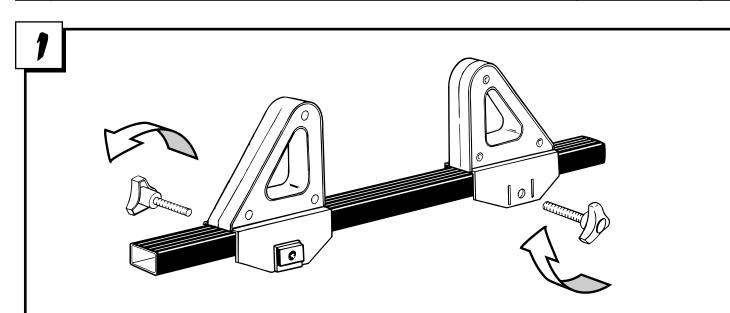

- Before you begin, please read the assembly instructions carefully. Make sure that all parts are included in the package.
- Place load stop (A) around bar, insert knob with bolt (B) through hole.
- Tighten firmly to threaded nut.

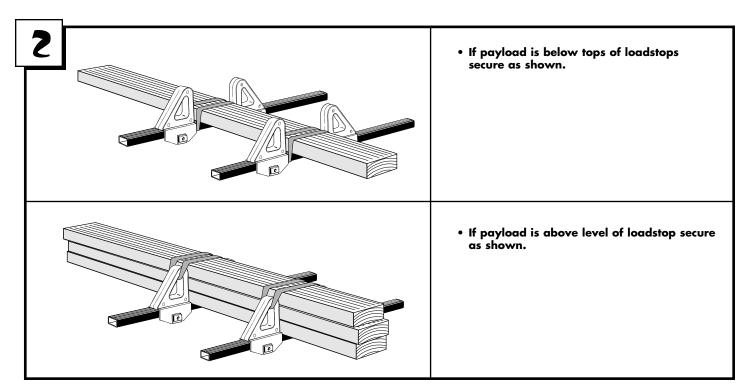

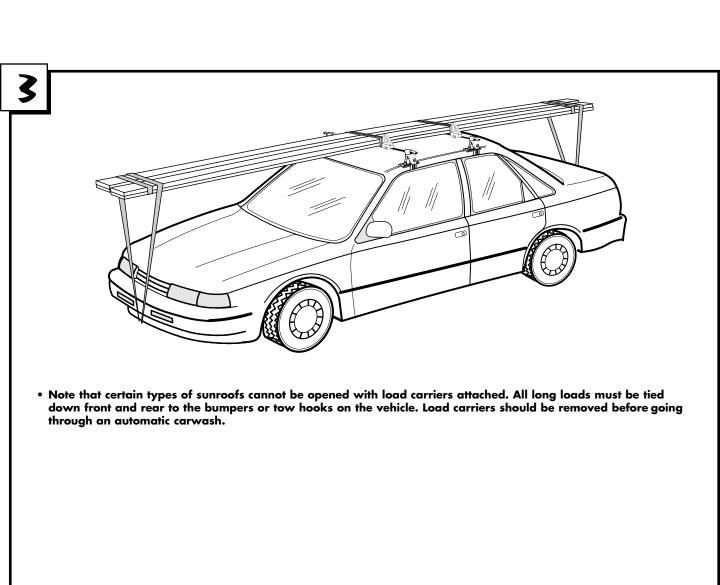

THULE RACK GUIDELINES

When using Thule Car Racks and accessories, the user must understand the precautions. The points listed below will assist you in using the rack system and will encourage safety.

Please review the instructions and warranty carefully. Assembly and installation are the end user's responsibility and beyond Thule's control. Therefore, Thule exclusively limits its warranty to the repair or replacement of a defective Thule product for up to five years from retail purchase. Damage to your vehicle, cargo, or to any person or property is excluded.

- Make sure all knobs, bolts, screws, straps, and locks are firmly attached, tightened and locked before every trip. Knobs, bolts, screws, straps, and locks must be periodically inspected for signs of wear, corrosion, and fatigue. Check your load at stops during the trip to insure continued fastening security.
- Remove your Thule rack and accessories when they are not in use and before entering automatic car washes.
- For safety to your vehicle and rack system, obey all posted speed limits and traffic cautions. Adapt your speed to the conditions of the road and the load being carried.
- Do not use Thule Car Racks and accessories for purposes other than those for which they were designed.
 Do not exceed their carrying capacity.
 Failure to follow these guidelines or the product's instructions will void the warranty.