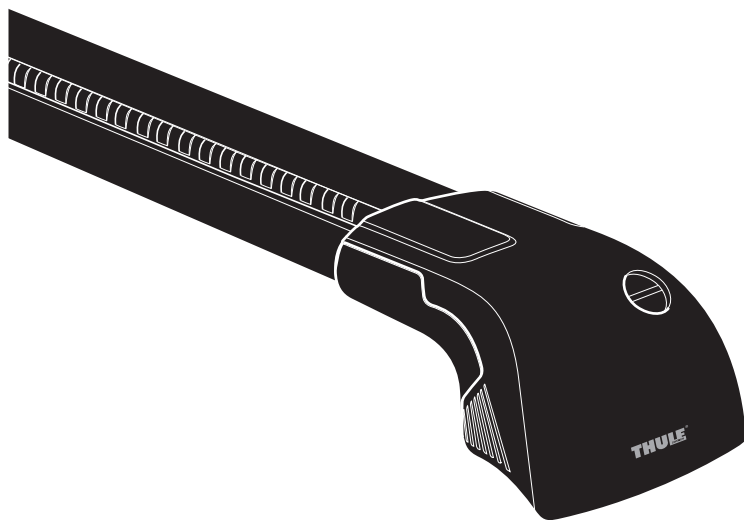


Thule AeroBlade Edge Flush 7601, 7602, 7603








> Instructions


**CITY CRASH**

Complies with ISO norm


ISO 11154-E

7601	2,3kg	5,1lbs
7602	2,4kg	5,3lbs
7603	2,5kg	5,5lbs

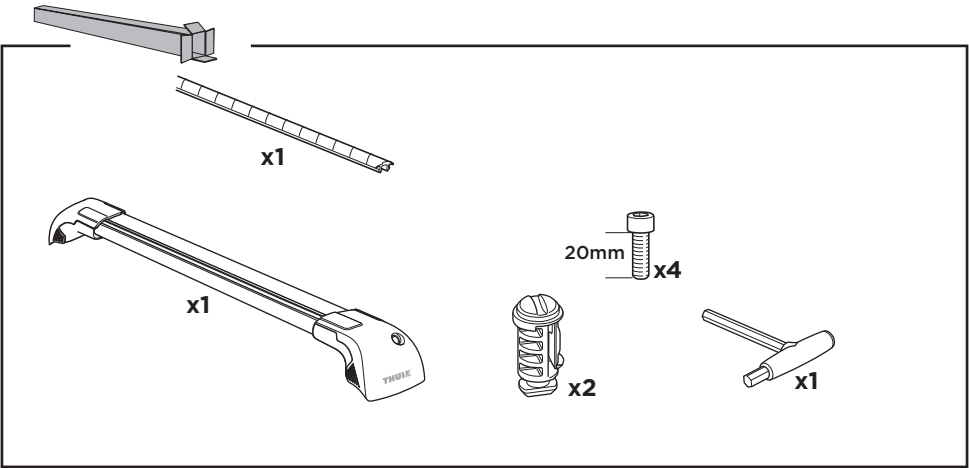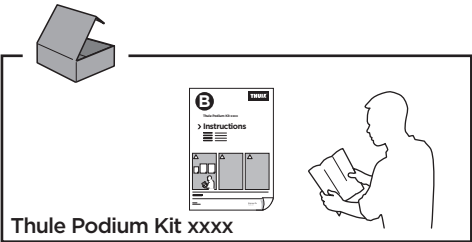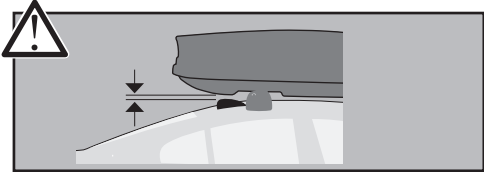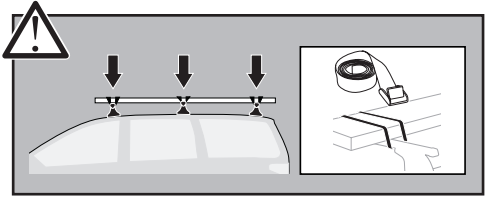
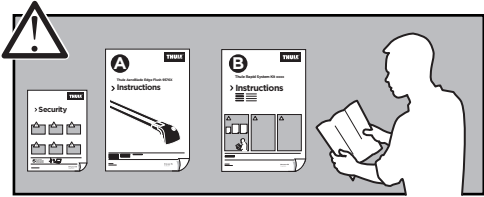
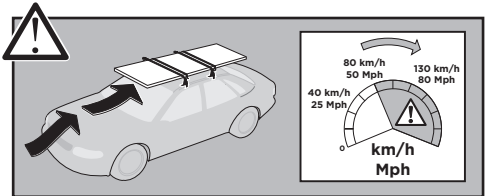


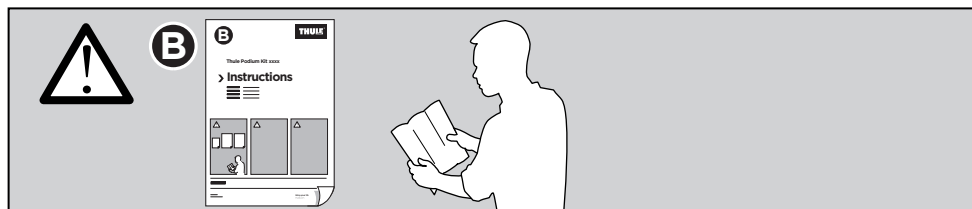


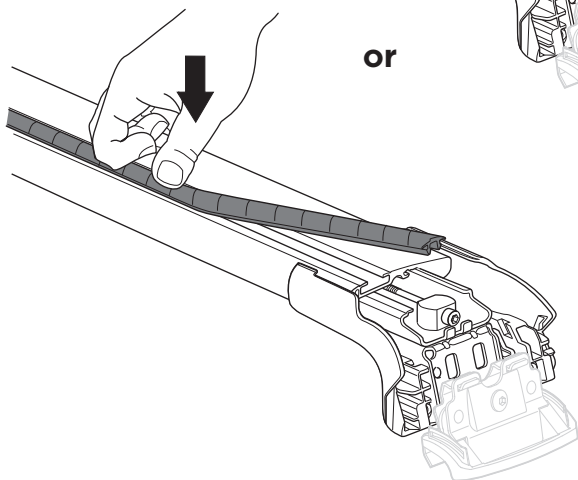
IMPORTANT! Move to KIT-manual and perform the car specific steps, before continuing with this instruction.

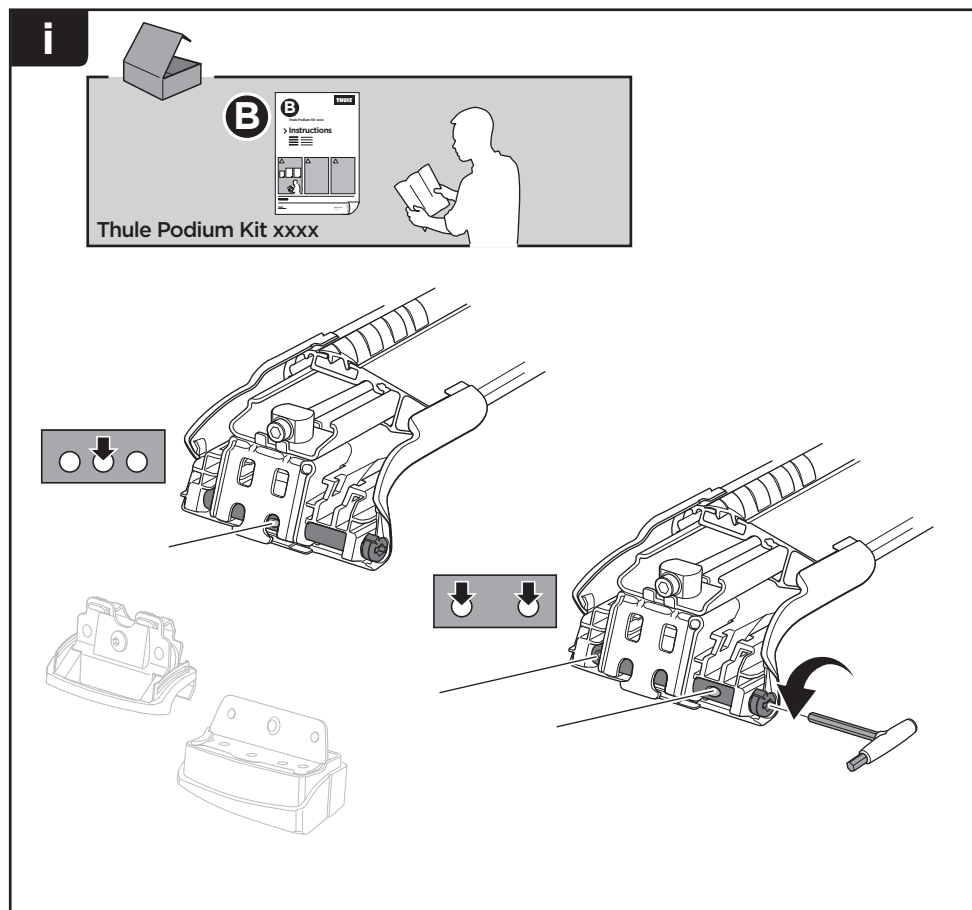





1

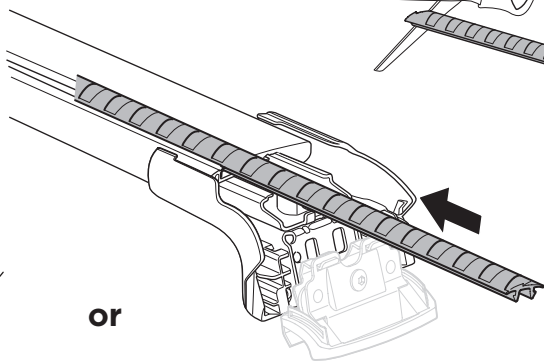

or



2

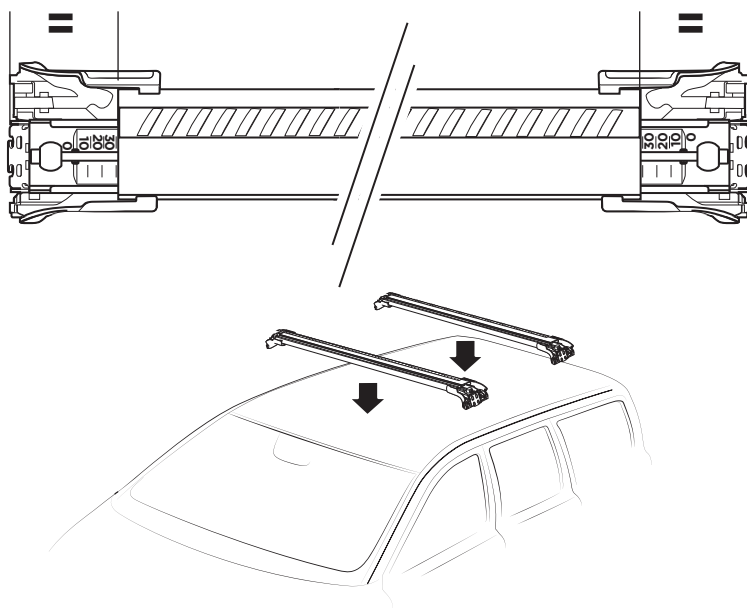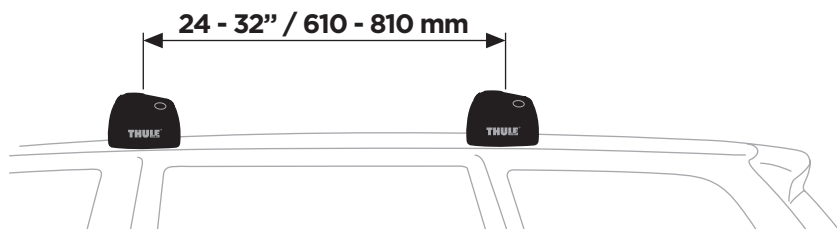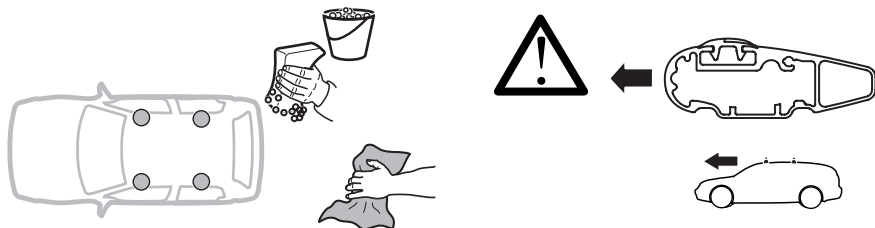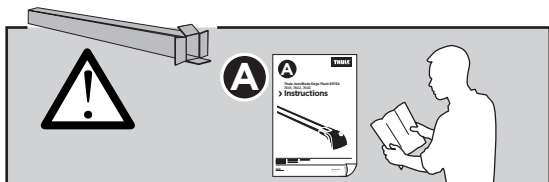

3



6 Nm / 4,4 ft-lb

2


1

B



Tighten alternately



4

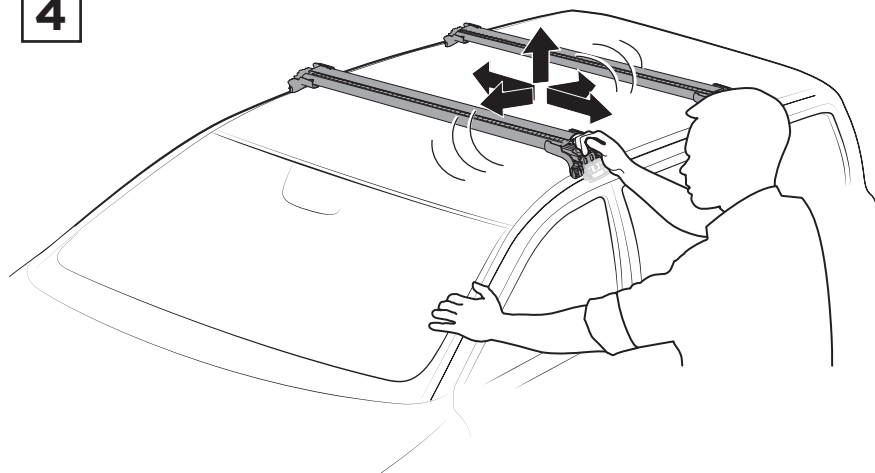

5



x2

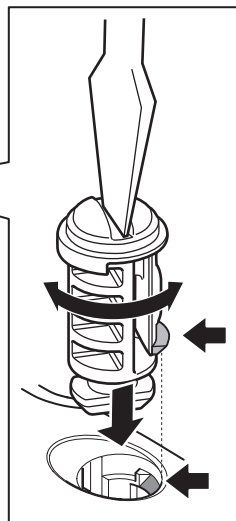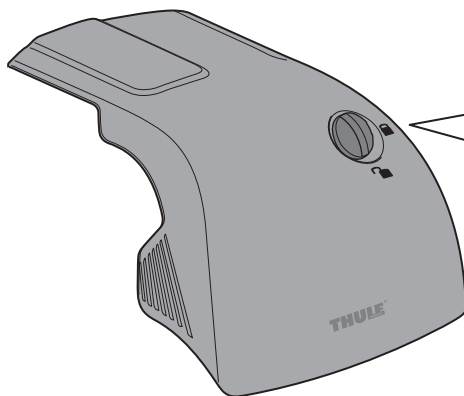


6

R




x1

L




x1

R

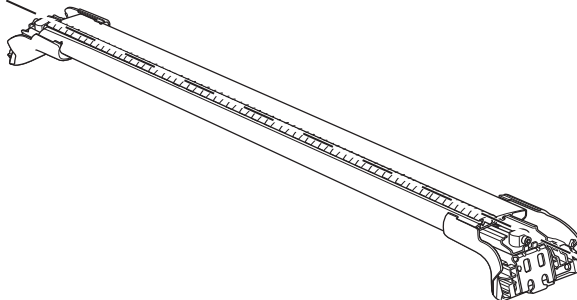


L



7

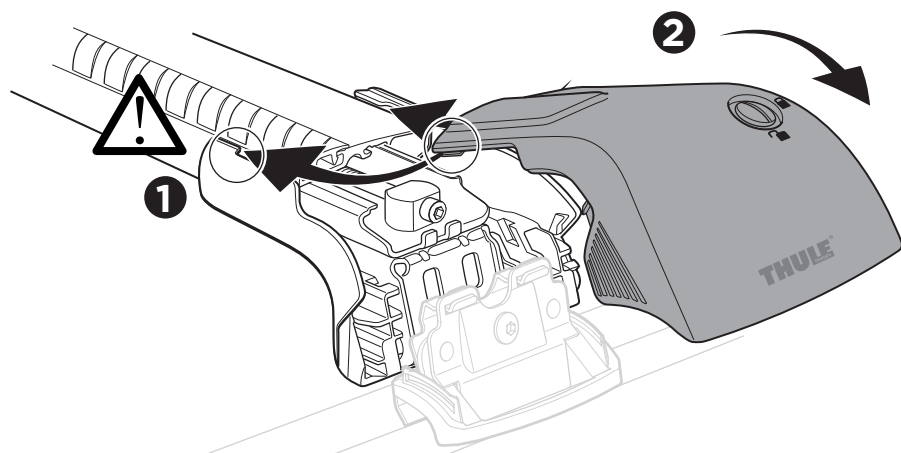


8

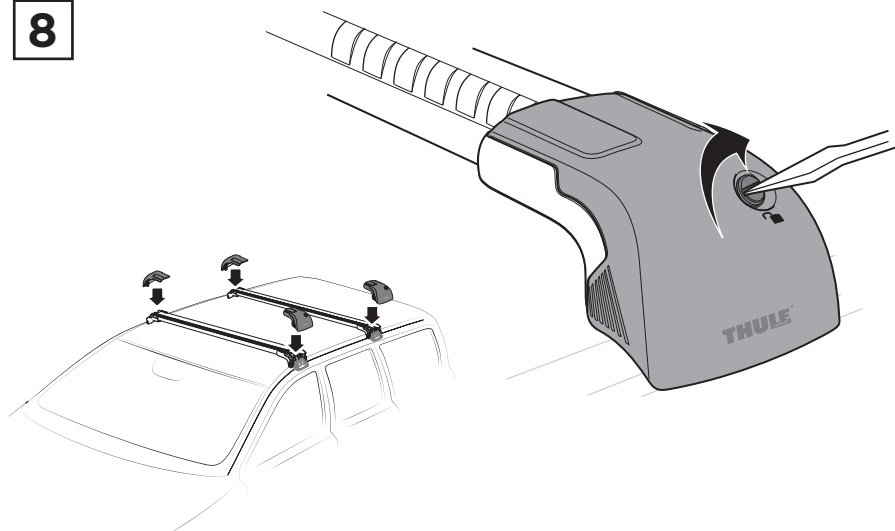

i

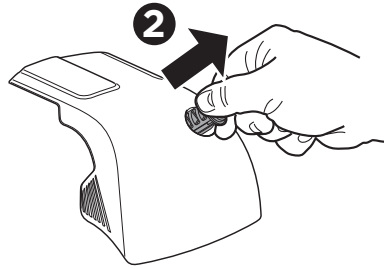


THULE
ONE
KEY
SYSTEM

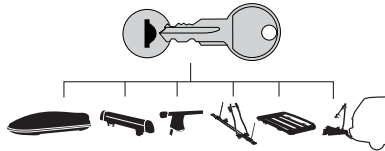


512 (x2)
544 (x4)
596 (x6)
588 (x8)




i

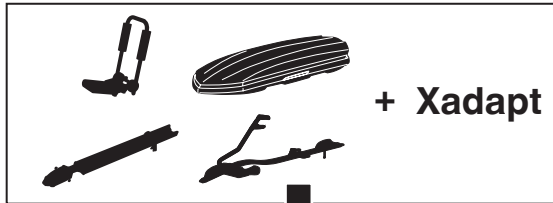


+ Xadapt

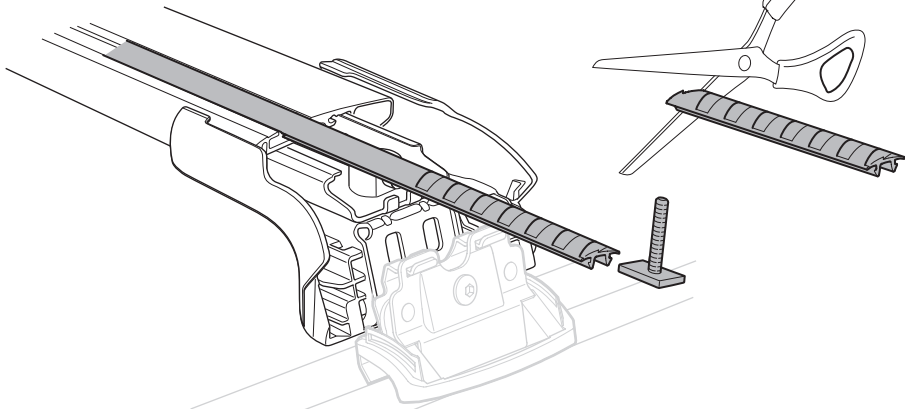

i

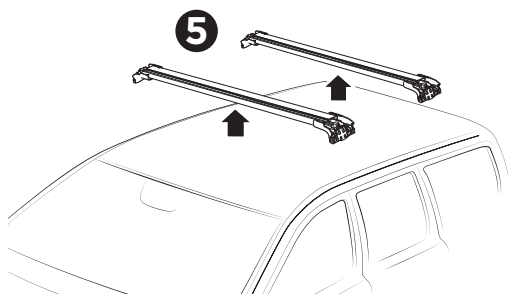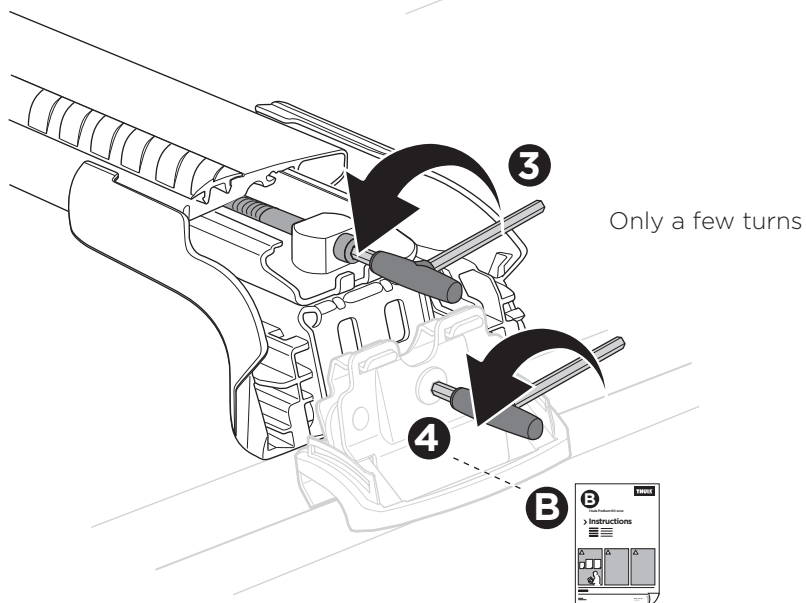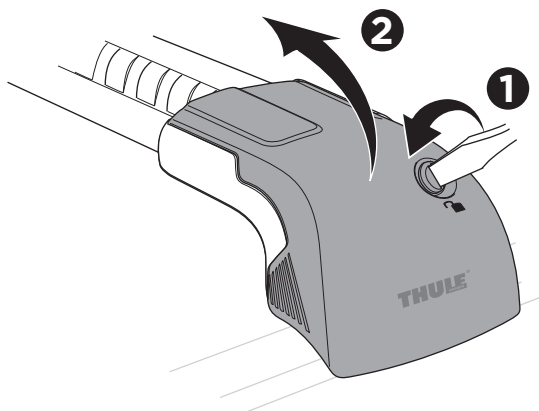

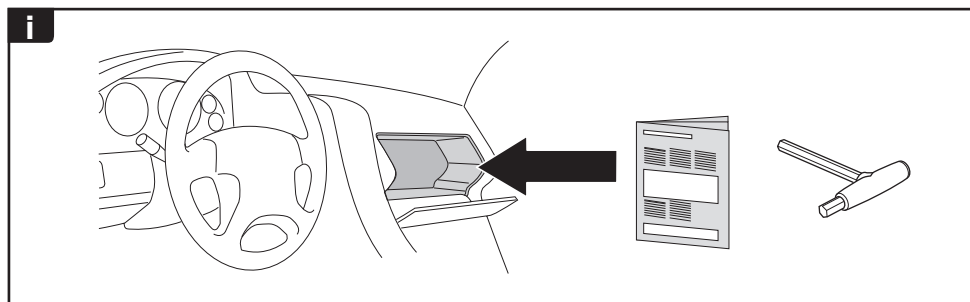

THULE SWEDEN ONE KEY SYSTEM	A diagram showing a central key with a Thule logo. Below the key, a horizontal line connects to five different Thule bike rack models: a roof rack, a bike rack, a bike rack, a bike rack, and a bike rack.	512 (x2) 544 (x4) 596 (x6) 588 (x8)
---	--	--

Check out the collection of bike racks we offer.