

THULE SWEDEN FORCE™ 623/624/628/625/626


PARTS INCLUDED

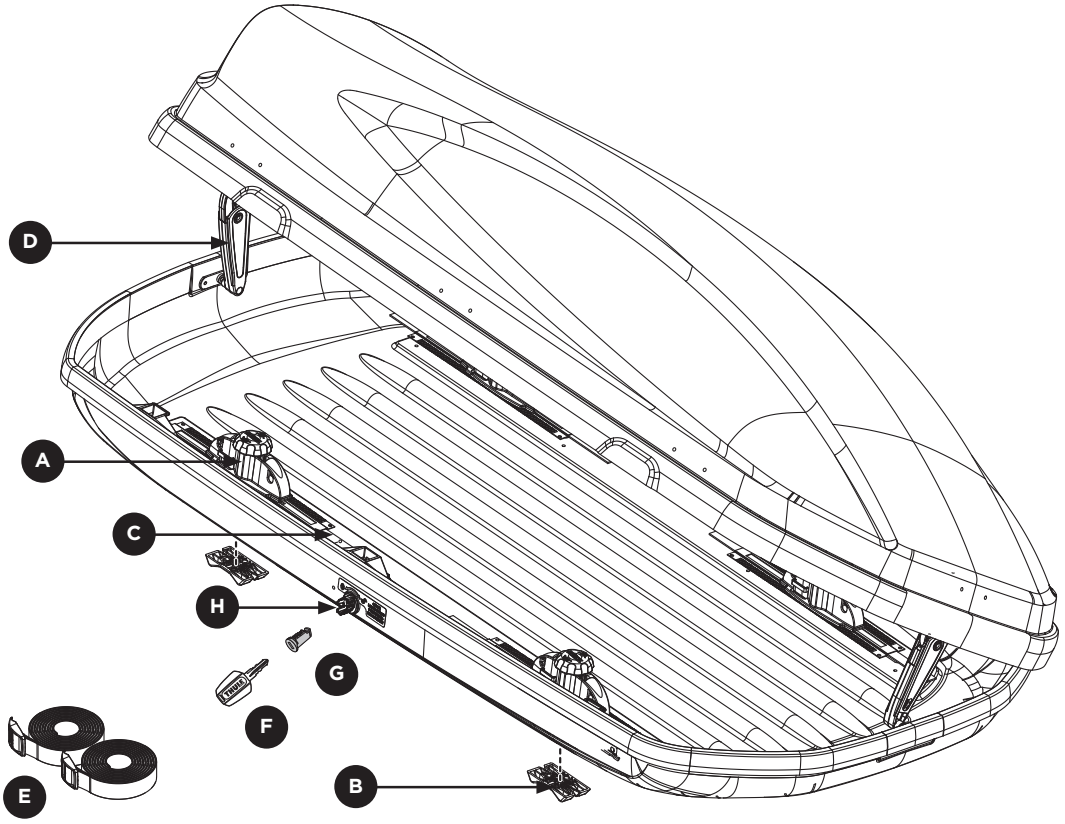


part	description	part number	qty.
A	Quick-Grip™ Mounting Hardware with screw	05738	4
B	Cradle for Quick-Grip™ /	8523387001	4
C	Slide Strip for Quick-Grip™ /	05401	4
D	Lid Lifter (623, 624, 628) /	14933	2
D	Lid Lifter (625, 626) /	14936	2
E	Tie Down Strap /	10169	2
F	Key /	—	2
G	Lock Cylinder /	—	2
H	Key Shield /	05771	2

1 UNLOCKING/LOCKING THE BOX

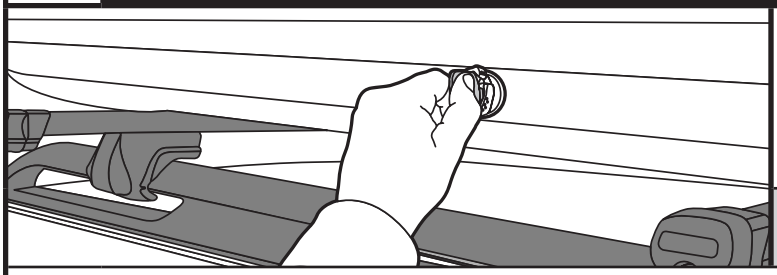




OPEN



CLOSE

Unlocking: Insert the key and turn clockwise to the unlocked position. The key can only be removed when the box lid is closed and locked.
Locking: To close, press down on the lid at the front and rear of the box. Turn the key counterclockwise to lock. Remove key.


2

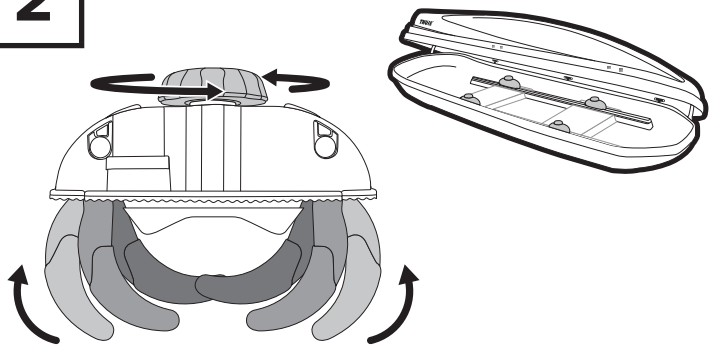

- Unpack cargo box and open.
- Turn Thule Quick-Grips™ counter clockwise until completely open.
- Close cargo box.

3

Minimum bar spread = 23 5/8" or 600mm.

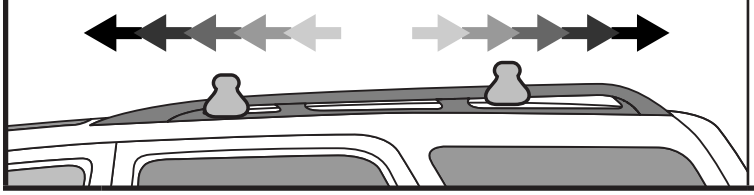

- If rack crossbars are adjustable, set to widest position which can be accommodated by vehicle and box's Quick-Grips™.

4




- With the help of another person place box on roof rack.

5



- Check rear hatch and front hood clearance.
- Check roof-mounted antenna clearance.


6

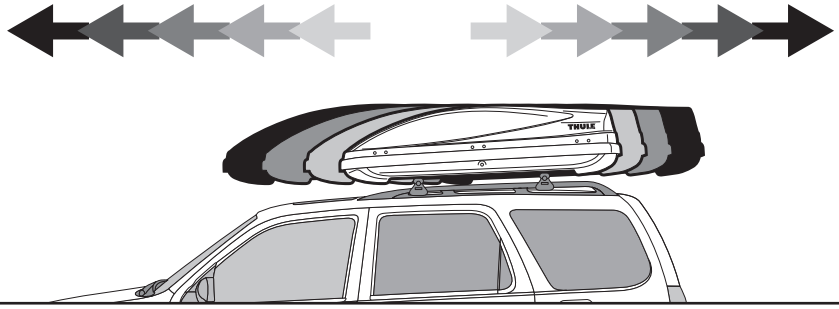

NOTE: Mount box towards the rear of the vehicle to minimize wind resistance.


- Slide box and/or Quick-Grips™ forward or backward to position box properly over crossbars, and to eliminate any hood/hatch/antenna interference.

7

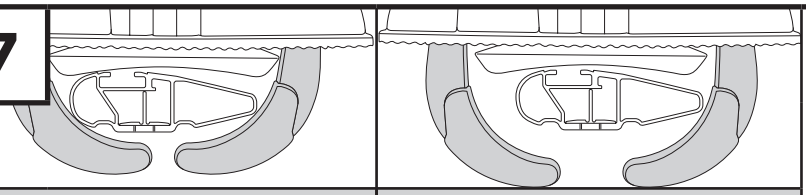


CORRECT | INCORRECT

- Center the Quick-Grips™ over the crossbars.

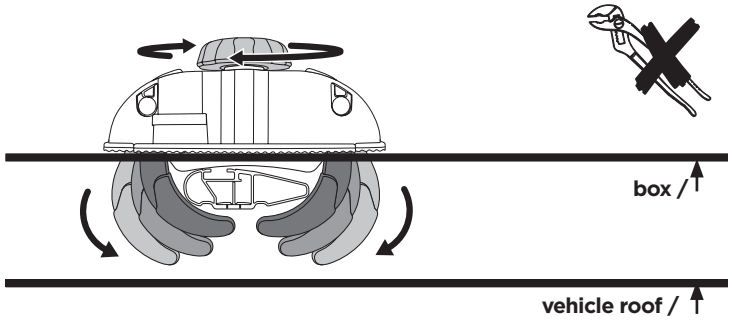


- Check to make sure all four Thule Quick-Grips™ are correctly positioned on the crossbars and tighten by turning in a clockwise direction.
- Tighten firmly!
- Check the tightness of each Quick-Grip™ once more to ensure a secure fit.

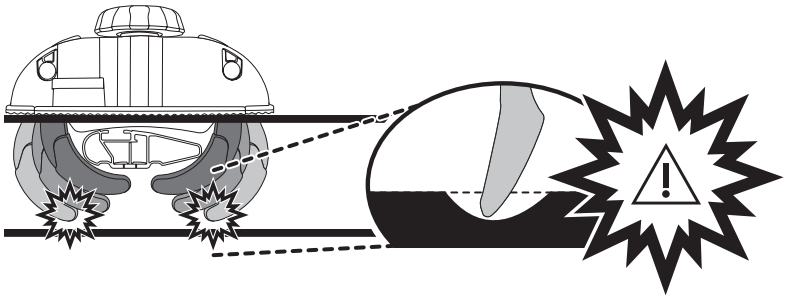

CAUTION: Avoid vehicle roof contact.

8

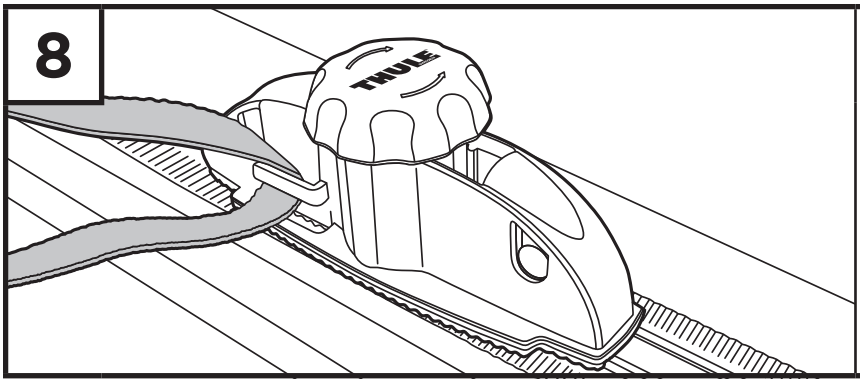


- **Secure loads to Quick-Grips™ with supplied load straps.**

9


EXCHANGING LOCK CORES

- **In order to change the existing lock core to a different lock core number, follow steps 1–9 below.**

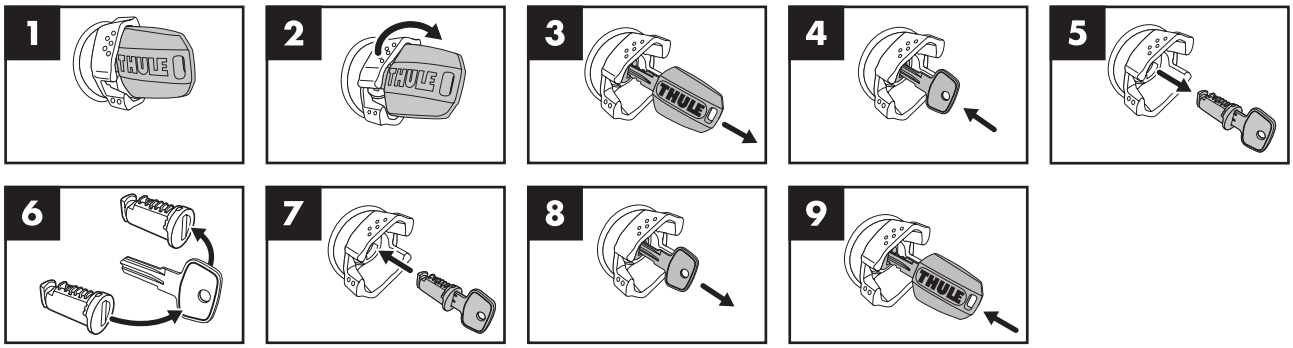


NOTE: **Key in #4 through #8 is a Master Key.**

10

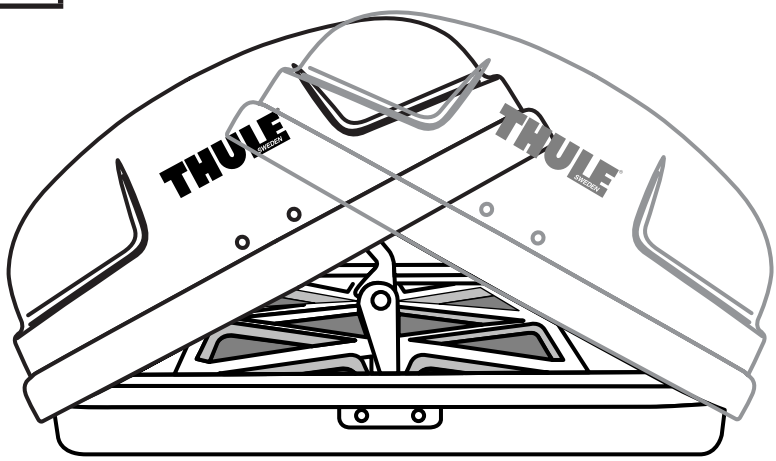

- **This box is designed with a patented dual-side opening system, allowing you to open the box from either side and providing easy access to each pair of Quick-Grips™ during installation and removal.**
- **The box should only be opened one side at a time.**
- **The lock works the same way from either side of the box.**

11

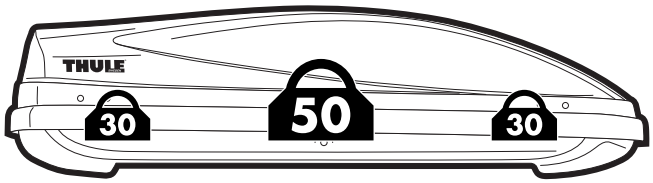

- **Make sure that loads are evenly distributed inside the cargo box. Do not exceed the maximum permitted load of 110 lbs./50kg. for the box or the maximum permitted load for the roof as recommended by the vehicle manufacturer, as well of the maximum load of the load carrier.**

12

MAINTENANCE

- **The cargo box should be carefully cleaned and maintained, particularly in the winter months.**
- **For cleaning, use only water with a mild detergent which contains no additives (such as alcohol, chlorine or ammonia) as these could damage the surface of the cargo box.**
- **The locks should be lubricated with graphite or similar dry lubricant.**
- **Box should be protected from exposure to the elements during prolonged periods of storage.**
- **Box and fittings should be inspected periodically for damage.**

13

CARGO AND USAGE WARNINGS



