



TOYO TIRES PASSENGER & LIGHT TRUCK TIRES 2018 PRODUCT CATALOG

TOYO TIRES®

PASSENGER & LIGHT TRUCK TIRES

2018 PRODUCT CATALOG



A blue-tinted photograph of a large military vehicle, possibly a tank or heavy transport, with the word 'UNRIVALED' overlaid in large white letters. The vehicle is shown from a low angle, emphasizing its size and power. It has large, treaded tires and a complex mechanical structure. The background is a bright blue sky with some clouds. The overall mood is one of strength and dominance.

UNRIVALED

LT

LIGHT TRUCK/SUV/CUV

S

SPORTS CAR/COMPETITION

P

PASSENGER CAR

W

WINTER

LIGHT TRUCK/SUV/CUV

OPEN COUNTRY M/T	13
OPEN COUNTRY R/T	17
OPEN COUNTRY A/T II	19
OPEN COUNTRY H/T	23
OPEN COUNTRY Q/T	27
PROXES ST III	31
PROXES S/T	33
CELSIUS CUV	35
OPEN COUNTRY C/T	37
M-55	39

SPORTS CAR/ COMPETITION

PROXES 1	45
PROXES R1R	47
PROXES T1 SPORT	49
PROXES T1R	51
PROXES 4 PLUS	53
PROXES R888R	59
PROXES R888	61
PROXES RR	63
PROXES RA1	65
PROXES RS1	67
PROXES TQ	69

PASSENGER CAR

VERSADO NOIR	75
VERSADO ECO	77
EXTENSA HP II	79
EXTENSA A/S	81
CELSIUS	83

WINTER

OBSERVE GSI-5	89
OBSERVE GARIT KX	93
OBSERVE G3-ICE	95
OPEN COUNTRY WLT1	99

ORIGINAL EQUIPMENT 101

TIRE SAFETY	103
CONSUMER ADVISORY	
TECHNICAL BULLETINS	

REFERENCE GUIDES

LIGHT TRUCK	109
PASSENGER CAR	112
WINTER	116



COMMITMENT



ALL OF THE LOVE WITH NONE OF THE REGRET.

When it comes to a major purchase like new tires, there's nothing people love more than a solid guarantee. That's what makes the Toyo Tires Trial Offer such a simple, powerful selling tool. If your customers don't love their Toyo Tires in the first 500 miles or 45 days they can return them to you for a full refund. The Toyo Tires Trial Offer is available on almost every Passenger Car and Light Truck tire we sell.* The Toyo Tires Trial Offer... it's just one more reason to love Toyo Tires.

*Excludes M-55, Proxes R1R, competition tires, snow tires, original equipment tires, and commercial tires.

LIGHT TRUCK / SUV / CUV

CONQUER

OPEN COUNTRY M/T	OPEN COUNTRY R/T	OPEN COUNTRY A/T II	OPEN COUNTRY H/T	OPEN COUNTRY Q/T	PROXES ST III	PROXES S/T	CELSIUS CUV
							
OFF-ROAD MAXIMUM TRACTION	ON-/OFF-ROAD RUGGED TERRAIN	ON-/OFF-ROAD ALL-TERRAIN	HIGHWAY ALL-SEASON	CUV/SUV TOURING ALL-SEASON TIRE	STREET/SPORT TRUCK ALL-SEASON	STREET/SPORT TRUCK ALL-SEASON	VARIABLE-CONDITIONS
DRY HANDLING 3.5	DRY HANDLING 4.0	DRY HANDLING 4.0	DRY HANDLING 4.0	DRY HANDLING 4.5	DRY HANDLING 5.0	DRY HANDLING 4.5	DRY HANDLING 4.0
WET HANDLING 3.5	WET HANDLING 4.0	WET HANDLING 3.5	WET HANDLING 3.5	WET HANDLING 4.5	WET HANDLING 5.0	WET HANDLING 4.0	WET HANDLING 3.5
RIDE COMFORT 3.0	RIDE COMFORT 3.5	RIDE COMFORT 3.5	RIDE COMFORT 4.5	RIDE COMFORT 5.0	RIDE COMFORT 3.5	RIDE COMFORT 3.5	RIDE COMFORT 4.5
QUIET RIDE 3.0	QUIET RIDE 3.5	QUIET RIDE 4.0	QUIET RIDE 4.5	QUIET RIDE 5.0	QUIET RIDE 4.5	QUIET RIDE 4.0	QUIET RIDE 4.0
TREAD LIFE 3.5	TREAD LIFE 4.0	TREAD LIFE 5.0	TREAD LIFE 4.5	TREAD LIFE 4.0	TREAD LIFE 3.0	TREAD LIFE 3.0	TREAD LIFE 4.0
OFF-ROAD TRACTION 5.0	OFF-ROAD TRACTION 4.5	OFF-ROAD TRACTION 4.0	OFF-ROAD TRACTION 2.5	OFF-ROAD TRACTION 2.5	OFF-ROAD TRACTION 2.0	OFF-ROAD TRACTION 1.5	OFF-ROAD TRACTION 2.0
WINTER HANDLING 3.5	WINTER HANDLING 3.5	WINTER HANDLING 4.5	WINTER HANDLING 4.0	WINTER HANDLING 4.0	WINTER HANDLING 3.0	WINTER HANDLING 2.5	WINTER HANDLING 5.0
ROLLING RESISTANCE 2.0	ROLLING RESISTANCE 2.0	ROLLING RESISTANCE 3.0	ROLLING RESISTANCE 4.0	ROLLING RESISTANCE 4.0	ROLLING RESISTANCE 3.0	ROLLING RESISTANCE 3.0	ROLLING RESISTANCE 4.5
UTQG --	UTQG --	UTQG S/T-Rated: 600 A B H-Rated: 600 A A LT Sizes: N/A	UTQG S/T-Rated: 640 A B H/V-Rated: 640 A A 235/55R18 100V: 600 A A LT Sizes: N/A	UTQG H/V-Rated: 680 A A S/T-Rated: 680 A B	UTQG 500 A A	UTQG 420 A A	UTQG H/V-Rated: 500 A A, 520 A A
MILEAGE WARRANTY --	MILEAGE WARRANTY 45,000 miles*	MILEAGE WARRANTY Up to 65,000 miles*	MILEAGE WARRANTY Up to 60,000 miles*	MILEAGE WARRANTY 65,000 miles*	MILEAGE WARRANTY 40,000 miles*	MILEAGE WARRANTY --	MILEAGE WARRANTY 60,000 miles*
VEHICLE & APPLICATION SEGMENT Full-Size Pickups Plus Sizing	VEHICLE & APPLICATION SEGMENT Full-Size Pickups Plus Sizing	VEHICLE & APPLICATION SEGMENT Full-Size SUVs Full-Size Pickups Direct OE Replacement Plus Sizing	VEHICLE & APPLICATION SEGMENT Crossovers Full-Size SUVs Full-Size Pickups Direct OE Replacement	VEHICLE & APPLICATION SEGMENT Crossovers Luxury SUVs Direct OE Replacement	VEHICLE & APPLICATION SEGMENT Crossovers Luxury SUVs Full-Size SUVs Full-Size Pickups Plus Sizing	VEHICLE & APPLICATION SEGMENT Full-Size SUVs Full-Size Pickups Plus Sizing	VEHICLE & APPLICATION SEGMENT Crossovers Luxury SUVs Direct OE Replacement
SPEED RATING P-Q	SPEED RATING Q	SPEED RATING Q-R-S-T-H	SPEED RATING S-T-H-V	SPEED RATING S-T-H-V	SPEED RATING V-W	SPEED RATING V-W	SPEED RATING H-V
WHEEL DIAMETER 15"-16"-17"-18"-20"-22"-24"	WHEEL DIAMETER 15"-16"-17"-18"-20"-22"	WHEEL DIAMETER 15"-16"-17"-18"-20"-22"	WHEEL DIAMETER 15"-16"-17"-18"-19"-20"-22"	WHEEL DIAMETER 16"-17"-18"-19"-20"-22"	WHEEL DIAMETER 17"-18"-19"-20"-22"-24"	WHEEL DIAMETER 20"-22"-24"	WHEEL DIAMETER 17"-18"-19"-20"



OPEN COUNTRY C/T



ON-/OFF-ROAD COMMERCIAL GRADE TIRE	
DRY HANDLING	4.0
WET HANDLING	3.5
RIDE COMFORT	3.0
QUIET RIDE	4.0
TREAD LIFE	5.0
OFF-ROAD TRACTION	4.0
WINTER HANDLING	5.0
ROLLING RESISTANCE	3.0

UTQG
--

MILEAGE WARRANTY
--

VEHICLE & APPLICATION SEGMENT
Full-Size Pickups
Direct OE Replacement
Plus Sizing

SPEED RATING
Q

WHEEL DIAMETER
16"-17"-18"-20"



M-55



OFF-ROAD COMMERCIAL TRACTION	
DRY HANDLING	3.5
WET HANDLING	3.5
RIDE COMFORT	2.0
QUIET RIDE	2.5
TREAD LIFE	5.0
OFF-ROAD TRACTION	5.0
WINTER HANDLING	4.5
FUEL EFFICIENCY	2.0

UTQG
--

MILEAGE WARRANTY
--

VEHICLE & APPLICATION SEGMENT
Full-Size Pickups
Direct OE Replacement

SPEED RATING
Q

WHEEL DIAMETER
15"-16"-17"-18"



DURABLE

LT

LIGHT TRUCK / SUV / CUV



OFF-ROAD MAXIMUM TRACTION TIRE

The Open Country M/T is legendary for durability, off-road performance, long tread life, and an aggressive tread pattern. It's designed to help trucks work hard on pavement, then work just as hard when roads are muddy, snowy, and rocky—or when there are no roads at all.

POPULAR FITMENTS

Chevrolet Trucks
Ford F-Series
Jeep
Nissan Trucks
Ram Series
Toyota Trucks

HIGH TURN-UP, 3-PLY POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.

OPEN COUNTRY M/T

AGGRESSIVE TREAD DESIGN WITH HOOK-SHAPED BLOCKS

- Delivers excellent off-road traction while maintaining great on-road performance.

OPEN, SCALLOPED SHOULDER BLOCKS

- Improves off-road traction.
- Enhances grip in muddy, sandy, or snowy off-road conditions.
- Ejects mud and snow through the open channels.

OVER-THE-SHOULDER TREAD

- Helps to provide traction in deep mud and snow.
- Delivers improved off-road handling in hard turns.

DEEP SIPING IN THE TREAD BLOCKS

- Helps maintain grip on wet surfaces.



TOYO TIRES®

LT

LIGHT TRUCK / SUV / CUV



LT

LIGHT TRUCK / SUV / CUV

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15		31X10.50R15LT	109Q	C	BSW	360490	7.0-(8.5)-9.0	57	19.1	31.1	10.7	2270	-	50	667
		33X10.50R15LT	114P	C	BSW	360470	7.0-(8.5)-9.0	64	19.1	32.8	10.9	2600	-	50	632
		33x12.50R15LT	108P	C	BSW	360100	8.0-(10.0)-11.0	73	21.0	33.0	12.8	2205	-	35	628
		33X13.50R15LT	109Q	C	BSW	360290	8.5-(11.0)	76	21.0	33.1	13.9	2270	-	35	628
		35X13.50R15LT	114Q	C	BSW	361000	8.50-(11.0)	82	21.0	34.8	14.4	2600	-	35	596
		37X14.50R15LT	120Q	C	BSW	360260	10.0-(12.0)	103	21.0	36.7	15.6	3080	-	35	566
16		LT235/85R16	120/116P	E	BSW	360440	6.0-(6.5)-7.5	54	18.4	32.0	9.4	3042	2778	80	648
		LT245/75R16	120/116P	E	BSW	360450	6.5-(7.0)-8.0	52	18.4	30.7	9.9	3042	2778	80	674
		LT255/85R16 (33X10.00R16)	123/120P	E	BSW	360460	6.5-(7.0)-8.0	61	18.9	33.5	10.2	3415	3085	80	619
		LT265/75R16	123P	E	BSW	360320	7.0-(7.5)-8.0	61	18.9	31.8	10.8	3415	-	80	651
		LT285/75R16 (33X11.50R16)	126P	E	BSW	360280	7.5-(8.0)-9.0	67	19.1	33.0	11.6	3740	-	80	628
		LT305/70R16 (33.0X12.00R16)	124P	E	BSW	360110	8.0-(9.0)-9.5	70	20.0	33.0	12.2	3525	-	65	628
		LT315/75R16 (35X12.50R16)	127Q	E	BSW	360230	8.0-(8.5)-10.0	81	21.0	34.9	12.9	3860	-	65	595
		LT385/70R16 (38X14.50R16)	130Q	D	BSW	360480	10.0-(11.0)-12.0	102	21.0	37.7	15.6	4190	-	50	550
		LT255/75R17	111/108Q	C	BSW	360790	6.5-(7.0)-8.5	57	18.3	32.3	10.0	2405	2205	50	643
		LT265/70R17	121P	E	BSW	360130	7.0-(8.0)-8.5	59	18.9	32.0	10.8	3195	-	80	648
17		LT285/70R17	121/118P	E	BSW	360650	7.5-(8.5)-9.0	64	18.9	33.0	11.5	3195	2910	80	630
		LT285/75R17 (34X11.50R17)	121P	E	BSW	360430	7.5-(8.0)-9.5	69	19.1	34.1	11.6	3195	-	80	608
		LT295/70R17 (33X11.50R17)	128P	E	BSW	360360	7.5-(8.5)-10.0	68	19.4	33.5	12.0	3970	-	80	619
		LT315/70R17	121/118Q	E	BSW	360780	8.0-(9.5)-11.0	78	20.2	34.6	12.7	3195	2910	65	600
		33X12.50R17LT	120Q	E	BSW	360760	8.5-(10.0)-11.0	71	21.0	32.8	12.5	3085	-	65	634
		35X12.50R17LT	125Q	E	BSW	360310	8.5-(10.0)-11.0	78	21.0	34.8	13.2	3640	-	65	596
		37X12.50R17LT	124Q	D	BSW	360770	8.5-(10.0)-11.0	84	21.0	36.8	12.5	3525	-	50	565
		37X13.50R17LT	131Q	E	BSW	360270	8.5-(11.0)	94	21.0	37.0	14.6	4300	-	65	560
		40X13.50R17LT	121Q	C	BSW	361010	8.5-(11.0)	104	21.0	39.7	14.4	3195	-	35	522
		LT275/65R18	123/120P	E	BSW	360620	7.5-(8.0)-9.0	63	18.9	32.3	11.0	3415	3085	80	643
18		LT275/70R18 (33X11.00R18)	125P	E	BSW	360120	7.0-(8.0)-8.5	65	19.1	33.6	11.0	3640	-	80	617
		LT285/70R18 (34X11.50R18)	127/124Q	E	BSW	360590	7.5-(8.5)-9.5	70	18.9	34.1	11.4	3860	3525	80	609
		LT285/75R18 (35X11.5R18)	129P	E	BSW	360420	7.5-(8.0)-9.5	72	19.1	35.1	11.6	4080	-	80	591
		LT295/70R18	129/126P	E	BSW	360640	7.5-(8.5)-10.0	72	19.4	34.5	11.8	4080	3750	80	602
		LT315/70R18 (36X13.00R18)	127/124Q	E	BSW	360560	8.0-(9.5)-11.0	81	20.7	35.7	13.0	3860	3525	65	581
		33X12.50R18LT	118Q	E	BSW	360340	8.5-(10.0)-11.0	74	21.0	33.0	12.7	2910	-	65	630
		33X12.50R18LT	122Q	F	BSW	360810	8.5-(10.0)-11.0	74	21.0	32.8	12.5	3305	-	80	634
		35X12.50R18LT	123Q	E	BSW	360090	8.5-(10.0)-11.0	81	21.0	35.0	13.2	3415	-	65	593
		35X12.50R18LT	128Q	F	BSW	360820	8.5-(10.0)-11.0	81	21.0	34.8	12.5	3970	-	80	598
		37X13.50R18LT	124Q	D	BSW	360300	8.5-(11.0)	90	21.0	37.0	14.2	3525	-	50	560
		38x13.50R18LT	126Q	D	BSW	360380	8.50-(11.0)	92	21.0	37.7	14.3	3750	-	50	550
		38X15.50R18LT	128Q	D	BSW	360180	11.0-(12.0)-13.0	103	21.0	37.7	15.9	3970	-	50	550
		LT275/55R20	115/112P	D	BSW	360670	7.5-(8.5)-9.5	64	19.1	32.1	11.2	2680	2470	65	647
		LT275/65R20 (34X11.00R20)	126P	E	BSW	360410	7.5-(8.0)-9.5	67	19.1	34.5	11.0	3750	-	80	601
20		LT285/60R20	125/122Q	E	BSW	361040	8.0-(8.5)-10.0	69	18.9	33.5	11.5	3640	3305	80	621
		LT295/55R20	123/120P	E	BSW	360610	8.0-(9.5)-10.0	68	19.4	33.0	12.2	3415	3085	80	630
		LT295/60R20	126/123P	E	BSW	360660	8.0-(8.5)-10.0	75	19.4	34.2	11.8	3750	3415	80	608

LT

LIGHT TRUCK / SUV / CUV

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
20		LT295/65R20	129/126P	E	BSW	360630	8.0-(8.5)-10.0	72	19.4	35.4	11.8	4080	3750	80	588
		LT305/55R20	125/122Q	F	BSW	360870	8.5-(9.5)-11.0	70	19.5	33.5	12.4	3640	3305	80	621
		LT315/60R20 (35X12.50R20)	125Q	E	BSW	360510	8.5-(9.5)-11.0	78	20.7	35.0	12.6	3640	3305	65	593
		33X12.50R20LT	114Q	E	BSW	360330	8.5-(10.0)-11.0	73	21.0	33.0	12.6	2600	-	65	630
		33X12.50R20LT	119Q	F	BSW	360830	8.5-(10.0)-11.0	73	21.0	32.8	12.5	3000	-	80	634
		35X12.50R20LT	121Q	E	BSW	360240	8.5-(10.0)-11.0	79	21.0	35.0	13.0	3195	-	65	592
		35X12.50R20LT	125Q	F	BSW	360800	8.5-(10.0)-11.0	79	21.0	34.8	12.5	3640	-	80	598
		35X13.50R20LT	126Q	F	BSW	360860	9.5-(11.0)-12.0	78	21.0	34.8	13.6	3750	-	80	598
		37X12.50R20LT	126Q	E	BSW	360750	8.5-(10.0)-11.0	85	21.0	36.8	12.5	3750	-	65	565
		37X13.50R20LT	127Q	E	BSW	360220	8.5-(11.0)	92	21.0	37.0	14.0	3860	-	65	560
		38X13.50R20LT	124Q	D	BSW	360390	8.5-(11.0)	95	21.0	37.7	14.3	3525	-	50	550
		38X15.50R20LT	125Q	D	BSW	360190	11.0-(12.0)-13.0	101	21.0	37.7	15.9	3640	-	50	550
		40X15.50R20LT	130Q	D	BSW	360370	11.0-(12.0)-13.0	109	21.0	39.7	15.9	4190	-	50	522
		LT325/50R22	122Q	E	BSW	360880	9.0-(10.0)-12.0	78	20.2	35.1	13.2	3305	-	65	592
22		33X12.50R22LT	109Q	E	BSW	360520	8.5-(10.0)-11.0	65	18.9	33.0	12.4	2270	-	65	629
		33X12.50R22LT	114Q	F	BSW	360840	8.5-(10.0)-11.0	65	18.9	32.8	12.5	2600	-	80	634
		35X12.50R22LT	117Q	E	BSW	360540	8.5-(10.0)-11.0	73	21.0	35.0	12.8	2835	-	65	593
		35X12.50R22LT	121Q	F	BSW	360850	8.5-(10.0)-11.0	72	21.0	34.8	12.5	3195	-	80	598
		37X12.50R22LT	127Q	F	BSW	361050	9.0-(10.0)-11.5	86	21.0	36.8	12.5	3860	-	80	565
		37X13.50R22LT	123Q	E	BSW	360210	8.5-(11.0)	84	21.0	37.0	14.0	3420	-	65	560
		40X15.50R22LT	127Q	D	BSW	360200	11.0-(12.0)-13.0	109	21.0	39.7	15.9	3860	-	50	522
24		37X13.50R24LT	120Q	E	BSW	360350	8.5-(11.0)	90	21.0	37.0	13.6	3085	-	65	561
		40X15.50R24LT	128P	E	BSW	360680	11.0-(12.0)-14.0	106	21.0	39.8	15.4	3970	-	65	522



ON-/OFF-ROAD RUGGED TERRAIN TIRE

Off-road performance meets on-road comfort with the Open Country R/T. Built rugged for any terrain, this tire offers excellent off-road traction, durable construction, and aggressive styling. Its ability to tackle dirt, sand, and rocks is inspired by the legendary Open Country M/T, while its quieter ride is a nod to our best-selling Open Country A/T II.

MILEAGE WARRANTY*
45,000 miles

POPULAR FITMENTS

Chevrolet Trucks
Ford F-Series
Jeep
Nissan Trucks
Ram Series
Toyota Trucks



HIGH TURN-UP, 3-PLY
POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.

OPTIMIZED PATTERN
ARRANGEMENT

- Reduces noise for improved driving comfort.

AGGRESSIVE SIDEWALL
DESIGNS WITH DURABLE
SIDEWALL COMPOUND

- Enhances traction and side impact protection.
- Offers customization with a distinct look on each side of the tire.

OPEN, SCALLOPED SHOULDER
BLOCKS

- Improves off-road traction.
- Enhances grip in muddy, sandy, or snowy off-road conditions.
- Ejects mud and snow through the open channels.

STONE AND MUD EJECTORS

- Forces stones and mud from grooves.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	31X10.50R15LT	109Q	C	BSW	351360	7.0-(8.5)-9.0	57	18.9	30.5	10.6	2270	-	50	681
16	LT265/75R16	123/120Q	E	BSW	350720	7.0-(7.5)-8.0	53	16.4	31.9	10.5	3415	3085	80	651
	LT285/75R16	126/123Q	E	BSW	351640	7.5-(8.0)-9.0	59	16.4	32.8	11.3	3750	3415	80	633
	LT305/70R16	124/121Q	E	BSW	351670	8.0-(9.0)-9.5	63	16.4	32.8	12.2	3525	3195	65	633
	LT315/75R16	127/124Q	E	BSW	351650	8.0-(8.5)-11.0	67	16.4	34.6	12.3	3860	3525	65	601
17	LT255/80R17	121/118Q	E	BSW	351630	6.5-(7.0)-8.5	56	16.4	33.1	10.0	3195	2910	80	628
	LT285/70R17	121/118Q	E	BSW	350160	7.5-(8.5)-9.0	60	16.4	33.0	11.5	3195	2910	80	630
	LT295/70R17	121/118Q	E	BSW	351210	7.5-(8.5)-10.0	64	16.4	33.3	11.8	3195	2910	80	624
	35X12.50R17LT	121Q	E	BSW	350210	8.5-(10.0)-11.0	74	18.9	34.8	12.5	3195	-	65	598
	37X12.50R17LT	124Q	D	BSW	350700	8.5-(10.0)-11.0	78	18.9	36.8	12.5	3525	-	50	565
	37X13.50R17LT	121Q	D	BSW	350670	8.5-(11.0)	84	18.9	36.8	13.6	3195	-	50	565
18	LT275/70R18	125/122Q	E	BSW	351220	7.0-(8.0)-8.5	61	16.4	33.2	11.0	3640	3305	80	626
	LT285/60R18	122/119Q	E	BSW	351280	8.0-(8.5)-10.0	58	16.4	31.5	11.5	3305	3000	80	660
	LT285/65R18	125/122Q	E	BSW	350260	8.0-(8.5)-10.0	59	16.4	32.8	11.5	3640	3305	80	633
	LT285/75R18	129/126Q	E	BSW	351250	7.5-(8.0)-9.5	66	16.4	34.8	11.3	4080	3750	80	596
	33X12.50R18LT	118Q	E	BSW	350220	8.5-(10.0)-11.0	65	18.9	32.8	12.5	2910	-	65	634
	35X12.50R18LT	123Q	E	BSW	350170	8.5-(10.0)-11.0	77	18.9	34.8	12.5	3415	-	65	598
	37X13.50R18LT	124Q	D	BSW	351270	8.5-(11.0)	85	18.9	36.8	13.6	3525	-	50	565
	LT275/65R20	126/123Q	E	BSW	351200	7.5-(8.0)-9.5	60	16.4	34.1	11.0	3750	3415	80	609
20	LT285/55R20	122/119Q	E	BSW	351240	8.0-(9.0)-10.0	60	16.4	32.4	11.7	3305	3000	80	642
	LT285/60R20	125/122Q	E	BSW	351690	8.0-(8.5)-10.0	62	16.4	33.5	11.5	3640	3305	80	621
	LT295/55R20	123/120Q	E	BSW	351620	8.0-(9.5)-10.0	64	16.4	32.8	12.2	3415	3085	80	634
	LT305/55R20	121/118Q	E	BSW	351230	8.5-(9.5)-11.0	67	16.4	33.2	12.4	3195	2919	65	625
	LT305/55R20	125/122Q	F	BSW	351480	8.5-(9.5)-11.0	65	16.4	33.2	12.4	3640	3305	80	625
	LT315/60R20	125/122Q	E	BSW	351660	8.5-(9.5)-11.0	72	16.4	34.9	12.7	3640	3305	65	596
	LT325/60R20	126/123Q	E	BSW	351680	9.0-(9.5)-12.0	75	16.4	35.4	13.0	3750	3415	65	588
	33X12.50R20LT	114Q	E	BSW	350180	8.5-(10.0)-11.0	69	18.9	32.8	12.5	2600	-	65	634
	35X12.50R20LT	121Q	E	BSW	350190	8.5-(10.0)-11.0	75	18.9	34.8	12.5	3195	-	65	598
	35X12.50R20LT	125Q	F	BSW	351470	8.5-(10.0)-11.0	71	18.9	34.8	12.5	3640	-	80	598
	35X13.50R20LT	121Q	E	BSW	350690	9.5-(11.0)-12.0	76	18.9	34.8	13.6	3195	-	65	598
	37X12.50R20LT	126Q	E	BSW	350230	8.5-(10.0)-11.0	81	18.9	36.8	12.5	3750	-	65	565
	37X13.50R20LT	127Q	E	BSW	350680	8.5-(11.0)	82	18.9	36.8	13.6	3860	-	65	565
	35X12.50R22LT	117Q	E	BSW	350710	8.5-(10.0)-11.0	67	18.9	34.8	12.5	2835	-	65	598
22	37X12.50R22LT	123Q	E	BSW	350730	9.0-(10.0)-11.5	77	18.9	36.8	12.5	3415	-	65	565
	37X13.50R22LT	123Q	E	BSW	351260	8.5-(11.0)	81	18.9	36.8	13.6	3415	-	65	565



Speed rated "Q" = 99mph. "D" = 8-ply rating, "E" = 10-ply rating, "F" = 12-ply rating. "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

LT

LIGHT TRUCK / SUV / CUV



ON-/OFF-ROAD ALL-TERRAIN TIRE

This versatile all-terrain tire offers excellent traction and tread life along with a blatantly aggressive tread design and quiet ride. The Open Country A/T II is backed by a treadwear warranty of up to 65,000 miles and our No Regrets® 45-day, 500-mile trial offer.

Xtreme sizes feature a deeper tread depth, and a more aggressive tread and shoulder design. See size specifications for a list of sizes, designated by "XT" under Construction.

MILEAGE WARRANTY*

P-Metric & Metric: 65,000 miles
LT: 50,000 miles

POPULAR FITMENTS

Chevrolet Trucks
Ford F-Series
Jeep
Nissan Trucks
Ram Series
Toyota Trucks

UTQG

P-Metric/Metric
S/T-Rated: 600 A B
H-Rated: 600 A A

AGGRESSIVE SIDEWALL AND OPEN TREAD BLOCK DESIGN

- Delivers tough looks and even tougher performance in dirt, mud, or snow, while maintaining a quiet ride.

OPEN COUNTRY A/T II

WEAR-RESISTANT TREAD COMPOUND

- Extends tread life and durability.

DEEP TREAD GROOVES WITH STONE-EJECTING BLOCKS

- Enhances mud and snow traction.
- Forces stones from grooves.

TIE BARS BETWEEN BLOCKS

- Stabilizes tread blocks.
- Improves dry braking.
- Reduces irregular wear.

POLYGONAL BLOCKS AND ZIGZAG SIPES

- Contributes to excellent snow performance.



LT

LIGHT TRUCK / SUV / CUV


TOYO TIRES®



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	CONSTRUCTION	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	P215/75R15	100S	SL		OWL	352380	5.5- (6.0) -7.0	26	12.5	27.7	8.5	1742	-	44	751
	P225/75R15	102S	SL		OWL	352370	(6.0) -7.5	28	12.6	28.3	8.8	1874	-	44	734
	P235/75R15	108S	XL		OWL	352400	6.0- (6.5) -8.0	34	12.7	28.9	9.3	2183	-	50	720
	LT235/75R15	104/101S	C		OWL	352680	6.0- (6.5) -7.0	34	15.6	28.9	9.3	1985	1820	50	720
	P265/75R15	112S	SL		OWL	352390	7.0- (7.5) -9.0	39	13.1	30.7	10.5	2469	-	44	677
	30X9.50R15LT	104S	C		OWL	352690	6.5- (7.5) -8.5	37	15.6	29.5	9.4	1985	-	50	704
	31X10.50R15LT	109S	C		OWL	352700	7.0- (8.5) -9.0	40	16.0	30.5	10.6	2270	-	50	681
	P215/70R16	99S	SL	BSW		352330	5.5- (6.5) -7.0	27	12.5	27.9	8.7	1709	-	44	745
16	LT215/85R16	115/112Q	E	BSW		352670	5.5- (6.0) -7.0	41	15.4	30.4	8.5	2680	2470	80	683
	P225/70R16	101T	SL	BSW		352340	6.0- (6.5) -7.5	28	12.6	28.4	9	1819	-	44	731
	P225/70R16	101T	SL	OWL		352350	6.0- (6.5) -7.5	29	12.6	28.4	9	1819	-	44	731
	P225/75R16	104S	SL	BSW		352360	(6.0) -7.5	31	12.6	29.3	8.8	1984	-	44	709
	LT225/75R16	115/112Q	E	BSW		352650	(6.0) -7.0	38	15.5	29.3	8.8	2680	2470	80	709
	P235/70R16	104T	SL	BSW		352270	6.0- (7.0) -8.0	31	12.8	29	9.4	1984	-	44	717
	P235/70R16	104T	SL	OWL		352280	6.0- (7.0) -8.0	29	12.7	29	9.4	1984	-	44	717
	LT235/85R16	120/116R	E	BSW		352660	6.0- (6.5) -7.5	43	15.6	31.7	9.3	3042	2778	80	655
	P245/70R16	106S	SL	BSW		352100	6.5- (7.0) -8.0	36	12.9	29.5	9.8	2094	-	44	704
	P245/70R16	106S	SL	OWL		352110	6.5- (7.0) -8.0	34	12.9	29.5	9.8	2094	-	44	704
	P245/75R16	109S	SL	BSW		352120	6.5- (7.0) -8.0	34	12.9	30.5	9.8	2271	-	44	682
	P245/75R16	109S	SL	OWL		352130	6.5- (7.0) -8.0	34	12.9	30.5	9.8	2271	-	44	682
	LT245/75R16	108/104S	C	BSW		352550	6.5- (7.0) -8.0	45	15.7	30.5	9.8	2205	2006	50	682
	LT245/75R16	108/104S	C	OWL		352560	6.5- (7.0) -8.0	43	15.7	30.5	9.8	2205	2006	50	682
	LT245/75R16	120/116S	E	BSW		352530	6.5- (7.0) -8.0	45	15.7	30.5	9.8	3042	2778	80	682
	LT245/75R16	120/116S	E	OWL		352540	6.5- (7.0) -8.0	44	15.7	30.5	9.8	3042	2778	80	682
	255/65R16	109H	SL	BSW		352140	7.0- (7.5) -9.0	38	12.7	29.1	10.2	2271	-	51	715
	P255/70R16	109S	SL	BSW		352310	6.5- (7.5) -8.5	38	13.0	30.1	10.2	2271	-	44	691
	P255/70R16	109S	SL	OWL		352320	6.5- (7.5) -8.5	38	13.0	30.1	10.2	2271	-	44	691
	P265/70R16	111T	SL	BSW		352080	7.0- (8.0) -9.0	40	13.1	30.6	10.8	2403	-	44	679
	P265/70R16	111T	SL	OWL		352090	7.0- (8.0) -9.0	40	13.1	30.6	10.7	2403	-	44	678
	P265/75R16	114T	SL	BSW		352290	7.0- (7.5) -9.0	41	13.1	31.7	10.5	2601	-	44	656
	P265/75R16	114T	SL	OWL		352300	7.0- (7.5) -9.0	41	13.1	31.7	10.5	2601	-	44	656
	LT265/75R16	112/109T	C	BSW		352610	7.0- (7.5) -8.0	44	16.0	31.7	10.5	2470	2270	50	656
	LT265/75R16	112/109T	C	OWL		352620	7.0- (7.5) -8.0	45	16.0	31.7	10.5	2470	2270	50	656
	LT265/75R16	123/120R	E	BSW		352590	7.0- (7.5) -8.0	48	16.0	31.7	10.5	3415	3085	80	656
	LT265/75R16	123/120R	E	OWL		352600	7.0- (7.5) -8.0	47	16.0	31.7	10.5	3415	3085	80	656
	LT285/75R16	126/123R	E	BSW		352630	7.5- (8.0) -9.0	54	16.5	32.8	11.3	3750	3415	80	633
	LT285/75R16	126/123R	E	OWL		352640	7.5- (8.0) -9.0	53	16.5	32.8	11.3	3750	3415	80	633
	LT295/75R16	128R	E	XT	BSW	352820	7.5- (8.0) -9.5	64	17.1	33.4	11.6	3970	-	80	622
	LT305/70R16	124/121R	E	XT	BSW	352750	8.0- (9.0) -9.5	68	17.3	32.8	12.2	3525	3195	65	633
	LT315/75R16	127/124R	E	XT	BSW	352770	8.0- (8.5) -11.0	72	17.4	34.6	12.3	3860	3525	65	601
17	225/65R17	102H	SL	BSW		352960	6.0- (6.5) -8.0	30	12.5	28.5	9	1874	-	51	729
	P235/65R17	103H	SL	BSW		352050	6.5- (7.0) -8.5	34	12.5	29.1	9.4	1929	-	51	715
	P235/75R17	108S	SL	BSW		352260	6.0- (6.5) -8.0	39	12.7	30.9	9.3	2205	-	44	673
	LT235/80R17	120/117R	E	BSW		352470	6.0- (6.5) -7.5	44	15.6	31.8	9.3	3085	2835	80	653
	P245/65R17	105T	SL	BSW		352020	(7.0) -8.5	36	12.6	29.4	9.8	2039	-	44	705
	P245/65R17	105T	SL	OWL		352030	(7.0) -8.5	33	12.6	29.5	9.8	2039	-	44	704
	P245/70R17	108S	SL	BSW		352160	6.5- (7.0) -8.0	38	12.9	30.6	9.8	2205	-	44	680
	LT245/70R17	119/116R	E	BSW		352570	6.5- (7.0) -8.0	46	15.7	30.6	9.8	3000	2755	80	680
	LT245/75R17	121/118S	E	BSW		352520	6.5- (7.0) -7.5	46	15.7	31.5	9.8	3195	2910	80	660
	P255/70R17	110S	SL	BSW		352230	6.5- (7.5) -8.5	42	13.0	31.1	10.2	2337	-	44	668
	LT255/80R17	121/118R	E	BSW		353080	6.5- (7.0) -8.5	51	15.9	33.1	10	3195	2910	80	628
	P265/65R17	110T	SL	BSW		352040	7.5- (8.0) -9.5	39	12.9	30.5	10.8	2337	-	44	681
	P265/70R17	113S	SL	BSW		352000	7.0- (8.0) -9.0	41	13.1	31.5	10.7	2535	-	44	659
	P265/70R17	113S	SL	OWL		352010	7.0- (8.0) -9.0	41	13.1	31.5	10.7	2535	-	44	659
	LT265/70R17	121/118S	E	BSW		352410	7.0- (8.0) -8.5	49	16.0	31.7	10.7	3195	2910	80	656

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	CONSTRUCTION	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
17	LT265/70R17	121/118S	E		OWL	352420	7.0-(8.0)-8.5	49	16.0	31.7	10.7	3195	2910	80	656
	P285/70R17	117T	SL		BSW	352150	7.5-(8.5)-9.5	48	13.4	32.8	11.5	2833	-	44	634
	LT285/70R17	121/118S	E		BSW	352430	7.5-(8.5)-9.0	56	16.3	32.8	11.5	3195	2910	80	634
	LT285/70R17	121/118S	E		OWL	352440	7.5-(8.5)-9.0	51	16.3	32.8	11.5	3195	2910	80	634
	LT285/75R17	121/118S	E	XT	BSW	352790	7.5-(8.0)-9.5	63	17.0	33.9	11.3	3195	2910	80	614
	LT305/70R17	121/118R	E	XT	BSW	351170	8.0-(9.0)-9.5	64	17.3	33.9	12.2	3195	2910	65	614
	35X12.50R17LT	121R	E	XT	BSW	352810	8.5-(10.0)-11.0	70	17.4	34.5	12.5	3195	-	65	602
	255/55R18	109H	XL		BSW	352220	7.0-(8.0)-9.0	38	12.7	29	10.4	2271	-	50	716
	LT255/65R18	120/117S	E		BSW	353100	7.0-(7.5)-9.0	44	15.9	31.1	10.2	3085	2835	80	669
	P255/70R18	112T	SL		BSW	352250	6.5-(7.5)-8.5	45	13.0	32.1	10.2	2469	-	44	647
18	P265/60R18	109T	SL		BSW	352240	7.5-(8.0)-9.5	41	12.9	30.5	10.7	2271	-	44	681
	P265/65R18	112S	SL		BSW	352200	7.5-(8.0)-9.5	44	12.9	31.5	10.7	2469	-	44	659
	P265/70R18	114S	SL		BSW	352180	7.0-(8.0)-9.0	50	13.1	32.6	10.7	2601	-	44	636
	P275/65R18	114T	SL		BSW	352070	7.5-(8.0)-9.5	51	13.0	32.1	11	2601	-	44	647
	LT275/65R18	113/110T	C		BSW	352500	7.5-(8.0)-9.0	53	16.0	32.1	11	2535	2335	50	647
	LT275/65R18	113/110T	C		OWL	352510	7.5-(8.0)-9.0	50	16.0	32.1	11	2535	2335	50	647
	LT275/65R18	123/120S	E		BSW	352480	7.5-(8.0)-9.0	53	16.0	32.1	11	3415	3085	80	647
	LT275/65R18	123/120S	E		OWL	352490	7.5-(8.0)-9.0	50	16.0	32.1	11	3415	3085	80	647
	LT275/70R18	125/122S	E		BSW	352450	7.0-(8.0)-8.5	53	16.1	33.2	11	3640	3305	80	626
	LT275/70R18	125/122S	E		OWL	352460	7.0-(8.0)-8.5	51	16.1	33.2	11	3640	3305	80	626
	285/60R18	120S	XL		BSW	352190	8.0-(8.5)-10.0	54	13.6	31.5	11.5	3086	-	50	660
	LT285/65R18	125/122S	E	XT	BSW	352720	8.0-(8.5)-10.0	58	16.9	32.6	11.5	3640	3305	80	638
	LT285/75R18	129/126S	E	XT	BSW	352780	7.5-(8.0)-9.5	65	17.0	34.8	11.3	4080	3750	80	596
	LT295/70R18	129/126S	E	XT	BSW	352850	7.5-(8.5)-10.0	64	16.3	34.3	11.8	4080	3750	80	606
	LT325/60R18	124/121S	E	XT	BSW	352760	9.0-(9.5)-12.0	66	16.8	33.3	13	3525	3195	65	623
	LT325/65R18	127/124R	E	XT	BSW	351190	9.0-(9.5)-12.0	71	17.4	34.6	13	3860	3525	65	600
	33X12.50R18LT	122Q	F	XT	BSW	353020	8.5-(10.0)-11.0	65	17.0	32.5	12.5	3305	-	80	639
	35X12.50R18LT	123R	E	XT	BSW	352710	8.5-(10.0)-11.0	68	17.0	34.5	12.5	3415	-	65	602
35X12.50R18LT	128Q	F	XT	BSW	351490	8.5-(10.0)-11.0	68	17.0	34.5	12.5	3970	-	80	602	
20	P245/60R20	107T	SL		BSW	353060	(7.0)-8.5	32	12.6	31.6	9.8	2149	-	44	658
	265/50R20	111T	SL		BSW	351320	7.5-(8.5)-9.5	42	13.4	30.5	10.9	2403	-	50	682
	LT265/60R20	121/118S	E		BSW	353070	7.5-(8.0)-9.5	54	16.0	32.5	10.7	3195	2910	80	639
	275/55R20	117T	SL		BSW	353010	7.5-(8.5)-9.5	49	13.0	31.9	11.2	2833	-	50	651
	P275/60R20	114T	SL		BSW	352060	7.5-(8.0)-9.5	43	13.0	33	10.9	2601	-	44	630
	LT275/65R20	126/123S	E		BSW	352580	7.5-(8.0)-9.5	57	16.0	34.1	11	3750	3415	80	609
	LT285/55R20	122/119S	E	XT	BSW	352800	8.0-(9.0)-10.0	59	16.0	32.4	11.7	3305	3000	80	642
	LT285/60R20	125/122R	E	XT	BSW	353110	8.0-(8.5)-10.0	59	16.3	33.5	11.5	3640	3305	80	621
	LT295/55R20	123/120S	E	XT	BSW	352880	8.0-(9.5)-10.0	61	16.3	32.8	12.2	3415	3085	80	634
	LT295/60R20	126/123S	E	XT	BSW	352860	8.0-(8.5)-10.0	62	16.4	33.9	11.8	3750	3415	80	612
	LT295/65R20	129/126S	E	XT	BSW	352870	8.0-(8.5)-10.0	64	17.0	35.1	11.8	4080	3750	80	592
	305/50R20	120S	XL		BSW	352210	8.5-(9.5)-11.0	51	13.9	32	12.4	3086	-	50	648
	305/50R20	120T	XL		BSW	350740	8.5-(9.5)-11.0	51	13.9	32	12.4	3086	-	50	648
	LT305/55R20	121/118S	E	XT	BSW	352740	8.5-(9.5)-11.0	62	16.3	33.2	12.4	3195	2910	65	625
	LT305/55R20	125/122Q	F	XT	BSW	351500	8.5-(9.5)-11.0	66	16.3	33.2	12.4	3640	3305	80	625
	LT325/60R20	126/123R	E	XT	BSW	351180	9.0-(9.5)-12.0	71	16.8	35.4	13	3750	3415	65	588
	33X12.50R20LT	119Q	F	XT	BSW	353030	8.5-(10.0)-11.0	64	16.8	32.5	12.5	3000	-	80	639
	35X12.50R20LT	121R	E	XT	BSW	352730	8.5-(10.0)-11.0	66	16.8	34.5	12.5	3195	-	65	602
35X12.50R20LT	125Q	F	XT	BSW	351510	8.5-(10.0)-11.0	69	16.9	34.5	12.5	3640	-	80	602	
35X13.50R20LT	126Q	F	XT	BSW	353090	9.5-(11.0)-12.0	79	16.5	34.5	13.6	3750	-	80	602	
22	LT325/50R22	122R	E	XT	BSW	352830	9.0-(10.0)-12.0	69	17.0	34.8	13.2	3305	-	65	596
	33X12.50R22LT	114Q	F	XT	BSW	353040	8.5-(10.0)-11.0	58	15.6	32.5	12.5	2600	-	80	639
	35X12.50R22LT	121Q	F	XT	BSW	353050	8.5-(10.0)-11.0	67	16.4	34.5	12.5	3195	-	80	602
	37X12.50R22LT	127Q	F	XT	BSW	353120	9.0-(10.0)-11.5	73	16.8	36.5	12.5	3860	-	80	569

LT

LIGHT TRUCK / SUV / CUV



HIGHWAY ALL-SEASON TIRE

The Open Country H/T balances mileage, handling, and ride comfort in city and open-road driving. Designed for light trucks and large SUVs, this all-season tire is available in a wide range of original equipment sizes.

MILEAGE WARRANTY*

P-Metric and Metric Sizes: 60,000 miles

LT: 50,000 miles (valid on tires purchased on or after Jan 1, 2017.)

POPULAR FITMENTS

Chevrolet Tahoe
Chevrolet Trucks
Ford Expedition
Ford F-Series
Ram Series
Toyota Trucks

UTQG

P-Metric/Metric
S/T-Rated: 640 A B
H/V-Rated: 640 A A

WEAR-RESISTANT TREAD COMPOUND

- Extends tread life and durability.

OPEN COUNTRY H/T

STABILITY RIB IN SHOULDER AREA

- Promotes even shoulder wear.

SYMMETRIC, VARIABLE PITCH TREAD DESIGN

- Contributes to a quiet, comfortable ride.

TWO DEEP EVACUATION GROOVES

- Evacuates water to improve straight aquaplaning and handling performance.

FULL-DEPTH MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Continues to aid with wet and snow traction as tire wears.



LT

LIGHT TRUCK / SUV / CUV


TOYO TIRES®

LT

LIGHT TRUCK / SUV / CUV

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15		P225/70R15	100T	SL	OWL	362030	6.0- (6.5) -7.5	26	12.6	27.4	8.9	1753	-	35	757
		P225/75R15	102S	SL	OWL	362140	(6.0) -7.5	28	12.6	28.3	8.9	1874	-	35	733
		P235/70R15	102S	SL	OWL	362040	6.0- (7.0) -8.0	28	12.7	28.0	9.4	1896	-	35	743
		P235/75R15	105S	SL	OWL	362150	6.0- (6.5) -8.0	31	12.7	28.9	9.3	2028	-	35	719
		LT235/75R15	104/101S	C	OWL	362210	6.0- (6.5) -7.0	34	14.0	28.8	9.5	1985	1820	50	722
		P265/70R15	110S	SL	BSW	362050	7.0- (8.0) -9.0	37	13.1	29.6	10.4	2337	-	35	702
		31x10.50R15LT	109S	C	OWL	362000	7.0- (8.5) -9.0	43	15.6	30.3	10.9	2270	-	50	685
16		215/65R16	98H	SL	BSW	362340	6.0- (6.5) -7.5	25	12.2	27.0	8.8	1653	-	44	770
		P215/70R16	99H	SL	BSW	362060	5.5- (6.5) -7.0	28	12.5	27.9	8.7	1709	-	35	744
		LT215/85R16	115/112S	E	BSW	362290	5.5- (6.0) -7.0	41	15.0	30.4	8.9	2680	2470	80	683
		P225/70R16	101T	SL	OWL	362070	6.0- (6.5) -7.5	29	12.6	28.4	9.0	1819	-	35	731
		P225/75R16	104S	SL	OWL	362160	(6.0) -7.5	31	12.6	29.3	8.9	1984	-	35	708
		LT225/75R16	115/112S	E	BSW	362220	(6.0) -7.0	39	13.9	29.3	9.1	2680	2470	80	710
		235/60R16	100H	SL	BSW	362330	6.5- (7.0) -8.5	28	12.5	27.1	9.4	1764	-	44	767
		P235/65R16	101S	SL	BSW	362360	6.5- (7.0) -8.5	31	12.5	28.0	9.6	1819	-	35	741
		P235/70R16	104T	SL	OWL	362080	6.0- (7.0) -8.0	30	12.7	28.9	9.3	1984	-	35	718
		P235/75R16	106S	SL	OWL	362660	6.0- (6.5) -8.0	34	12.9	29.8	9.4	2094	-	35	697
		LT235/85R16	120/116S	E	OWL	362280	6.0- (6.5) -7.5	44	15.2	31.8	9.4	3042	2778	80	654
		P245/70R16	106S	SL	OWL	362090	6.5- (7.0) -8.0	35	12.9	29.4	9.6	2094	-	35	706
		P245/75R16	109S	SL	OWL	362170	6.5- (7.0) -8.0	40	12.9	30.4	9.8	2271	-	35	683
		LT245/75R16	120/116S	E	OWL	362230	6.5- (7.0) -8.0	45	15.2	30.4	9.8	3042	2778	80	684
		255/65R16	109H	SL	BSW	362350	7.0- (7.5) -9.0	34	12.7	29.1	10.2	2271	-	44	715
		P255/70R16	109S	SL	OWL	362100	6.5- (7.5) -8.5	38	13.0	30.0	10.1	2271	-	35	692
		P265/70R16	111S	SL	OWL	362110	7.0- (8.0) -9.0	40	13.1	30.6	10.4	2403	-	35	678
		P265/75R16	114T	SL	OWL	362180	7.0- (7.5) -9.0	41	13.1	31.5	10.4	2601	-	35	659
		LT265/75R16	112/109S	C	OWL	362240	7.0- (7.5) -8.0	45	15.6	31.6	10.8	2470	2270	50	658
		LT265/75R16	123/120S	E	OWL	362260	7.0- (7.5) -8.0	50	15.6	31.6	10.8	3415	3085	80	658
		P275/70R16	114H	SL	BSW	362120	7.0- (8.0) -9.0	41	13.2	31.1	10.8	2601	-	35	667
17		LT285/75R16	126/123S	E	OWL	362920	7.5- (8.0) -9.0	56	16.5	32.8	11.4	3750	3415	80	633
		225/65R17	102H	SL	BSW	362510	6.0- (6.5) -8.0	30	12.3	28.5	8.9	1874	-	44	729
		P235/60R17	100S	SL	BSW	363060	6.5- (7.0) -8.5	34	12.5	28.2	9.4	1764	-	35	737
		P235/60R17	100S	SL	OWL	362630	6.5- (7.0) -8.5	32	11.3	28.2	9.4	1764	-	35	737
		235/65R17	104H	SL	BSW	363000	6.5- (7.0) -8.5	36	12.5	29.1	9.4	1984	-	44	713
		235/65R17	104H	SL	OWL	362370	6.5- (7.0) -8.5	33	12.5	29.0	9.4	1984	-	44	716
		P235/70R17	108S	RD	BSW	363070	6.0- (7.0) -8.0	38	12.7	29.9	9.4	2205	-	41	695
		P235/70R17	108S	RD	OWL	362650	6.0- (7.0) -8.0	32	12.7	29.9	9.4	2205	-	41	695
		P235/75R17	108S	SL	OWL	362670	6.0- (6.5) -8.0	36	12.9	30.9	9.5	2205	-	35	673
		LT235/80R17	120/117S	E	BSW	362270	6.0- (6.5) -7.5	43	15.2	31.7	9.2	3085	2835	80	655
		P245/65R17	105H	SL	BSW	362990	(7.0) -8.5	38	12.6	29.5	9.7	2039	-	35	704
		P245/65R17	105H	SL	OWL	362010	(7.0) -8.5	34	12.6	29.5	9.7	2039	-	35	704
		P245/70R17	108S	SL	BSW	363020	6.5- (7.0) -8.0	41	12.9	30.4	9.8	2205	-	35	683
		P245/70R17	108S	SL	OWL	362300	6.5- (7.0) -8.0	38	12.9	30.6	9.8	2205	-	35	680
		LT245/70R17	119/116S	E	BSW	363040	6.5- (7.0) -8.0	46	15.4	30.6	9.9	3000	2755	80	678
		LT245/70R17	119/116S	E	OWL	362190	6.5- (7.0) -8.0	44	15.4	30.5	9.8	3000	2755	80	681
		P245/75R17	110S	SL	OWL	362680	6.5- (7.0) -8.0	38	12.9	31.5	9.8	2337	-	35	660
		LT245/75R17	121/118S	E	BSW	362780	6.5- (7.0) -7.5	49	15.2	31.5	9.8	3195	2910	80	660
		LT245/75R17	121/118S	E	OWL	362620	6.5- (7.0) -7.5	47	15.2	31.5	9.9	3195	2910	80	660
		255/60R17	106H	SL	BSW	362590	7.0- (7.5) -9.0	35	12.9	29.1	10.3	2094	-	44	715
		P255/65R17	108S	SL	BSW	363030	7.0- (7.5) -9.0	40	12.7	30.1	10.4	2205	-	35	691

LT

LIGHT TRUCK / SUV / CUV

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
17		P255/65R17	108S	SL	OWL	362430	7.0- (7.5) -9.0	38	12.7	30.1	10.3	2205	-	35	691
		P255/70R17	110S	SL	BSW	363050	6.5- (7.5) -8.5	42	13.0	31.1	10.3	2337	-	35	668
		P255/70R17	110S	SL	OWL	362310	6.5- (7.5) -8.5	41	13.0	31.1	10.3	2337	-	35	668
		P265/65R17	110S	SL	BSW	363010	7.5- (8.0) -9.5	42	12.9	30.6	10.8	2337	-	35	680
		P265/65R17	110S	SL	OWL	362020	7.5- (8.0) -9.5	40	12.9	30.5	10.6	2337	-	35	682
		P265/70R17	113T	SL	BSW	362980	7.0- (8.0) -9.0	45	13.1	31.5	10.8	2535	-	35	660
		P265/70R17	113T	SL	OWL	362130	7.0- (8.0) -9.0	42	13.1	31.5	10.7	2535	-	35	659
		LT265/70R17	121/118S	E	BSW	362770	7.0- (8.0) -8.5	51	15.6	31.6	10.7	3195	2910	80	658
		LT265/70R17	121/118S	E	OWL	362200	7.0- (8.0) -8.5	50	15.6	31.6	10.7	3195	2910	80	658
		P285/70R17	117T	SL	BSW	362540	7.5- (8.5) -9.5	45	13.4	32.7	11.4	2833	-	35	636
	LT285/70R17	121/118S	E	OWL	362940	7.5- (8.5) -9.0	55	16.5	32.7	11.7	3195	2910	80	636	
18		235/55R18	100V	SL	BSW	362400	6.5- (7.5) -8.5	27	10.1	28.2	9.6	1764	-	44	738
		235/60R18	107V	RD	BSW	362560	6.5- (7.0) -8.5	33	10.7	29.1	9.4	2150	-	50	714
		P235/65R18	104T	SL	BSW	362640	6.5- (7.0) -8.5	32	12.5	30.2	9.6	1984	-	35	689
		P245/60R18	104H	SL	BSW	362760	(7.0) -8.5	35	12.6	29.6	9.6	1984	-	35	701
		255/55R18	109V	RD	BSW	362570	7.0- (8.0) -9.0	36	12.2	29.1	10.4	2271	-	50	715
		255/60R18	112H	RD	BSW	362600	7.0- (7.5) -9.0	37	12.7	30.0	10.1	2469	-	50	692
		P255/65R18	109S	SL	BSW	364150	7.0- (7.5) -9.0	39	11.6	31.1	10.2	2271	-	44	669
		255/70R18	113S	SL	BSW	362610	6.5- (7.5) -8.5	39	11.8	32.2	10.4	2535	-	44	646
		P265/60R18	109T	SL	BSW	363080	7.5- (8.0) -9.5	42	12.9	30.5	10.8	2271	-	35	681
		P265/60R18	109T	SL	OWL	362460	7.0- (8.0) -9.5	37	12.9	30.5	10.6	2271	-	35	682
		P265/65R18	112S	SL	BSW	362910	7.5- (8.0) -9.5	41	12.9	31.5	10.7	2469	-	35	660
		P265/70R18	114S	SL	BSW	362830	7.0- (8.0) -9.0	48	13.1	32.6	10.8	2601	-	35	636
		P265/70R18	114S	SL	OWL	362320	7.0- (8.0) -9.0	44	13.1	32.6	10.8	2601	-	35	636
		P275/60R18	111H	SL	BSW	362710	7.5- (8.0) -9.5	39	13.0	30.8	10.9	2403	-	35	675
		P275/65R18	114T	SL	BSW	362840	7.5- (8.0) -9.5	47	13.0	32.2	11.0	2601	-	35	646
		P275/65R18	114T	SL	OWL	362470	7.5- (8.0) -9.5	45	13.0	32.2	11.0	2601	-	35	646
		LT275/65R18	123S	E	BSW	362790	7.5- (8.0) -9.0	53	15.6	32.0	10.9	3415	-	80	650
		LT275/65R18	123S	E	OWL	362480	7.5- (8.0) -9.0	52	15.6	32.0	10.9	3415	-	80	650
	LT275/70R18	125S	E	BSW	363090	7.0- (8.0) -8.5	55	15.6	33.1	11.2	3640	-	80	628	
	LT275/70R18	125S	E	OWL	362450	7.0- (8.0) -8.5	53	15.6	33.1	11.0	3640	-	80	628	
19		P245/55R19	103S	SL	BSW	362850	7.0- (7.5) -8.5	34	12.6	29.7	9.6	1929	-	44	700
		255/55R19	111V	RD	BSW	362580	7.0- (8.0) -9.0	38	12.2	30.0	10.4	2403	-	50	692
		255/60R19	109H	SL	BSW	364080	7.0- (7.5) -9.0	37	12.7	31.1	10.2	2271	-	44	669
20		P235/55R20	102T	SL	BSW	362860	6.5- (7.5) -8.5	34	12.5	30.2	9.4	1874	-	44	687
		P245/50R20	102V	SL	BSW	364130	7.0- (7.5) -8.5	36	11.8	29.7	10.0	1874	-	44	700
		P255/55R20	107H	SL	BSW	364140	7.0- (8.0) -9.0	38	12.7	31.0	10.4	2149	-	44	670
		265/50R20	111V	RD	BSW	362690	7.5- (8.5) -9.5	40	10.8	30.4	10.9	2403	-	50	683
		275/55R20	117S	RD	OWL	362700	7.5- (8.5) -9.5	42	13.0	31.9	11.4	2833	-	50	651
		P275/60R20	114S	SL	OWL	362890	7.5- (8.0) -9.5	47	13.0	33.1	10.9	2601	-	35	627
22		285/45R22	114H	RD	BSW	362720	9.0- (9.5) -10.5	43	12.2	32.0	11.2	2601	-	50	648

LT

LIGHT TRUCK / SUV / CUV



CUV/SUV TOURING ALL-SEASON TIRE

The Open Country Q/T offers a quiet, comfortable ride; impressive tread life; and attractive design. Built for a wide range of vehicles, from CUVs to luxury SUVs, this premium all-season tire also provides confident handling and stability. It comes with a 65,000-mile treadwear warranty and is backed by the Toyo Tires No Regrets Trial Offer.

MILEAGE WARRANTY*
65,000 miles

POPULAR FITMENTS

Acura MDX
BMW X-Series
Honda CR-V
Lexus NX/RX
Nissan Rogue
Toyota RAV4

UTQG

H/V-rated: 680 A A
S/T-rated: 680 A B

FOUR WIDE CIRCUMFERENTIAL GROOVES

- Evacuates water to improve wet traction.

OPEN COUNTRY Q/T

OPEN LATERAL SLITS

- Improves water drainage for better wet performance.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on wet and dry roads.
- Improves light snow traction.



LIGHT TRUCK / SUV / CUV

LT



TOYO TIRES®

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
16	215/70R16	100H	SL	BSW	318050	5.5- (6.5) -7.0	29	12.2	27.9	8.7	1764	-	51	745
	225/70R16	103H	SL	BSW	318060	6.0- (6.5) -7.5	31	12.3	28.4	9.0	1929	-	51	731
	P235/70R16	104T	SL	BSW	318070	6.0- (7.0) -8.0	33	12.5	29.0	9.4	1984	-	44	717
	255/65R16	109H	SL	BSW	318120	7.0- (7.5) -9.0	37	12.7	29.1	10.2	2271	-	51	715
17	225/65R17	102H	SL	BSW	318010	6.0- (6.5) -8.0	31	12.3	28.5	9.0	1874	-	51	729
	235/60R17	102T	SL	BSW	318160	6.5- (7.0) -8.5	33	12.5	28.1	9.4	1874	-	44	739
	235/65R17	108V	XL	BSW	318090	6.5- (7.0) -8.5	33	12.0	29.1	9.4	2205	-	50	715
	P245/65R17	105H	SL	BSW	318110	(7.0) -8.5	37	12.6	29.5	9.8	2039	-	51	704
	255/60R17	106V	SL	BSW	318190	7.0- (7.5) -9.0	36	12.2	29.1	10.2	2094	-	51	715
	P265/65R17	110S	SL	BSW	318140	7.5- (8.0) -9.5	42	12.9	30.6	10.7	2337	-	44	680
	P265/70R17	113H	SL	BSW	318000	7.0- (8.0) -9.0	42	12.9	31.7	10.7	2535	-	51	656
18	235/55R18	100V	SL	BSW	318240	6.5- (7.5) -8.5	32	12.0	28.1	9.6	1764	-	51	738
	235/60R18	107V	XL	BSW	318170	6.5- (7.0) -8.5	33	12.0	29.1	9.4	2149	-	50	714
	235/65R18	106V	SL	BSW	318390	6.5- (7.0) -8.5	35	11.7	30.0	9.4	2094	-	51	692
	245/60R18	105H	SL	BSW	318180	(7.0) -8.5	35	12.6	29.6	9.8	2039	-	51	703
	255/55R18	109V	XL	BSW	318020	7.0- (8.0) -9.0	36	12.2	29.0	10.4	2271	-	50	716
	255/60R18	112V	XL	BSW	318200	7.0- (7.5) -9.0	37	12.2	30.0	10.2	2469	-	50	692
	P255/65R18	109S	SL	BSW	318130	7.0- (7.5) -9.0	39	12.7	31.1	10.2	2271	-	44	669
	265/60R18	110V	SL	BSW	318220	7.5- (8.0) -9.5	40	12.2	30.5	10.7	2337	-	51	681
	P265/65R18	112H	SL	BSW	318150	7.5- (8.0) -9.5	43	12.9	31.5	10.7	2469	-	51	659

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
19	P225/55R19	99V	SL	BSW	318230	6.0- (7.0) -8.0	33	11.8	28.8	9.2	1709	-	51	722
	235/50R19	99H	SL	BSW	318310	6.5- (7.5) -8.5	32	12.0	28.3	9.6	1709	-	51	734
	235/50R19	99V	SL	BSW	318380	6.5- (7.5) -8.5	32	11.7	28.3	9.6	1709	-	51	734
	235/55R19	105V	XL	BSW	318250	6.5- (7.5) -8.5	33	12.0	29.2	9.6	2039	-	50	712
	P245/55R19	103H	SL	BSW	318270	7.0- (7.5) -8.5	36	12.6	29.6	10.0	1929	-	51	701
	255/50R19	107V	XL	BSW	318330	7.0- (8.0) -9.0	36	12.2	29.1	10.4	2149	-	50	714
	255/55R19	111V	XL	BSW	318280	7.0- (8.0) -9.0	38	12.2	30.0	10.4	2403	-	50	692
	255/60R19	109H	SL	BSW	318210	7.0- (7.5) -9.0	40	12.7	31.1	10.2	2271	-	51	669
	265/50R19	110V	XL	BSW	318350	7.5- (8.5) -9.5	38	12.2	29.5	10.9	2337	-	50	704
	275/55R19	111V	SL	BSW	318300	7.5- (8.5) -9.5	42	12.3	30.9	11.2	2403	-	51	672
20	235/55R20	102V	SL	BSW	318370	6.5- (7.5) -8.5	35	12.5	30.2	9.6	1874	-	51	689
	P245/50R20	102V	SL	BSW	318320	7.0- (7.5) -8.5	37	12.1	29.7	10.0	1874	-	51	700
	255/50R20	109V	XL	BSW	318340	7.0- (8.0) -9.0	36	12.2	30.1	10.4	2271	-	50	691
	255/55R20	110V	XL	BSW	318290	7.0- (8.0) -9.0	39	12.2	31.0	10.4	2337	-	50	670
	265/50R20	111V	XL	BSW	318360	7.5- (8.5) -9.5	39	12.2	30.5	10.9	2403	-	50	682
22	P285/45R22	110H	SL	BSW	318030	9.0- (9.5) -10.5	47	12.5	32.1	11.2	2337	-	51	647

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

STREET/SPORT TRUCK ALL-SEASON TIRE

The Proxes ST III is the perfect balance of dynamic looks and sport-oriented performance for trucks and SUVs. With a wider tread and a silica-based tread compound, the Proxes ST III stops up to 6 feet shorter in wet conditions^ while delivering superb handling, excellent all-season performance, consistent wear, and a smooth, quiet ride now backed by a 40,000-mile warranty.

MILEAGE WARRANTY*
40,000 miles

POPULAR FITMENTS
BMW X3
Cadillac Escalade
Chevrolet Tahoe
Infiniti QX60
Lexus LX
Range Rover Sport

UTQG
500 A A



DYNAMIC DIRECTIONAL,
ALL-SEASON TREAD DESIGN

- Provides a good balance between wet traction, dry handling and performance-based looks.

LIGHTNING GROOVES

- Enables better water evacuation resulting in better wet performance.

ARROWHEAD TAPERS

- Delivers increased tread block stiffness resulting in better straight-line driving stability.

DIRECTIONAL SHOULDER BLOCKS

- Stabilizes tread blocks for better braking performance and a quieter ride.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves light snow traction.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS) SINGLE	MAX PRESSURE (PSI)	REVS PER MILE
17	225/65R17	106V	XL	BSW	247080	6.0-(6.5)-8.0	29.5	10.1	28.5	9.0	2094	50	729
	235/65R17	108V	XL	BSW	247560	6.5-(7.0)-8.5	31.7	10.1	29.1	9.4	2205	50	715
	255/60R17	110V	XL	BSW	247090	7.0-(7.5)-9.0	35.3	10.1	29.1	10.2	2337	50	715
	275/55R17	109V	SL	BSW	247520	7.5-(8.5)-9.5	35.5	10.1	28.9	11.2	2271	51	719
	275/60R17	110V	SL	BSW	247060	7.5-(8.0)-9.5	36.5	10.1	30.0	11.0	2337	51	692
18	225/55R18	102V	XL	BSW	247580	6.0-(7.0)-8.0	28.6	10.1	27.8	9.2	1874	50	748
	235/60R18	107V	XL	BSW	247120	6.5-(7.0)-8.5	31.1	10.1	29.1	9.4	2149	50	714
	235/65R18	110V	XL	BSW	247510	6.5-(7.0)-8.5	35.3	10.1	30.0	9.4	2337	50	692
	245/60R18	105V	SL	BSW	247530	(7.0)-8.5	31.7	10.1	29.6	9.8	2039	51	703
	255/55R18	109V	XL	BSW	247570	7.0-(8.0)-9.0	33	10.1	29.0	10.4	2271	50	716
	255/60R18	112V	XL	BSW	247150	7.0-(7.5)-9.0	35.7	10.1	30.0	10.2	2469	50	692
	265/60R18	114V	XL	BSW	247160	7.5-(8.0)-9.5	35.5	10.1	30.5	10.7	2601	50	681
	285/60R18	120V	XL	BSW	247590	8.0-(8.5)-10.0	41	10.2	31.5	11.5	3086	50	660
	295/45R18	112V	XL	BSW	247180	9.5-(10.0)-11.0	35.1	10.1	28.5	11.7	2469	50	730
19	235/55R19	105V	XL	BSW	247190	6.5-(7.5)-8.5	31.7	10.1	29.2	9.6	2039	50	712
	255/50R19	107V	XL	BSW	247200	7.0-(8.0)-9.0	34.4	10.1	29.1	10.4	2149	50	714
	255/55R19	111V	XL	BSW	247210	7.0-(8.0)-9.0	36.4	10.1	30.0	10.4	2403	50	692
20	235/55R20	105V	XL	BSW	247220	6.5-(7.5)-8.5	34	10.1	30.2	9.6	2039	50	689
	245/50R20	102V	SL	BSW	247010	7.0-(7.5)-8.5	32.3	10.1	29.7	10.0	1874	51	700
	255/45R20	105V	XL	BSW	247230	8.0-(8.5)-9.5	32.8	10.1	29.1	10.0	2039	50	715
	255/50R20	109V	XL	BSW	247240	7.0-(8.0)-9.0	34.4	10.1	30.1	10.4	2271	50	691
	265/45R20	108V	XL	BSW	247250	8.5-(9.0)-10.0	34	10.1	29.4	10.5	2205	50	707
	265/50R20	111V	XL	BSW	247260	7.5-(8.5)-9.5	36.9	10.1	30.5	10.9	2403	50	682
	275/40R20	106W	XL	BSW	247020	9.0-(9.5)-11.0	33.4	10.1	28.7	10.9	2094	50	725
	275/45R20	110V	XL	BSW	247600	8.5-(9.0)-10.5	34.8	10.1	29.8	10.7	2337	50	698
	275/55R20	117V	XL	BSW	247500	7.5-(8.5)-9.5	41.1	10.1	31.9	11.2	2833	50	651
	285/50R20	116V	XL	BSW	247280	8.0-(9.0)-10.0	40.6	10.1	31.3	11.7	2756	50	665
	295/40R20	110V	XL	BSW	247290	10.0-(10.5)-11.5	37.3	10.1	29.3	11.9	2337	50	709
	295/45R20	114V	XL	BSW	247300	9.5-(10.0)-11.0	37.9	10.1	30.5	11.7	2601	50	682
22	305/50R20	120V	XL	BSW	247310	8.5-(9.5)-11.0	43.9	10.3	32.0	12.4	3086	50	648
	315/35R20	110W	XL	BSW	247320	10.5-(11.0)-12.5	37.3	10.1	28.7	12.6	2337	50	725
	265/35R22	102W	XL	BSW	247550	9.0-(9.5)-10.5	34	10.1	29.3	10.7	1874	50	708
	265/40R22	106W	XL	BSW	247340	9.0-(9.5)-10.5	36.8	10.1	30.4	10.7	2094	50	684
	285/35R22	106W	XL	BSW	247350	9.5-(10.0)-11.0	37.5	10.1	29.9	11.4	2094	50	695
	285/40R22	110V	XL	BSW	247360	9.5-(10.0)-11.0	42.1	10.1	31.0	11.4	2337	50	670
	285/45R22	114V	XL	BSW	247370	9.0-(9.5)-10.5	40.8	10.1	32.1	11.2	2601	50	647
	295/30R22	103W	XL	BSW	247380	10.0-(10.5)-11.0	35.1	10.1	29.0	11.9	1929	50	716
	295/35R22	108W	XL	BSW	247390	10.0-(10.5)-11.5	40.1	10.1	30.1	11.9	2205	50	690
	305/40R22	114V	XL	BSW	247400	10.0-(11.0)-12.0	43.7	10.1	31.6	12.3	2601	50	657
24	305/45R22	118V	XL	BSW	247610	9.5-(10.0)-11.5	45.6	10.1	32.8	11.9	2910	50	633
	335/25R22	105W	XL	BSW	247420	11.5-(12.0)-12.5	38.4	10.2	28.6	13.5	2039	50	726
	285/35R24	108W	XL	BSW	247460	9.5-(10.0)-11.0	40.8	10.1	31.9	11.4	2205	50	651
	285/40R24	112V	XL	BSW	247430	9.5-(10.0)-11.0	43.9	10.1	33.0	11.4	2469	50	630
	295/30R24	104W	XL	BSW	247440	10.0-(10.5)-11.0	38.4	10.1	31.0	11.9	1984	50	670
	305/35R24	112W	XL	BSW	247450	10.0-(11.0)-12.0	44.5	10.1	32.4	12.3	2469	50	640

*Performance claim based upon commissioned third-party test results. Wet braking based on tests of Toyo Proxes® ST III™ 275/55R20 and Toyo Proxes® ST III™ 275/55R20, from 60 to 0 mph.

Speed rated "V" = 149mph, "W" = 168mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

STREET/SPORT TRUCK ALL-SEASON TIRE

This low-profile, high performance tire offers great value in a wide range of weather and road conditions. The Proxes S/T gives sport trucks, SUVs, and CUVs stability and all-season handling plus high performance, long tread life, and a smooth ride.

POPULAR FITMENTS

Cadillac Escalade
Chevrolet Tahoe
Infiniti Q-Series
Land Rover
Range Rover
Porsche Cayenne
Toyota Sequoia

UTQG
420 A A



ALL-SEASON TREAD COMPOUND AND DESIGN

- Provides balanced wet, dry, and light snow performance.
- Contributes to exceptional tread life.

DOUBLE “V-SHAPED” TREAD GROOVES

- Evacuates water for good all-season performance.

REINFORCED CONSTRUCTION

- Provides higher maximum load capacity.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
20	265/50R20	111V	RD	BSW	242330	7.5- (8.5) -9.5	39	11.3	30.4	11.0	2403	-	50	683
	275/40R20	106W	RD	BSW	242740	9.0- (9.5) -11.0	34	10.6	28.6	10.8	2094	-	50	727
	275/45R20	110V	RD	BSW	242790	8.5- (9.0) -10.5	34	10.7	29.8	10.6	2337	-	50	698
	275/55R20	117V	RD	BSW	242800	7.5- (8.5) -9.5	42	11.2	31.9	11.0	2833	-	50	652
	285/50R20	116V	RD	BSW	242710	8.0- (9.0) -10.0	42	10.8	31.1	11.6	2756	-	50	669
	295/45R20	114V	RD	BSW	242320	9.5- (10.0) -11.0	40	11.0	30.5	11.7	2601	-	50	683
	305/50R20	120V	RD	BSW	242350	8.5- (9.5) -11.0	45	11.5	32.1	12.4	3086	-	50	648
22	265/35R22	102W	RD	BSW	242760	9.0- (9.5) -10.5	34	10.5	29.3	10.4	1874	-	50	708
	265/40R22	106V	RD	BSW	242460	9.0- (9.5) -10.5	45	10.5	30.4	10.7	2094	-	50	684
	285/45R22	114V	RD	BSW	242690	9.0- (9.5) -10.5	42	10.8	32.2	11.2	2601	-	50	645
	305/40R22	114V	RD	BSW	242390	10.0- (10.5) -12.0	45	11.0	31.6	12.3	2601	-	50	657
	305/45R22	118V	RD	BSW	242370	9.5- (10.0) -11.5	48	11.0	32.8	12.0	2910	-	50	636
24	305/35R24	112V	RD	BSW	242820	10.0- (11.0) -12.0	42	11.0	32.5	12.1	2469	-	50	640

Speed rated "V" = 149mph, "W" = 168mph. "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

CUV/SUV TOURING VARIABLE-CONDITIONS TIRE

Toyo Celsius CUV offers year-round versatility plus winter-weather safety in one. This variable-conditions tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire. Celsius stops up to 31 feet shorter on snow than a typical all-season tire^ plus it's backed by a 60,000-mile warranty.

MILEAGE WARRANTY*
60,000 miles

POPULAR FITMENTS

Audi Q5
Chevrolet Equinox
Ford Edge
Honda CR-V
Subaru Outback
Toyota RAV4

UTQG

500 A A
520 A A



Three-Peak Mountain
Snowflake qualified for
severe snow conditions.

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for stability and traction on wet and dry roads.

SNOW CLAWS

- Improves deep snow traction.
- Increases block rigidity for better ice and wet traction.

SLUSH GROOVES

- Increases traction by evacuating slush and snow.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on icy, wet, and dry roads.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS) SINGLE	MAX PRESSURE (PSI)	REVS PER MILE
17	225/55R17	101V	XL	BSW	128000	6.0-(7.0)-8.0	28	11.0	26.8	9.2	1819	50	776
	225/60R17	99V	SL	BSW	128020	6.0-(6.5)-8.0	28	11.1	27.6	9	1709	51	752
	225/65R17	102H	SL	BSW	128040	6.0-(6.5)-8.0	31	11.2	28.5	9	1874	51	729
	235/55R17	103V	XL	BSW	128010	6.5-(7.5)-8.5	31	11.1	27.2	9.6	1929	50	765
	235/60R17	102H	SL	BSW	128030	6.5-(7.0)-8.5	31	11.2	28.1	9.4	1874	51	739
	235/65R17	108V	XL	BSW	128050	6.5-(7.0)-8.5	33	11.3	29.1	9.4	2205	50	715
	P245/65R17	105H	SL	BSW	128060	(7.0)-8.5	33	11.3	29.5	9.8	2039	51	704
18	235/55R18	100V	SL	BSW	128070	6.5-(7.5)-8.5	31	11.1	28.1	9.6	1764	51	738
	235/60R18	107V	XL	BSW	128090	6.5-(7.0)-8.5	33	11.2	29.1	9.4	2149	50	714
	P235/65R18	104H	SL	BSW	128120	6.5-(7.0)-8.5	32	11.3	30	9.4	1984	51	692
	245/60R18	105H	SL	BSW	128100	(7.0)-8.5	33	11.3	29.6	9.8	2039	51	703
	255/55R18	109V	XL	BSW	128080	7.0-(8.0)-9.0	36	11.3	29	10.4	2271	50	716
	P255/65R18	109H	SL	BSW	128130	7.0-(7.5)-9.0	38	11.3	31.1	10.2	2271	51	669
	265/60R18	110V	SL	BSW	128110	7.5-(8.0)-9.5	40	11.3	30.5	10.7	2337	51	681
19	235/50R19	99H	SL	BSW	128140	6.5-(7.5)-8.5	32	11.1	28.3	9.6	1709	51	734
	235/55R19	105V	XL	BSW	128170	6.5-(7.5)-8.5	33	11.1	29.2	9.6	2039	50	712
	P245/55R19	103H	SL	BSW	128180	7.0-(7.5)-8.5	34	11.2	29.6	10	1929	51	701
	255/50R19	107V	XL	BSW	128150	7.0-(8.0)-9.0	35	11.3	29.1	10.4	2149	50	714
	P255/60R19	108H	SL	BSW	128200	7.0-(7.5)-9.0	40	11.3	31.1	10.2	2205	51	669
	265/50R19	110H	XL	BSW	128160	7.5-(8.5)-9.5	37	11.3	29.5	10.9	2337	50	704
	275/55R19	111V	SL	BSW	128190	7.5-(8.5)-9.5	40	11.3	30.9	11.2	2403	51	672
20	P235/55R20	102H	SL	BSW	128230	6.5-(7.5)-8.5	32	11.1	30.2	9.6	1874	51	689
	P245/50R20	102V	SL	BSW	128210	7.0-(7.5)-8.5	34	11.2	29.7	10	1874	51	700
	265/50R20	107V	SL	BSW	128220	7.5-(8.5)-9.5	38	11.3	30.5	10.9	2149	51	682

*Performance claim based upon commissioned third-party test results. Snow braking test conducted on 255/55R18 tires from 30 to 0 mph. Individual results may vary.

Speed rated "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

ON-/OFF-ROAD COMMERCIAL GRADE TIRE

The Open Country C/T boasts all-terrain commercial grade durability, plus a Three-Peak Mountain Snowflake qualifies it for severe snow conditions. Developed for balanced on- and off-road work, its unique tread design and tough construction deliver long tread life and traction in gravel, mud, and snow. Contrary to its aggressive appearance, the Open Country C/T also provides a quiet, comfortable highway ride.

POPULAR FITMENTS

Chevrolet Silverado
Ford F-Series
Ram Series
Toyota Tundra
Nissan Titan



Three-Peak Mountain
Snowflake qualified for
severe snow conditions.

HIGH TURN-UP, 3-PLY
POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.

BALANCED TREAD COMPOUND

- Helps resist cutting, chipping, and stone drilling while remaining flexible in lower temperatures.
- Extends tire life and provides dependable year-round service.

DUAL-ANGLE SHOULDER BLOCKS

- Enhances traction in snow, mud, and rutted road conditions.

OPEN SHOULDER DESIGN

- Helps provide traction in mild mud, slush, and snow.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in ice traction.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
16	LT215/85R16	115/112Q	E	BSW	345220	5.5- (6.0) -7.0	46	17.0	30.4	8.5	2680	2470	80	683
	LT225/75R16	115/112Q	E	BSW	345180	(6.0) -7.0	45	17.0	29.3	8.8	2680	2470	80	709
	LT235/85R16	120/116Q	E	BSW	345160	6.0- (6.5) -7.5	55	18.3	31.7	9.3	3042	2778	80	655
	LT245/75R16	120/116Q	E	BSW	345050	6.5- (7.0) -8.0	51	18.3	30.7	9.8	3042	2778	80	676
	LT265/75R16	123/120Q	E	BSW	345170	7.0- (7.5) -8.0	57	18.4	31.7	10.5	3415	3085	80	656
	LT285/75R16	116/113Q	C	BSW	345190	7.5- (8.0) -9.0	62	18.4	32.8	11.3	2755	2535	50	633
17	LT225/75R17	116/113Q	E	BSW	345210	(6.0) -7.5	49	17.0	30.3	8.8	2755	2535	80	685
	LT235/80R17	120/117Q	E	BSW	345090	6.0- (6.5) -7.5	53	18.3	32.0	9.3	3085	2835	80	648
	LT245/70R17	119/116Q	E	BSW	345070	6.5- (7.0) -8.0	51	18.3	30.8	9.8	3000	2755	80	675
	LT245/75R17	121/118Q	E	BSW	345030	6.5- (7.0) -7.5	54	18.3	31.7	9.8	3195	2910	80	655
	LT265/70R17	121/118Q	E	BSW	345010	7.0- (8.0) -8.5	58	18.4	31.9	10.7	3195	2910	80	651
	LT285/70R17	121/118Q	E	BSW	345000	7.5- (8.5) -9.0	61	18.4	33.0	11.5	3195	2910	80	630
18	35X12.50R17LT	121Q	E	BSW	345120	8.5- (10.0) -11.0	77	19.3	34.8	12.5	3195	-	65	598
	LT265/70R18	124/121Q	E	BSW	345060	7.0- (8.0) -9.0	57	18.4	32.9	10.7	3525	3195	80	632
	LT275/65R18	123/120Q	E	BSW	345040	7.5- (8.0) -9.0	59	18.4	32.3	11.0	3415	3085	80	643
	LT275/70R18	125/122Q	E	BSW	345020	7.0- (8.0) -8.5	62	18.4	33.4	11.0	3640	3305	80	621
20	35X12.50R18LT	123Q	E	BSW	345130	8.5- (10.0) -11.0	79	19.3	34.8	12.5	3415	-	65	598
	LT265/60R20	121/118Q	E	BSW	345110	7.5- (8.0) -9.5	61	18.4	32.8	10.7	3195	2910	80	634
	LT275/55R20	115/112Q	D	BSW	345100	7.5- (8.5) -9.5	62	18.4	32.1	11.2	2680	2470	65	647
	LT275/65R20	126/123Q	E	BSW	345080	7.5- (8.0) -9.5	65	18.4	34.3	11.0	3750	3415	80	605
	LT285/55R20	122/119Q	E	BSW	345150	8.0- (9.0) -10.0	65	18.4	32.6	11.7	3305	3000	80	637
	LT285/60R20	125/122Q	E	BSW	345200	8.0- (8.5) -10.0	64	18.4	33.5	11.5	3640	3305	80	621
	35X12.50R20LT	121Q	E	BSW	345140	8.5- (10.0) -11.0	73	19.3	34.8	12.5	3195	-	65	598



Speed rated "Q" = 99 mph, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

OFF-ROAD COMMERCIAL GRADE TIRE

The iconic M-55 might be the hardest-working member of your crew. This commercial grade tire was built to handle the toughest of off-road jobs through snow, mud, and rough terrain. Its extreme durability and long tread life provide heavy-duty truck owners with dependable year-round service.

POPULAR FITMENTS

Chevrolet Silverado 2500
Ram Series
Ford F-250/F-350
Ford E-Series

AGGRESSIVE LUG AND BLOCK TREAD DESIGN

- Provides solid handling and traction.

OPEN SHOULDER DESIGN

- Maximizes water evacuation for excellent all-terrain traction and stability.

AGGRESSIVE SIPING

- Improves wet and snow traction.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in ice traction.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
15	LT215/75R15	100/97Q	C	BSW	309290	5.5- (6.0) -7.0	30	17.0	27.7	8.5	1765	1610	50	751
	LT235/75R15	104/101Q	C	BSW	309270	6.0- (6.5) -7.0	37	17.6	28.9	9.3	1985	1820	50	720
16	LT215/85R16	115/112Q	E	BSW	312270	5.5- (6.0) -7.0	43	17.0	30.7	8.7	2680	2470	80	676
	LT225/75R16	115/112Q	E	BSW	312350	(6.0) -7.0	40	17.0	29.4	8.7	2680	2470	80	705
	LT235/85R16	120/116Q	E	BSW	312290	6.0- (6.5) -7.5	49	17.5	32.0	9.3	3042	2770	80	650
	LT245/75R16	120/116Q	E	BSW	312330	6.5- (7.0) -8.0	46	17.5	30.8	9.8	3042	2778	80	675
	LT255/85R16	123/120Q	E	BSW	312230	6.5- (7.0) -8.0	59	18.1	33.4	10.4	3415	3085	80	622
	LT265/75R16	123/120Q	E	BSW	312250	7.0- (7.5) -8.0	58	18.3	32.0	10.8	3415	3085	80	649
17	LT285/75R16	126/123Q	E	BSW	312240	7.5- (8.0) -9.0	60	18.9	33.2	11.2	3740	3415	80	626
	LT235/80R17	120/117Q	E	BSW	312210	6.0- (6.5) -7.5	49	17.6	32.0	9.3	3085	2835	80	649
	LT245/75R17	121/118Q	E	BSW	312190	6.5- (7.0) -7.5	49	17.6	31.9	9.7	3195	2910	80	651
	LT265/70R17	121/118Q	E	BSW	312220	7.0- (8.0) -8.5	53	18.3	32.0	10.6	3195	2910	80	648
	LT285/70R17	121/118Q	E	BSW	301750	7.5- (8.5) -9.0	53	18.9	33.1	11.4	3195	2910	80	627
18	LT265/70R18	124/121Q	E	BSW	312200	7.0- (8.0) -9.0	57	18.3	33.0	10.6	3525	3195	80	629
	LT275/65R18	123/120Q	E	BSW	312300	7.5- (8.0) -9.0	57	18.9	32.4	11.0	3415	3085	80	640
	LT275/70R18	125/122Q	E	BSW	312310	7.0- (8.0) -8.5	60	18.8	33.6	11.0	3640	3305	80	619

Speed rated "Q" = 99mph, "M" = 81mph, "N" = 87 mph, "C" = 6-ply rating, "E" = 10-ply rating.
"BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

SPORTS CAR / COMPETITION

PROVE IT

SPORTS CAR

PROXES 1



MAX PERFORMANCE
SUMMER

DRY HANDLING	5.0
WET HANDLING	5.0
RIDE COMFORT	3.5
QUIET RIDE	4.5
TREAD LIFE	2.5
WINTER HANDLING	N/A
ROLLING RESISTANCE	3.0

UTQG

240 AA A

MILEAGE WARRANTY

--

VEHICLE & APPLICATION SEGMENT

Sports Cars
Direct OE Replacement

SPEED RATING

[Y]

WHEEL DIAMETER

18"-19"

PROXES R1R



EXTREME PERFORMANCE
SUMMER

DRY HANDLING	5.0
WET HANDLING	5.0
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	2.0
WINTER HANDLING	N/A
ROLLING RESISTANCE	2.0

UTQG

200 AA A

MILEAGE WARRANTY

--

VEHICLE & APPLICATION SEGMENT

Sports Cars
Autocross
Direct OE Replacement
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

15"-16"-17"-18"

PROXES T1 SPORT



ULTRA-HIGH PERFORMANCE
SUMMER

DRY HANDLING	4.5
WET HANDLING	5.0
RIDE COMFORT	3.0
QUIET RIDE	4.5
TREAD LIFE	3.0
WINTER HANDLING	N/A
ROLLING RESISTANCE	3.0

UTQG

240 AA A

MILEAGE WARRANTY

20,000 miles*

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
Direct OE Replacement
Plus Sizing

SPEED RATING

Y-[Y]

WHEEL DIAMETER

17"-18"-19"-20"

PROXES T1R



ULTRA-HIGH PERFORMANCE
SUMMER

DRY HANDLING	4.0
WET HANDLING	4.5
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	3.0
WINTER HANDLING	N/A
ROLLING RESISTANCE	3.0

UTQG

280 AA A

MILEAGE WARRANTY

--

VEHICLE & APPLICATION SEGMENT

Plus Sizing

SPEED RATING

V-W-Y

WHEEL DIAMETER

15"-16"-19"-20"-21"-22"

PROXES 4 PLUS



ULTRA-HIGH PERFORMANCE
ALL-SEASON

DRY HANDLING	4.0
WET HANDLING	4.5
RIDE COMFORT	4.0
QUIET RIDE	4.5
TREAD LIFE	4.0
WINTER HANDLING	3.0
ROLLING RESISTANCE	3.0

UTQG

560 A A

MILEAGE WARRANTY

Up to 50,000 miles*

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
Direct OE Replacement
Plus Sizing

SPEED RATING

V-W-Y

WHEEL DIAMETER

16"-17"-18"-19"-20"

SPORTS CAR:

These high performance tires are built for spirited driving. Advanced technologies in compounds and design deliver exceptional wet and dry handling, high-speed stability, and longer tread life. If that isn't enough, most of these tires are backed by our risk-free No Regrets Trial Offer.



*Performance Ratings are on a scale of 1 to 5 (best) in 0.5-point increments and can be compared within applicable Toyo product categories.

MAX PERFORMANCE SUMMER TIRE

Built for many of the most powerful cars in the world, this max performance summer tire is the flagship for our legendary Proxes line of high performance products. The Proxes 1 is also our most technologically advanced tire, developed with a focus on high-speed performance, cornering, and braking.

POPULAR FITMENTS

BMW M3
BMW M5
Chevrolet Corvette
Porsche Cayman S
Porsche 911 Carrera Turbo

UTQG

240 AA A



TRUFORM™ TECHNOLOGY

- Reduces tread deformation for better steering response and high-speed stability.
- Improves handling performance.

MULTI-COMPOUND TREAD

- Outside: Engineered for cornering performance.
- Inside: Engineered for braking performance.

UNIQUE TREAD COMPOUND AND DESIGN: REAR SIZES (285 AND WIDER)

- Improves cornering power.
- Improves vehicle balance.

MULTI-FUNCTION TAPER

- Obtains uniform contact pressure during cornering.
- Provides a wide water channel for better hydroplaning resistance.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
18	235/40ZR18	(91Y)	SL	BSW	100500	8.0- (8.5) -9.5	25	9.7	25.4	9.7	1356	51	817
	245/40ZR18	(93Y)	SL	BSW	100580	8.0- (8.5) -9.5	26	9.7	25.7	9.8	1433	51	808
	265/40ZR18	(101Y)	XL	BSW	100510	9.0- (9.5) -10.5	29	9.7	26.3	10.8	1819	50	789
	295/35ZR18	(99Y)	SL	BSW	100520	10.0- (10.5) -11.5	32	9.1	26.2	11.9	1709	51	793
19	235/35ZR19	(87Y)	SL	BSW	100540	8.0- (8.5) -9.5	25	9.7	25.6	9.7	1201	51	813
	255/35ZR19	(96Y)	XL	BSW	100590	8.5- (9.0) -10.0	27	9.7	26.1	10.2	1565	50	796
	255/40ZR19	(96Y)	SL	BSW	100530	8.5- (9.0) -10.0	29	9.7	27.1	10.2	1565	51	767
	285/35ZR19	(99Y)	SL	BSW	100550	9.5- (10.0) -11.0	32	9.1	26.9	11.5	1709	51	773
	295/30ZR19	(100Y)	XL	BSW	100560	10.0- (10.5) -11.0	31	9.1	26.1	12	1764	50	796
	305/30ZR19	(102Y)	XL	BSW	100570	10.5- (11.0) -11.5	33	9.1	26.3	12.3	1874	50	790

Speed rated "[Y]" = 195mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width.**Inflated dimensions.

EXTREME PERFORMANCE SUMMER TIRE

Years of grueling on-track experience and advanced engineering shine through in this extreme-performance summer tire. The Proxes R1R helps you drive hard through the corners and quickly accelerate in the straightaways. Features include an aggressive, arrowhead tread design, extra wide footprint, high-grip compound, and autocross-inspired casing design.

POPULAR FITMENTS

BMW 3-Series
Honda S2000
Porsche Boxster
Subaru WRX STi
Mitsubishi Lancer Evolution

UTQG

200 AA A

SILICA-REINFORCED,
HIGH-GRIP TREAD COMPOUND

- Improves grip for better handling performance during high-spirited driving.

TAPERED CENTER BLOCK EDGE

- Stabilizes center block movement to decrease irregular wear.
- Helps to increase hydroplaning resistance.

ADVANCED AUTOCROSS-
INSPIRED CASING WITH MODIFIED
RADIAL CONSTRUCTION

- Improves steering response and handling.

STABILITY CONTROL SLITS

- Provides resistance to irregular wear.
- Improves dry performance by maintaining block stiffness during aggressive braking.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/50R15	82V	SL	BSW	173370	5.5- (6.0) -7.0	20	8.2	22.8	7.8	1047	51	910
	195/55R15	85V	SL	BSW	173260	5.5- (6.0) -7.0	20	8.4	23.5	8.1	1135	51	883
	195/55R15	85V	SL	BSW	170270	5.5- (6.0) -7.0	20	8.4	23.5	8.1	1135	51	883
	205/50R15	86V	SL	BSW	173330	5.5- (6.5) -7.5	20	8.2	23	8.5	1168	51	903
	225/45ZR15	87W	SL	BSW	173280	7.0- (7.5) -8.5	22	8.1	23	8.9	1201	51	905
16	205/45R16	83W	SL	BSW	173360	6.5- (7.0) -7.5	19	8.2	23.2	8.1	1074	51	894
	205/45R16	83W	SL	BSW	170040	6.5- (7.0) -7.5	19	8.2	23.2	8.1	1074	51	894
	205/50R16	87V	SL	BSW	173350	5.5- (6.5) -7.5	22	8.6	24.3	8.4	1201	51	856
	205/50R16	87V	SL	BSW	170260	5.5- (6.5) -7.5	22	8.6	24.3	8.4	1201	51	856
	205/55R16	91V	SL	BSW	145020	5.5- (6.5) -7.5	22	8.6	24.8	8.1	1356	51	838
	225/45ZR16	89W	SL	BSW	145040	7.0- (7.5) -8.5	23	8.1	23.9	9	1279	51	871
	225/50R16	92V	SL	BSW	145010	6.0- (7.0) -8.0	23	8.8	24.8	9	1389	51	838
	225/50R16	92V	SL	BSW	170250	6.0- (7.0) -8.0	23	8.8	24.8	9	1389	51	838
	215/45ZR17	87W	SL	BSW	173340	(7.0) -8.0	22	7.9	24.5	8.3	1201	51	847
17	225/45ZR17	91W	SL	BSW	145070	7.0- (7.5) -8.5	24	8.1	25	8.9	1356	51	832
	235/40ZR17	90W	SL	BSW	173210	8.0- (8.5) -9.5	24	8.2	24.4	9.4	1323	51	850
	235/45ZR17	94W	SL	BSW	145050	7.5- (8.0) -9.0	24	8.2	25.3	9.4	1477	51	820
	245/35ZR17	91W	XL	BSW	173220	8.0- (8.5) -9.5	24	8.2	23.8	9.7	1356	50	872
	245/40ZR17	91W	SL	BSW	173240	8.0- (8.5) -9.5	24	8.2	24.7	9.8	1356	51	840
	245/40ZR17	91W	SL	BSW	170160	8.0- (8.5) -9.5	24	8.2	24.7	9.8	1356	51	840
	245/45ZR17	95W	SL	BSW	145080	7.5- (8.0) -9.0	28	8.2	26	9.7	1521	51	799
	255/40ZR17	94W	SL	BSW	145060	8.5- (9.0) -10.0	26	8.2	25.2	10.3	1477	51	825
	275/40ZR17	98W	SL	BSW	145110	9.0- (9.5) -11.0	27	8.2	25.6	10.8	1653	51	811
	225/40ZR18	88W	SL	BSW	173190	7.5- (8.0) -9.0	23	8.2	25	9	1235	51	830
18	245/40ZR18	93W	SL	BSW	173250	8.0- (8.5) -9.5	25	8.2	26	9.6	1433	51	800
	255/35ZR18	90W	SL	BSW	145090	8.5- (9.0) -10.0	24	8.2	25.1	10.1	1323	51	828
	265/35ZR18	93W	SL	BSW	170070	9.0- (9.5) -10.5	26	8.2	25.4	10.6	1433	51	817
	265/35ZR18	93W	SL	BSW	173230	9.0- (9.5) -10.5	26	8.2	25.4	10.6	1433	51	817

Speed rated "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

ULTRA-HIGH PERFORMANCE SUMMER TIRE

The Proxes T1 Sport delivers increased control and precision for true balance in both wet and dry handling. State-of-the-art design and construction provide the perfect mix of high-speed stability and cornering power, precise steering response, and quick braking on wet or dry pavement. This ultra-high performance summer tire also comes with up to a 20,000-mile treadwear warranty, rare for its segment.

MILEAGE WARRANTY*
20,000 miles

POPULAR FITMENTS
BMW 1-Series
BMW Z4
Ford Mustang GT
Mercedes-Benz C63 AMG
Nissan 370Z

UTQG
240 AA A



OUTSIDE TREAD: WIDER AND MORE EVEN CONTACT PRESSURE

- Gives better cornering performance.

INSIDE TREAD: WIDE GROOVES AND RIGID RIB-BASED DESIGN

- Enhances braking performance.
- Helps prevent hydroplaning.

HIGH STIFFNESS SIDEWALL AND HIGH HARDNESS BEAD FILLER

- Quicker and more linear steering response as compared to Proxes T1R.

WIDE PROFILE DESIGN

- Improves contact pressure distribution for better cornering and braking performance as compared to Proxes T1R.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	205/50ZR17	93Y	XL	BSW	252380	5.5-(6.5)-7.5	22	10.1	25	8.4	1433	50	830
	225/45ZR17	94Y	XL	BSW	252350	7.0-(7.5)-8.5	25	10.1	24.8	9.1	1477	50	836
	235/40ZR17	94Y	XL	BSW	252300	8.0-(8.5)-9.5	23	9.6	24.2	9.6	1477	50	857
	235/45ZR17	97Y	XL	BSW	252360	7.5-(8.0)-9.0	24	10.1	25.2	9.4	1609	50	826
	245/40ZR17	95Y	XL	BSW	252310	8.0-(8.5)-9.5	24	10.1	24.6	9.8	1521	50	844
	245/45ZR17	99Y	XL	BSW	252370	7.5-(8.0)-9.0	27	10.1	25.5	9.7	1709	50	814
	255/40ZR17	98Y	XL	BSW	252320	8.5-(9.0)-10.0	26	10.1	24.9	10.2	1653	50	834
	265/40ZR17	96Y	SL	BSW	252330	9.0-(9.5)-10.5	26	10.1	25.2	10.7	1565	51	826
18	215/40ZR18	89Y	XL	BSW	252190	7.0-(7.5)-8.5	22	10.1	24.8	8.5	1279	50	839
	215/45ZR18	93Y	XL	BSW	252240	(7.0)-8.0	22	10.1	25.5	8.5	1433	50	816
	225/40ZR18	92Y	XL	BSW	252200	7.5-(8.0)-9.0	25	9.6	25.1	9.1	1389	50	829
	225/45ZR18	(95Y)	XL	BSW	252250	7.0-(7.5)-8.5	24	10.1	25.9	9	1521	50	803
	235/40ZR18	(95Y)	XL	BSW	252210	8.0-(8.5)-9.5	25	9.6	25.2	9.6	1521	50	823
	235/45ZR18	(98Y)	XL	BSW	252260	7.5-(8.0)-9.0	27	10.1	26.2	9.3	1653	50	793
	235/50ZR18	101Y	XL	BSW	252290	6.5-(7.5)-8.5	29	10.1	27.2	9.7	1819	50	765
	245/35ZR18	92Y	XL	BSW	252140	8.0-(8.5)-9.5	23	10.1	24.6	9.6	1389	50	843
	245/40ZR18	97Y	XL	BSW	252220	8.0-(8.5)-9.5	27	9.7	25.7	9.7	1609	50	809
	245/45ZR18	(100Y)	XL	BSW	252270	(8.0)-9.5	28	10.1	26.6	9.7	1764	50	782
	255/35ZR18	94Y	XL	BSW	252150	8.5-(9.0)-10.0	26	10.1	24.9	10.1	1477	50	835
	255/40ZR18	(99Y)	XL	BSW	252230	8.5-(9.0)-10.0	27	10.1	25.9	10.2	1709	50	802
	255/45ZR18	103Y	XL	BSW	252280	8.0-(8.5)-9.5	28	10.1	26.9	10.2	1929	50	771
	265/35ZR18	(97Y)	XL	BSW	252160	9.0-(9.5)-10.5	25	10.1	25.3	10.6	1609	50	821
	275/35ZR18	(95Y)	SL	BSW	252170	9.0-(9.5)-11.0	27	10.1	25.5	10.8	1521	51	816
	275/40ZR18	(99Y)	SL	BSW	252510	9.0-(9.5)-11.0	30	10.1	26.7	11	1709	51	778
19	285/30ZR18	97Y	XL	BSW	252500	9.5-(10.0)-10.5	27	9.4	24.8	11.2	1609	50	838
	285/35ZR18	101Y	XL	BSW	252180	9.5-(10.0)-11.0	32	9.4	25.7	11.6	1819	50	807
	295/35ZR18	(103Y)	XL	BSW	252950	10.0-(10.5)-11.5	34	9.1	26.1	11.9	1929	50	796
	225/35ZR19	(88Y)	XL	BSW	252060	7.5-(8.0)-9.0	22	10.1	25.2	9.1	1235	50	823
	225/40ZR19	93Y	XL	BSW	252100	7.5-(8.0)-9.0	24	10.1	26.2	9.1	1433	50	793
	235/35ZR19	(91Y)	XL	BSW	252070	8.0-(8.5)-9.5	23	10.1	25.4	9.5	1356	50	819
	235/40ZR19	96Y	XL	BSW	252850	8.0-(8.5)-9.5	25	9.2	26.4	9.5	1565	50	786
	245/35ZR19	(93Y)	XL	BSW	252080	8.0-(8.5)-9.5	25	10.1	25.7	9.6	1433	50	809
	245/40ZR19	(98Y)	XL	BSW	252110	8.0-(8.5)-9.5	27	10.1	26.6	9.8	1653	50	781
	245/45R19	102Y	XL	BSW	252770	7.5-(8.0)-9.0	30	9.7	27.7	9.6	1874	50	751
	255/30ZR19	(91Y)	XL	BSW	252030	8.5-(9.0)-9.5	26	10.1	25	10	1356	50	830
	255/35ZR19	(96Y)	XL	BSW	252090	8.5-(9.0)-10.0	26	10	25.9	10.1	1565	50	801
	255/40ZR19	100Y	XL	BSW	252120	8.5-(9.0)-10.0	28	10.1	26.9	10.2	1764	50	771
	265/30ZR19	(93Y)	XL	BSW	252040	9.0-(9.5)-10.0	26	10.1	25.2	10.6	1433	50	824
	265/35ZR19	(98Y)	XL	BSW	252470	9.0-(9.5)-10.5	27	9.2	26.3	10.7	1653	50	790
	275/30ZR19	(96Y)	XL	BSW	252530	9.0-(9.5)-10.0	26	10.1	25.6	10.6	1565	50	810
20	275/35ZR19	(100Y)	XL	BSW	252540	9.0-(9.5)-11.0	29	10.1	26.6	10.9	1764	50	780
	275/40ZR19	105Y	XL	BSW	252840	9.0-(9.5)-11.0	31	9.7	27.7	10.9	2039	50	751
	285/30ZR19	(98Y)	XL	BSW	252520	9.5-(10.0)-10.5	29	9.4	25.8	11.3	1653	50	806
	285/35ZR19	(99Y)	SL	BSW	252780	9.5-(10.0)-11.0	33	9.1	26.9	11.4	1709	51	773
	295/30ZR19	(100Y)	XL	BSW	252050	10.0-(10.5)-11.0	32	9.4	26.1	11.9	1764	50	795
	325/30ZR19	(105Y)	XL	BSW	252790	11.0-(11.5)-12.0	36	9.1	26.7	13	2039	50	777
	235/30ZR20	(88Y)	XL	BSW	252590	8.5	23	10.1	25.7	9.4	1235	50	808
	245/30ZR20	(90Y)	XL	BSW	252570	8.0-(8.5)-9.0	23	10.1	25.9	9.7	1323	50	803
	245/35ZR20	(95Y)	XL	BSW	252580	8.0-(8.5)-9.5	25	10.1	26.8	9.7	1521	50	776
	245/40ZR20	99Y	XL	BSW	252960	8.0-(8.5)-9.5	28	9.7	27.7	9.8	1709	50	749
	245/45ZR20	103Y	XL	BSW	252820	7.5-(8.0)-9.0	31	9.7	28.7	9.6	1929	50	725
	255/30ZR20	(92Y)	XL	BSW	252000	8.5-(9.0)-9.5	25	10.1	26	10	1389	50	799
	255/35ZR20	(97Y)	XL	BSW	252020	8.5-(9.0)-10.0	28	10.1	27	10.1	1609	50	770
	255/40ZR20	(101Y)	XL	BSW	252800	8.5-(9.0)-10.0	30	9.7	28	10.2	1819	50	741
	275/30ZR20	(97Y)	XL	BSW	252560	9.0-(9.5)-10.0	28	10.1	26.7	10.6	1609	50	779
	275/35ZR20	(102Y)	XL	BSW	252490	9.0-(9.5)-11.0	28	10.1	27.7	10.7	1874	50	751
	275/40ZR20	106Y	XL	BSW	252830	9.0-(9.5)-11.0	33	9.7	28.7	10.9	2094	50	725
	285/30ZR20	(99Y)	XL	BSW	252550	9.5-(10.0)-10.5	31	9.4	26.9	11.2	1709	50	773
	285/35ZR20	(100Y)	SL	BSW	100450	9.5-(10.0)-11.0	37	9.1	27.9	11.4	1764	51	745
	305/25ZR20	(97Y)	XL	BSW	252810	10.5-(11.0)-11.5	35	9.4	26	12.3	1609	50	799
	325/25ZR20	(101Y)	XL	BSW	252880	11.5-(12.0)-12.5	35	9.1	26.4	13.2	1819	50	788

Speed rated "Y" = 186mph, "V" = 195mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

ULTRA-HIGH PERFORMANCE SUMMER TIRE

The Proxes T1R is an ultra-high performance summer tire designed for sport sedans and coupes. A refined tread design and construction offer improved dry and wet handling as well as performance.

POPULAR FITMENTS

Audi A7
Cadillac CTS-V
Chevrolet Corvette
Jaguar XKR
Lexus GS 450

UTQG

280 A A



SILICA-REINFORCED,
HIGH-GRIP TREAD COMPOUND

- Improves wet performance.
- Delivers exceptional dry performance.

REFINED UNIDIRECTIONAL
TREAD DESIGN

- Provides exceptional dry and wet performance with a classic design.

V-SHAPED MAIN GROOVES

- Disperses water for better wet performance and aquaplaning.

RIGID SHOULDER RIB-BANDS

- Improves cornering for exceptional dry performance.
- Reduces irregular wear for a smooth, quiet ride.

PARALLEL SHOULDER SLITS

- Helps reduce irregular wear.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	185/55R15	82V	SL	BSW	241150	5.0-(6.0)-6.5	16	10.6	23	7.6	1047	44	903
	195/45R15	78V	SL	BSW	250760	6.0-(6.5)-7.5	16	10.3	22	7.7	937	44	946
16	195/55R16	91V	RD	BSW	241070	5.5-(6.0)-7.0	18	10.6	24.3	7.9	1356	50	854
	205/55ZR16	91W	SL	BSW	250860	5.5-(6.5)-7.5	22	10.6	24.9	8.4	1356	44	835
	225/50ZR16	92W	SL	BSW	250790	6.0-(7.0)-8.0	22	10.6	24.7	9.2	1389	44	840
	245/45ZR16	94W	SL	BSW	250640	7.5-(8.0)-9.0	22	10.3	24.6	9.6	1477	44	844
19	235/35ZR19	91Y	RD	BSW	251630	8.0-(8.5)-9.5	22	10.3	25.5	9.5	1356	50	814
	255/35ZR19	96Y	RD	BSW	241210	8.5-(9.0)-10.0	25	10.3	26	10.1	1565	50	798
	275/30ZR19	96Y	RD	BSW	251590	9.0-(9.5)-10.0	26	10.3	25.6	10.6	1565	50	812
	315/25ZR19	98Y	SL	BSW	241290	11.0-(11.5)-12.0	30	10.3	25.2	12.8	1653	50	823
20	245/30ZR20	90Y	RD	BSW	251520	8.0-(8.5)-9.0	24	10.3	25.9	9.5	1323	50	801
	255/30ZR20	92Y	RD	BSW	251510	8.5-(9.0)-9.5	25	10.3	26.1	10	1389	50	796
	255/35ZR20	97Y	RD	BSW	251550	8.5-(9.0)-10.0	27	10.3	27	10.2	1609	50	769
	275/30ZR20	97Y	RD	BSW	251500	9.0-(9.5)-10.0	26	10.3	26.6	10.6	1609	50	782
	285/25ZR20	93Y	RD	BSW	240410	(10.5)	31	10.3	25.6	11.6	1433	50	812
	305/25ZR20	97Y	RD	BSW	240930	10.5-(11.0)-11.5	29	10.3	26	12.2	1609	50	799
	305/30ZR20	103Y	RD	BSW	240490	10.5-(11.0)-11.5	34	10.3	27.2	12.3	1929	50	763
	315/25ZR20	99Y	RD	BSW	250580	11.0-(11.5)-12.0	33	10.3	26.3	12.6	1709	50	789
21	345/25ZR20	104Y	RD	BSW	251400	12.0-(12.5)-13.0	36	10.3	26.8	13.6	1984	50	776
	255/30ZR21	93Y	RD	BSW	240780	8.5-(9.0)-9.5	26	10.3	27.1	10.2	1433	50	767
	285/30ZR21	100Y	RD	BSW	240510	9.5-(10.0)-10.5	30	10.3	27.8	11.2	1764	50	747
	295/25ZR21	96Y	RD	BSW	240330	10.0-(10.5)-11.0	30	10.3	27	11.7	1565	50	770
22	255/30ZR22	95Y	RD	BSW	240770	8.5-(9.0)-9.5	30	10.3	28.1	10.2	1521	50	740
	265/30R22	97Y	XL	BSW	246740	9.0-(9.5)-10.0	32	10.3	28.3	10.7	1609	50	734
	285/25ZR22	95Y	RD	BSW	240370	(10.5)	31	10.3	27.6	11.4	1521	50	753
	295/25ZR22	97Y	RD	BSW	240940	10.0-(10.5)-11.0	32	10.3	27.9	11.5	1609	50	745

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph. "SL" = Standard Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.



ULTRA-HIGH PERFORMANCE ALL-SEASON TIRE

The Proxes 4 Plus is the perfect match for high-horsepower sports cars, delivering exceptional all-season performance and a quiet ride throughout the life of the tire. It also offers excellent tread life and a competitive mileage warranty. This ultra-high performance all-season tire is available in a wide range of sizes and is backed by the Toyo Tires No Regrets Trial Offer.

MILEAGE WARRANTY*

V/W-rated: 50,000 miles
Y-rated: 45,000 miles

POPULAR FITMENTS

Chevrolet Camaro
Dodge Challenger
Ford Mustang
Hyundai Genesis Coupe
Nissan 370Z

UTQG
560 A A

HIGH-GRIP SILICA TREAD COMPOUND

- Delivers exceptional braking and handling in wet and dry conditions.
- Delivers longer tread life.

PROXES 4 PLUS

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves light snow traction.

OUTSIDE TREAD: WIDE RIBS AND CLOSED SHOULDER

- Improves vehicle responsiveness.
- Improves cornering performance.

INSIDE TREAD: WIDE GROOVES AND HIGH SIPE DENSITY

- Improves braking and acceleration.
- Maximizes wet and snow evacuation.



	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
16		195/50R16	84W	SL	BSW	254580	5.5- (6.0) -7.0	19.2	10.3	23.7	7.9	1102	51	876
		205/50R16	91V	XL	BSW	254010	5.5- (6.5) -7.5	20.9	10.7	24	8.5	1356	50	865
		205/55R16	94V	XL	BSW	254000	5.5- (6.5) -7.5	23	10.7	24.7	8.6	1477	50	840
17		205/40R17	84W	XL	BSW	254230	7.0- (7.5) -8.0	20	10.3	23.5	8.5	1102	50	882
		205/45R17	88W	XL	BSW	254590	6.5- (7.0) -7.5	21	10.3	24.3	8.1	1235	50	857
		205/50R17	93W	XL	BSW	254020	5.5- (6.5) -7.5	22	10.3	25.1	8.5	1433	50	827
		215/45R17	91W	XL	BSW	254090	(7.0) -8.0	23	10.3	24.6	8.4	1356	50	843
		215/50R17	95W	XL	BSW	254030	6.0- (7.0) -7.5	25	10.3	25.4	8.9	1521	50	818
		215/55R17	94W	SL	BSW	254650	6.0- (7.0) -7.5	26	10.3	26.3	8.9	1477	51	790
		225/45R17	94W	XL	BSW	254100	7.0- (7.5) -8.5	24	10.3	25	8.9	1477	50	831
		225/50R17	98W	XL	BSW	254040	6.0- (7.0) -8.0	26	10.3	25.9	9.4	1653	50	803
		225/55R17	97W	SL	BSW	254600	6.0- (7.0) -8.0	27	10.3	26.8	9.2	1609	51	776
		235/45R17	97W	XL	BSW	254110	7.5- (8.0) -9.0	26	10.3	25.3	9.5	1609	50	821
		235/50R17	100W	XL	BSW	254050	6.5- (7.5) -8.5	28	10.3	26.3	9.8	1764	50	789
		235/55R17	99W	SL	BSW	254610	6.5- (7.5) -8.5	27	10.3	27.2	9.6	1709	51	765
		245/40R17	95W	XL	BSW	254240	8.0- (8.5) -9.5	25	10.3	24.8	9.9	1521	50	837
		245/45R17	99W	XL	BSW	254120	7.5- (8.0) -9.0	26	10.3	25.8	9.8	1709	50	806
		255/40R17	98W	XL	BSW	254250	8.5- (9.0) -10.0	26	10.3	25	10.3	1653	50	832
		275/40R17	98W	SL	BSW	254620	9.0- (9.5) -11.0	27	10.3	25.7	10.9	1653	51	809
18		215/45R18	93W	XL	BSW	254130	(7.0) -8.0	23	10.3	25.6	8.4	1433	50	811
		225/40R18	92Y	XL	BSW	254260	7.5- (8.0) -9.0	22	10	25.1	8.9	1389	50	827
		225/45R18	95W	XL	BSW	254140	7.0- (7.5) -8.5	26	10.3	26	9	1521	50	800
		225/50R18	95W	SL	BSW	254060	6.0- (7.0) -8.0	28	10.3	26.9	9.2	1521	51	773
		235/40R18	95Y	XL	BSW	254270	8.0- (8.5) -9.5	23	10	25.5	9.5	1521	50	815
		235/45R18	98W	XL	BSW	254150	7.5- (8.0) -9.0	28	10.3	26.3	9.3	1653	50	789
		235/50R18	101W	XL	BSW	254070	6.5- (7.5) -8.5	30	10.3	27.3	9.6	1819	50	761
		245/40R18	97Y	XL	BSW	254280	8.0- (8.5) -9.5	26	10	25.9	9.7	1609	50	802
		245/45R18	100W	XL	BSW	254160	7.5- (8.0) -9.0	28	10.3	26.7	9.7	1764	50	779
		255/35R18	94Y	XL	BSW	254360	8.5- (9.0) -10.0	25	10	25	10.2	1477	50	831
		255/40R18	99Y	XL	BSW	254290	8.5- (9.0) -10.0	27	10	26	10.2	1709	50	799
		255/45R18	103Y	XL	BSW	254170	8.0- (8.5) -9.5	29	10	27	10	1929	50	768
		265/35R18	97W	XL	BSW	254630	9.0- (9.5) -10.5	26	10.3	25.3	10.7	1609	50	821
		275/35R18	99Y	XL	BSW	254370	9.0- (9.5) -11.0	27	10	25.6	10.9	1709	50	813
		285/35R18	101Y	XL	BSW	254380	9.5- (10.0) -11.0	31	10	25.9	11.4	1819	50	803
19		225/35R19	88Y	XL	BSW	254390	7.5- (8.0) -9.0	23	10	25.2	9.1	1235	50	823
		225/40R19	93Y	XL	BSW	254300	7.5- (8.0) -9.0	24	10	26.1	9.1	1433	50	796
		225/45R19	96W	XL	BSW	254180	7.0- (7.5) -8.5	27	10.3	27.1	9	1565	50	767
		235/35R19	91Y	XL	BSW	254400	8.0- (8.5) -9.5	25	10	25.5	9.5	1356	50	816
		235/40R19	96Y	XL	BSW	254660	8.0- (8.5) -9.5	27	10	26.4	9.5	1565	50	786
		245/35R19	93Y	XL	BSW	254410	8.0- (8.5) -9.5	27	10	25.8	9.8	1433	50	806
		245/40R19	98Y	XL	BSW	254310	8.0- (8.5) -9.5	27	10	26.7	9.8	1653	50	777
		245/45R19	102Y	XL	BSW	254190	7.5- (8.0) -9.0	29	10	27.7	9.6	1874	50	749
		245/50R19	105W	XL	BSW	254080	7.0- (7.5) -8.5	31	10.7	28.7	10	2039	50	724
		255/30R19	91Y	XL	BSW	254480	8.5- (9.0) -9.5	24	10	25.1	10.2	1356	50	828
		255/35R19	96Y	XL	BSW	254420	8.5- (9.0) -10.0	28	10	26	10.2	1565	50	798
		255/40R19	100Y	XL	BSW	254320	8.5- (9.0) -10.0	28	10	27	10.2	1764	50	768
		255/45R19	104W	XL	BSW	254200	8.0- (8.5) -9.5	30	10.3	28.1	10	1984	50	740
		265/30R19	93Y	XL	BSW	254490	9.0- (9.5) -10.0	25	10	25.3	10.7	1433	50	821
		275/30R19	96Y	XL	BSW	254500	9.0- (9.5) -10.0	27	10	25.6	10.6	1565	50	811
		275/35R19	100Y	XL	BSW	254430	9.0- (9.5) -11.0	29	10	26.6	10.9	1764	50	782
		275/40R19	105Y	XL	BSW	254330	9.0- (9.5) -11.0	33	10	27.8	10.9	2039	50	748
		295/30R19	100Y	XL	BSW	254510	10.0- (10.5) -11.0	29	10	26	11.9	1764	50	798

	WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
20		225/30R20	85W	XL	BSW	254520	(8.0)	22	10.3	25.4	9.1	1135	50	819
		225/35R20	90W	XL	BSW	254440	7.5- (8.0) -9.0	25	10.3	26.3	9	1323	50	791
		235/30R20	88W	XL	BSW	254530	(8.5)	23	10.3	25.6	9.5	1235	50	812
		245/35R20	95W	XL	BSW	254450	8.0- (8.5) -9.5	29	10.3	26.8	9.8	1521	50	776
		245/40R20	99W	XL	BSW	254340	8.0- (8.5) -9.5	29	10.3	27.7	9.8	1709	50	749
		245/45R20	103Y	XL	BSW	254210	7.5- (8.0) -9.0	30	10.0	28.7	9.6	1929	50	725
		255/30R20	92W	XL	BSW	254540	8.5- (9.0) -9.5	27	10.3	26.1	10.2	1389	50	797
		255/35R20	97Y	XL	BSW	254460	8.5- (9.0) -10.0	28	10.0	27.1	10	1609	50	767
		255/45R20	105Y	XL	BSW	254220	8.0- (8.5) -9.5	32	10.0	29.1	10	2039	50	715
		275/30R20	97Y	XL	BSW	254550	9.0- (9.5) -10.0	28	10.0	26.5	10.9	1609	50	783
		275/35R20	102Y	XL	BSW	254470	9.0- (9.5) -11.0	31	10.0	27.6	10.9	1874	50	754
		275/40R20	106Y	XL	BSW	254350	9.0- (9.5) -11.0	33	10.0	28.7	10.9	2094	50	725
		295/25R20	95Y	XL	BSW	254570	10.0- (10.5) -11.0	28	10.0	25.6	11.7	1521	50	812
		295/30R20	101Y	XL	BSW	254560	10.0- (10.5) -11.0	31	10.0	27	11.9	1819	50	769
		315/35R20	110Y	XL	BSW	254640	10.5- (11.0) -12.5	36	10.0	28.7	12.6	2337	50	725

COMPETITION

PROXES R888R



DOT COMPETITION

DRY PERFORMANCE	4.5
WET PERFORMANCE	4.0
BRAKING	4.5
TREAD LIFE	4.5

UTQG
100 AA A

VEHICLE & APPLICATION SEGMENT
Road Racing
Race-Prepared Vehicles
High Performance Street

WHEEL DIAMETER
13"-14"-15"-16"-17"-18"-19"-20"

PROXES R888



DOT COMPETITION

DRY PERFORMANCE	4.0
WET PERFORMANCE	4.5
BRAKING	4.5
TREAD LIFE	4.5

UTQG
100 AA A

VEHICLE & APPLICATION SEGMENT
Road Racing
Race-Prepared Vehicles
High Performance Street

WHEEL DIAMETER
13"-14"-15"-16"-17"-18"-19"-20"

PROXES RR



DOT COMPETITION

DRY PERFORMANCE	4.5
WET PERFORMANCE	N/A
BRAKING	4.5
TREAD LIFE	4.0

UTQG
40 C A

VEHICLE & APPLICATION SEGMENT
Road Racing
Endurance Racing
Race-Prepared Vehicles

WHEEL DIAMETER
13"-15"-16"-17"-18"

PROXES RA1



DOT COMPETITION

DRY PERFORMANCE	3.5
WET PERFORMANCE	5.0
BRAKING	4.5
TREAD LIFE	5.0

UTQG
100 AA A

VEHICLE & APPLICATION SEGMENT
Road Racing
Race-Prepared Vehicles
High Performance Street

WHEEL DIAMETER
13"-15"-16"-17"-18"

PROXES RS1



FULL-SLICK COMPETITION

DRY PERFORMANCE	5.0
WET PERFORMANCE	N/A
BRAKING	5.0
TREAD LIFE	4.0

UTQG
--

VEHICLE & APPLICATION SEGMENT
Road Racing
Endurance Racing
Race-Prepared Vehicles

WHEEL DIAMETER
18"

PROXES TQ



DOT DRAG RADIAL

DRY PERFORMANCE	4.5
WET PERFORMANCE	N/A
BRAKING	4.5
TREAD LIFE	4.5

UTQG
00 B B

VEHICLE & APPLICATION SEGMENT
Drag Racing

WHEEL DIAMETER
16"-17"-18"

COMPETITION:
Made for the track, these tires are engineered to win. From road racing to track days and high performance driving schools, Toyo Tires has been a staple in U.S. racing for over 25 years. You'll find them as the spec tire for several classes in NASA and PCA Club Racing.



Performance Ratings are on a scale of 1 to 5 (best) in 0.5-point increments and can be compared within applicable Toyo product categories.

DOT COMPETITION TIRE

The Proxes R888R is an evolution of the race-winning Proxes R888, delivering even faster lap times and better dry handling. The credit goes to a new tread design and an improved contact patch that puts more rubber on the track. Racers will also appreciate the predictable handling and how quickly the Proxes R888R reaches optimal operating temperature.

*Caution: Recommended for competition events only.

POPULAR FITMENTS

BMW 3-Series
BMW 4-Series
Chevrolet Corvette
Porsche Cayman
Porsche 911

UTQG

100 AA A

HIGH-GRIP RACE COMPOUND

- Reaches optimal operating temperature quickly and provides consistent performance.
- Improves grip for excellent cornering performance.

OPTIMIZED CONTACT PATCH

- Improves dry traction in braking, acceleration, and cornering.

LARGE TREAD BLOCKS ON OUTSIDE TREAD

- Maximizes lateral grip for improved cornering.

WIDE CENTER RIB

- Improves directional stability and precise steering response.

WATER EVACUATION CHANNEL

- Assists with wet traction.

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES R888R:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: 32 to 38 (psi)
- Camber: -1° to -3°
- Caster: As much positive as possible



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	185/60R13	80V	SL	BSW	103180	5.0- (5.5) -6.5	17	6.3	21.7	7.4	992	51	956
	205/60R13	86V	SL	BSW	103200	5.5- (6.0) -7.5	20	6.3	22.7	8.2	1168	51	916
	225/45R13	84V	SL	BSW	104530	7.0- (7.5) -8.5	19	6.3	20.9	8.9	1102	51	992
14	185/60R14	82V	SL	BSW	103190	5.0- (5.5) -6.5	19	6.3	22.8	7.4	1047	51	913
	195/50R15	82V	SL	BSW	102740	5.5- (6.0) -7.0	19	6.3	22.7	7.9	1047	51	914
	195/55R15	85V	SL	BSW	103520	5.5- (6.0) -7.0	20	6.3	23.4	7.9	1135	51	887
15	205/60ZR15	86W	SL	BSW	103210	5.5- (6.5) -7.5	21	6.3	23.1	8.4	1168	51	899
	225/45ZR15	87W	SL	BSW	104470	7.0- (7.5) -8.5	21	6.3	23	8.9	1201	51	905
	225/50ZR15	91W	SL	BSW	103510	6.0- (7.0) -8.0	23	6.3	23.9	9.2	1356	51	869
	235/50ZR15	94W	SL	BSW	104320	6.5- (7.5) -8.5	23	6.3	24.3	9.6	1477	51	855
	195/50ZR16	84W	SL	BSW	103500	5.5- (6.0) -7.0	20	6.3	23.7	7.9	1102	51	876
16	205/45ZR16	83W	SL	BSW	103800	6.5- (7.0) -7.5	21	6.3	23.2	8.1	1074	51	894
	205/50ZR16	87W	SL	BSW	103810	5.5- (6.5) -7.5	22	6.3	24.1	8.4	1201	51	862
	205/55ZR16	94W	XL	BSW	104310	5.5- (6.5) -7.5	23	6.3	24.9	8.4	1477	50	835
	225/45ZR16	89W	SL	BSW	103530	7.0- (7.5) -8.5	23	6.3	23.9	8.9	1279	51	868
	245/45ZR16	94W	SL	BSW	104330	7.5- (8.0) -9.0	24	6.3	24.6	9.6	1477	51	843
	255/50ZR16	99W	SL	BSW	104480	7.0- (8.0) -9.0	28	6.3	26.1	10.4	1709	51	797
	205/40ZR17	80W	SL	BSW	103540	7.0- (7.5) -8.0	20	6.3	23.5	8.3	992	51	885
17	205/40ZR17	84W	XL	BSW	104740	7.0- (7.5) -8.0	21	6.3	23.5	8.3	1102	50	885
	205/45ZR17	84W	SL	BSW	103850	6.5- (7.0) -7.5	22	6.3	24.3	8.1	1102	51	857
	205/50ZR17	89W	SL	BSW	103820	5.5- (6.5) -7.5	23	6.3	25.1	8.4	1279	51	827
	215/45ZR17	87W	SL	BSW	103390	(7.0) -8.0	23	6.3	24.6	8.4	1201	51	843
	225/45ZR17	94W	XL	BSW	106910	7.0- (7.5) -8.5	24	6.3	25	8.9	1477	50	832
	235/40ZR17	90W	SL	BSW	103410	8.0- (8.5) -9.5	24	6.3	24.4	9.5	1323	51	851
	235/45ZR17	94W	SL	BSW	103860	7.5- (8.0) -9.0	25	6.3	25.4	9.3	1477	51	819
	245/40ZR17	91W	SL	BSW	104510	8.0- (8.5) -9.5	25	6.3	24.7	9.8	1356	51	840
	255/40ZR17	94W	SL	BSW	103880	8.5- (9.0) -10.0	27	6.3	25	10.2	1477	51	830
	275/40ZR17	98W	SL	BSW	104520	9.0- (9.5) -11.0	28	6.3	25.7	10.9	1653	51	809
	315/35ZR17	102W	SL	BSW	104430	10.5- (11.0) -12.5	31	6.3	25.7	12.6	1874	51	809
	225/40ZR18	92Y	XL	BSW	102700	7.5- (8.0) -9.0	24	6.3	25.1	9.1	1389	50	828
	235/40ZR18	95Y	XL	BSW	104750	8.0- (8.5) -9.5	25.4	6.3	25.4	9.5	1521	50	818
18	245/40ZR18	93Y	SL	BSW	103870	8.0- (8.5) -9.5	26	6.3	25.7	9.8	1433	51	808
	255/35ZR18	90Y	SL	BSW	103830	8.5- (9.0) -10.0	26	6.3	25	10.2	1323	51	831
	265/35ZR18	97Y	XL	BSW	104570	9.0- (9.5) -10.5	27	6.3	25.3	10.7	1609	50	821
	275/35ZR18	95Y	SL	BSW	104260	9.0- (9.5) -11.0	28	6.3	25.6	10.9	1521	51	813
	295/30ZR18	98Y	XL	BSW	104270	10.0- (10.5) -11.0	29	6.3	25	11.9	1653	50	831
	305/35ZR18	105Y	XL	BSW	104460	10.0- (11.0) -12.0	32	6.3	26.4	12.3	2039	50	786
	315/30ZR18	98Y	SL	BSW	104370	10.5- (11.0) -11.5	31	6.3	25.5	12.6	1653	51	816
	335/30ZR18	102Y	SL	BSW	104340	11.5- (12.0) -12.5	33	6.3	25.9	13.5	1874	51	801
	235/35ZR19	(91Y)	XL	BSW	103840	8.0- (8.5) -9.5	25	6.3	25.5	9.5	1356	50	816
	245/35ZR19	(89Y)	SL	BSW	104440	8.0- (8.5) -9.5	25	6.3	25.8	9.8	1279	51	806
19	265/30ZR19	89Y	SL	BSW	104240	9.0- (9.5) -10.0	27	6.3	25.3	10.7	1279	51	821
	265/35ZR19	(94Y)	SL	BSW	104490	9.0- (9.5) -10.5	29	6.3	26.3	10.7	1477	51	789
	265/40ZR19	(98Y)	SL	BSW	104500	9.0- (9.5) -10.5	30	6.3	27.4	10.7	1653	51	759
	275/35R19	(96Y)	SL	BSW	104420	9.0- (9.5) -11.0	30	6.3	26.6	10.9	1565	51	782
	285/35ZR19	(99Y)	SL	BSW	104450	9.5- (10.0) -11.0	31	6.3	26.9	11.4	1709	51	773
	295/30ZR19	100Y	XL	BSW	104280	10.0- (10.5) -11.0	30	6.3	26	11.9	1764	50	798
	305/30ZR19	(102Y)	XL	BSW	104290	10.5- (11.0) -11.5	32	6.3	26.3	12.3	1874	50	791
	325/30ZR19	(101Y)	SL	BSW	104380	11.0- (11.5) -12.0	33	6.3	26.7	13	1819	51	777
	345/30ZR19	(105Y)	SL	BSW	104350	11.5- (12.0) -12.5	36	6.3	27.2	13.8	2039	51	764
	255/35ZR20	(93Y)	SL	BSW	104400	8.5- (9.0) -10.0	29	6.3	27	10.2	1433	51	769
20	285/30ZR20	(95Y)	SL	BSW	104560	9.5- (10.0) -10.5	31	6.3	26.8	11.4	1521	51	776
	285/35ZR20	(100Y)	SL	BSW	104150	9.5- (10.0) -11.0	33	6.3	27.9	11.4	1764	51	745
	305/35ZR20	(104Y)	SL	BSW	104410	10.0- (11.0) -12.0	35	6.3	28.4	12.3	1984	51	731
	315/30ZR20	(101Y)	SL	BSW	104300	10.5- (11.0) -11.5	35	6.3	27.5	12.6	1819	51	756
	325/30ZR20	(102Y)	SL	BSW	104390	11.0- (11.5) -12.0	35	6.3	27.7	13	1874	51	750

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "(Y)" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

DOT COMPETITION TIRE

The Proxes R888 is for drivers who know what it means to really push a car. Its optimized construction and tread design balances dry performance and wet traction, keeping you fully under control in extreme driving situations. If your idea of fun includes road racing, track days, and high performance driving schools, then this DOT competition tire* is for you.

*Caution: Recommended for competition events only.

POPULAR FITMENTS

Race-prepared vehicles such as:
BMW 3-Series
Chevrolet Corvette
Mazda Miata
Nissan GT-R
Porsche 911
Subaru WRX

UTQG

100 AA A

ENHANCED R-COMPOUND TREAD

- Maximizes grip for better competitive handling and performance.

UNIDIRECTIONAL V-SHAPED TREAD DESIGN

- Increased tread area and limited void improve dry traction.
- V-shaped grooves assist with wet traction.

CONTINUOUS CENTER CONTACT

- Increases braking performance and dry traction.

SEMI-SLICK SHOULDER AREA

- Improves grip for better steering response.

STIFF BEAD CONSTRUCTION AND WIDER TREAD WIDTH

- Increases cornering force for better competitive handling.

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES R888:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: 32 to 38 (psi)
- Camber: -1° to -3°
- Caster: As much positive as possible

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
14	205/55R14	85V	SL	BSW	168060	5.5- (6.5) -7.5	20	6.3	22.8	8.4	1135	51	911
	225/50R14	89V	SL	BSW	168070	6.0- (7.0) -8.0	21	6.3	22.8	9.3	1279	51	910
16	225/50ZR16	92W	SL	BSW	168150	6.0- (7.0) -8.0	24	6.3	24.7	9.3	1389	51	840
18	275/40ZR18	99W	SL	BSW	168110	9.0- (9.5) -11.0	29	6.4	26.7	11	1709	51	779
	285/30ZR18	97Y	RD	BSW	168250	9.5- (10.0) -10.5	28	6.3	24.8	11.3	1609	50	836



Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "[Y]" = 195mph. "SL" = Standard Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

DOT COMPETITION TIRE

Race-ready off the shelf with a 4/32" deep tread, the Proxes RR delivers consistent lap times and predictable handling on dry tracks. This DOT competition tire* is ideal for NASA road racing, track days, and high performance driving schools. The symmetric two-groove tread design and special tread compound provide a maximum contact patch and ultimate dry traction with superior cornering force.

*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

Race-prepared vehicles in NASA SPEC classes:
American Iron
Honda Challenge
Spec E30
Spec Miata
Spec 944

UTQG
40 C A



Toyo Tires and the Proxes RR are the official tire of NASA and the spec tire of record in numerous classes.

RACING TREAD COMPOUND

- Increases grip and improves lap times.

REINFORCED SIDEWALL AND HIGH-MODULUS BEAD FILLER

- Provides excellent steering response and feedback.

WEAR INSPECTION HOLES

- Provides easy tread depth measurement from any position.

SIDEWALL MARKING AREA

- Allows for easy labeling on the sidewall.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	205/60R13	86V	SL	BSW	255150	5.5- (6.0) -7.5	19	3.7	22.7	8.2	1168	51	916
	205/50ZR15		SL	BSW	255000	5.5- (6.5) -7.5	20	3.7	23	8.5	1168	51	902
15	225/45ZR15		SL	BSW	255140	7.0- (7.5) -8.5	21	3.7	23	8.9	1201	51	905
	225/50ZR15		SL	BSW	255080	6.0- (7.0) -8.0	22	3.7	23.9	9.2	1356	51	869
16	225/50R16		SL	BSW	255160	6.0- (7.0) -8.0	24	3.7	24.9	9.2	1389	51	835
	245/45ZR16		SL	BSW	255130	7.5- (8.0) -9.0	23	3.7	24.6	9.6	1477	51	843
17	235/40ZR17		SL	BSW	255120	8.0- (8.5) -9.5	22	3.7	24.4	9.5	1323	51	851
	255/40ZR17		SL	BSW	255110	8.5- (9.0) -10.0	24	3.7	25	10.2	1477	51	830
	275/40ZR17		SL	BSW	255100	9.0- (9.5) -11.0	28	3.7	25.7	10.9	1653	51	809
	P275/35ZR18	87	LL	BSW	255070	9.0- (9.5) -11.0	26	3.7	25.6	10.9	1201	44	813
18	295/30ZR18		SL	BSW	255210	10.0- (10.5) -11.0	28	3.7	25	11.9	1477	51	831
	P305/35R18		LL	BSW	255170	10.0- (11.0) -12.0	30	3.7	26.4	12.3	1433	44	786
	315/30ZR18		SL	BSW	255180	10.5- (11.0) -11.5	29	3.7	25.5	12.6	1653	51	816
19	235/35ZR19		SL	BSW	255230	8.0- (8.5) -9.5	23	3.7	25.5	9.5	1201	51	816
	295/30ZR19		SL	BSW	255220	10.0- (10.5) -11.0	30	3.7	26	11.9	1565	51	798
20	285/30ZR20	(95Y)	SL	BSW	255190	9.5- (10.0) -10.5	29	3.7	26.8	11.4	1521	51	776
	285/35ZR20	(100Y)	SL	BSW	255200	9.5- (10.0) -11.0	32	3.7	27.9	11.4	1764	51	745

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RR:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

DOT COMPETITION TIRE

The design and components of the Proxes RA1 came from our experience in winning races all over the world. This DOT competition tire* is well-known by road racers for delivering quick lap times, consistency, and long wear. Full 8/32" tread depth provides good competitive wet traction, while shaving to 4/32" improves dry traction.

*Caution: Recommended for competition events only.

POPULAR FITMENTS

Race-prepared vehicles such as:
BMW E30
Honda Civic
Honda CRX
Honda S2000
Mazda Miata MX-5

UTQG

100 AA A



Toyo Tires is the official tire of NASA and the spec tire of record in numerous classes.

SOFT BUT DURABLE R-COMPOUND

- Improves grip for better competitive handling and performance.

STEPPED TREAD DESIGN

- Increased tread area and limited void improves dry traction.
- Groove arrangement assists with wet traction.

TREAD DEPTH INDICATORS

- Allows for more accurate tread depth measurement near the shoulders.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	205/60R13	86V	SL	BSW	236700	5.5- (6.0) -7.5	20	8.0	22.7	8.2	1158	44	970
15	205/50ZR15		SL	BSW	236840	5.5- (6.5) -7.5	20	8.0	23.1	8.4	1135	44	899
	225/45ZR15		SL	BSW	236970	7.0- (7.5) -8.5	23	8.0	22.9	9	1201	44	908
	225/50ZR15		SL	BSW	236830	6.0- (7.0) -8.0	23	8.0	23.9	9.2	1323	44	869
16	225/50ZR16		SL	BSW	236890	6.0- (7.0) -8.0	23	8.0	24.9	9.2	1390	44	835
	245/45ZR16		SL	BSW	236800	7.5- (8.0) -9.0	25	8.0	24.7	9.6	1477	44	843
	P255/50ZR16		SL	BSW	236880	7.0- (8.0) -9.0	27	8.0	26.1	10.4	1687	44	797
17	235/40ZR17		SL	BSW	236760	8.0- (8.5) -9.5	24	8.0	24.4	9.6	1323	44	852
	255/40ZR17		SL	BSW	236770	8.5- (9.0) -10.0	26	8.0	25	10.4	1477	44	828
	275/40ZR17		SL	BSW	236780	9.0- (9.5) -11.0	29	8.0	25.7	10.9	1653	44	809
18	275/35ZR18		SL	BSW	236710	9.0- (9.5) -11.0	30	8.0	25.6	10.9	1521	44	812

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RA1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

FULL-SLICK COMPETITION TIRE

The Proxes RS1 is a full-slick competition tire* that provides consistent performance throughout the life of the tire. This race tire is excellent in dry braking and built to endure closed-course road racing, time attack, track days, and high performance driving schools. Compound, construction, and design contribute to its durability, responsive handling, and high-speed performance in dry weather conditions.

*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

- Camaro
- Mustang
- Nissan GT-R
- Porsche GT-3

ADVANCED RAYON CASING

- Provides durability and stability at high speed.

HIGH-MODULUS BEAD FILLER AND STEEL REINFORCED SIDEWALL

- Provides crisp and responsive handling.
- Offers excellent steering response and feel.

DURABLE, RACE-PROVEN COMPOUND

- Contributes to excellent dry braking.
- Offers excellent wear resistance.
- Provides high grip levels across a wide temperature range.

SPIRAL WOUND CAP PLY

- Provides uniformity and consistency.



WHEEL DIA.	TIRE SIZE	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
18	245/640R18	SL	BSW	163460	(8.5)	25	25.4	9.8	N/A	N/A	818
	285/650R18	SL	BSW	171680	(10.0)	27	25.5	11.1	N/A	N/A	814
	285/680R18	SL	BSW	163450	10.0	31	26.7	11.7	N/A	N/A	778
	335/710R18	SL	BSW	171440	12.0	34	27.7	13.4	N/A	N/A	749

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RS1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

*"SL" = Standard Load, "BSW" = Black Sidewall.
Bold designates measuring rim width. **Inflated dimensions.

DOT DRAG RADIAL

This DOT drag radial* was designed to help muscle cars and street machines transfer power to the ground. An optimized tread design coupled with a unique tread compound, and strengthened radial construction give superior grip, straight-line performance, and high-speed stability as you blast down the track. The Proxes TQ is also designed to be quiet on the drive home.

*Caution: Use extreme caution and reduced speed when driving in wet conditions. Recommended for competition events only.

POPULAR FITMENTS

Race-prepared late-model American muscle cars such as:
Chevrolet Camaro
Dodge Challenger
Ford Mustang
Pontiac Firebird

UTQG

O B B

DRAG RADIAL
TREAD COMPOUND

- Maximizes grip at launch.

DUAL-PURPOSE
ASYMMETRIC TREAD DESIGN

- Optimizes performance for track and street use with two distinct tread areas.

SEMI-SLICK INNER AREA

- Improves traction on independent rear suspension vehicles, while maintaining consistent grip on straight axle rear suspension vehicles.

VARIABLE PITCH OUTER AREA

- Reduces pattern noise when on the street.

DRAG-RACE CONSTRUCTION
WITH SPECIAL DRAG-RACE
RADIAL CARCASS

- Helps tire maintain a large, consistent contact patch for increased traction throughout a drag run.



SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES TQ:

- Minimum Inflation Pressure for the Track: 15 PSI
- Recommended Inflation Pressure: Start with a cold tire inflation pressure of 17 psi. Adjust the tire inflation pressure up or down in 1-psi increments to achieve the desired results. Use as much pressure as possible for track conditions without causing the tire to slip. Higher inflation pressures will improve reaction time, stability, and rolling resistance.

"LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall.
Bold designates measuring rim width. **Inflated dimensions.

WHEEL DIA.	TIRE SIZE	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
16	P255/50R16	SL	BSW	172020	7.0- (8.0) -9.0	27.7	6.4	26.1	10.4	1687	44	796
	P275/45R16	LL	BSW	172070	8.5- (9.0) -10.5	27.3	6.4	25.8	10.8	1477	44	806
17	P275/40R17	LL	BSW	172010	9.0- (9.5) -11.0	27.6	6.4	25.8	11	1433	44	805
	P315/35R17	LL	BSW	172030	10.5- (11.0) -12.5	31	6.4	25.6	12.6	1433	44	813
	P345/40R17	LL	BSW	172050	11.5- (12.0) -13.5	35.9	6.4	27.7	13.7	2094	44	749
18	P315/35R18	LL	BSW	172060	10.5- (11.0) -12.5	31.1	6.4	26.6	12.5	1521	44	780

PASSENGER CAR

COMFORT

A blue-tinted photograph of a modern sedan driving on a road. The car is shown from a side-rear perspective, moving towards the right. The background features a road with white lane markings and a hilly landscape. The word 'COMFORT' is overlaid in large, bold, white capital letters across the center of the image.

PASSENGER CAR

VERSADO NOIR



LUXURY TOURING ALL-SEASON

DRY HANDLING	3.5
WET HANDLING	4.0
RIDE COMFORT	5.0
QUIET RIDE	5.0
TREAD LIFE	5.0
WINTER HANDLING	4.0
ROLLING RESISTANCE	4.5

UTQG

620 A A

MILEAGE WARRANTY

Up to 75,000 miles*

VEHICLE & APPLICATION SEGMENT

Luxury Sedans
Direct OE Replacement

SPEED RATING

H-V-W

WHEEL DIAMETER

15"-16"-17"-18"

VERSADO ECO



ECO TOURING ALL-SEASON

DRY HANDLING	3.0
WET HANDLING	4.0
RIDE COMFORT	5.0
QUIET RIDE	5.0
TREAD LIFE	4.0
WINTER HANDLING	3.0
ROLLING RESISTANCE	5.0

UTQG

400 A A

MILEAGE WARRANTY

50,000 miles*

VEHICLE & APPLICATION SEGMENT

Direct OE Replacement

SPEED RATING

T-H-V-W

WHEEL DIAMETER

15"-16"-17"-18"

EXTENSA HP II



HIGH PERFORMANCE ALL-SEASON

DRY HANDLING	3.5
WET HANDLING	4.0
RIDE COMFORT	3.5
QUIET RIDE	4.0
TREAD LIFE	3.5
WINTER HANDLING	2.5
ROLLING RESISTANCE	3.5

UTQG

500 A A

MILEAGE WARRANTY

45,000 miles*

VEHICLE & APPLICATION SEGMENT

Passenger Cars
Luxury Cars
Direct OE Replacement
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

15"-16"-17"-18"-19"-20"

EXTENSA A/S



PASSENGER ALL-SEASON

DRY HANDLING	3.0
WET HANDLING	3.5
RIDE COMFORT	4.5
QUIET RIDE	4.0
TREAD LIFE	4.5
WINTER HANDLING	4.0
ROLLING RESISTANCE	4.0

UTQG

S/T-Rated: 620 A B
H-Rated: 360 A A

MILEAGE WARRANTY

Up to 65,000 miles*

VEHICLE & APPLICATION SEGMENT

Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"

CELSIUS



VARIABLE-CONDITIONS

DRY HANDLING	3.0
WET HANDLING	3.5
RIDE COMFORT	4.5
QUIET RIDE	3.5
TREAD LIFE	4.0
WINTER HANDLING	5.0
ROLLING RESISTANCE	4.0
SNOW TRACTION	5.0
ICE TRACTION	5.0

UTQG

S-Rated: 400 A B
T-Rated: 420 A B, 440 A B
H-Rated: 440 A A

MILEAGE WARRANTY

60,000 miles*

VEHICLE & APPLICATION SEGMENT

Passenger Cars
Luxury Cars
Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

14"-15"-16"-17"-18"-19"-20"

PASSENGER CAR:

Our tires are engineered to meet the highest expectations of quality, comfort, and performance. Add increased tread life and improved fuel economy, and driving on our tires is as practical as it is enjoyable. No matter what you drive, whether it's a passenger car or a CUV, Toyo Tires turns every experience behind the wheel into a pleasure.



* Performance Ratings are on a scale of 1 to 5 (best) in 0.5-point increments and can be compared within applicable Toyo product categories.

LUXURY TOURING ALL-SEASON TIRE

The Versado Noir is our premium, all-season touring tire for sedans and coupes. It offers over 30% more tread life than a leading competitor^ plus improved fuel efficiency and a quiet, comfortable ride throughout the life of the tire.

MILEAGE WARRANTY*

H-rated: 75,000 miles
V-rated: 65,000 miles
W-rated: 50,000 miles

POPULAR FITMENTS

Audi A3
BMW 3-Series
Cadillac ATS
Lexus LS460
Toyota Avalon

UTQG
620 A A



This ecology mark is applied to products that focus on improved fuel economy.

IMPROVED SILICA COMPOUND

- Increases tread life.
- Enhances wet performance.
- Improves fuel efficiency.

RIGID OUTSIDE TREAD

- Stabilizes tread blocks for quieter ride and improved wear.

HIGHER SIPE DENSITY ON INSIDE TREAD

- Provides more biting edges for increased traction in the snow.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves snow traction.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/60R15	88H	SL	BSW	136200	5.5-(6.0)-7.0	19	10.8	24.2	7.9	1235	51	858
	195/60R15	88V	SL	BSW	136210	5.5-(6.0)-7.0	20	10.2	24.2	7.9	1235	51	858
	195/65R15	91H	SL	BSW	136220	5.5-(6.0)-7.0	19	11.0	25	7.9	1356	51	831
	205/60R15	91H	SL	BSW	136230	5.5-(6.0)-7.5	21	11.0	24.7	8.2	1356	51	842
	205/65R15	94H	SL	BSW	136240	5.5-(6.0)-7.5	21	11.1	25.5	8.2	1477	51	816
	205/70R15	96H	SL	BSW	136250	5.0-(6.0)-7.0	23	11.2	26.3	8.2	1565	51	789
	215/70R15	98H	SL	BSW	136260	5.5-(6.5)-7.0	24	11.3	26.9	8.7	1653	51	773
16	205/55R16	91H	SL	BSW	136270	5.5-(6.5)-7.5	21	10.6	24.9	8.4	1356	51	835
	205/55R16	91V	SL	BSW	136280	5.5-(6.5)-7.5	20	10.0	24.9	8.4	1356	51	835
	205/60R16	92H	SL	BSW	136290	5.5-(6.0)-7.5	22	11.0	25.7	8.2	1389	51	809
	205/60R16	92V	SL	BSW	136300	5.5-(6.0)-7.5	22	10.3	25.7	8.2	1389	51	809
	205/65R16	95H	SL	BSW	136310	5.5-(6.0)-7.5	23	11.1	26.5	8.2	1521	51	785
	215/55R16	93H	SL	BSW	136320	6.0-(7.0)-7.5	22	10.7	25.3	8.9	1433	51	822
	215/60R16	95H	SL	BSW	136330	6.0-(6.5)-7.5	23	11.1	26.1	8.7	1521	51	795
	215/65R16	102H	XL	BSW	136340	6.0-(6.5)-7.5	24	11.2	27	8.7	1874	50	769
	225/50R16	92V	SL	BSW	136350	6.0-(7.0)-8.0	21	10.2	24.9	9.2	1389	51	835
	225/55R16	95V	SL	BSW	136360	6.0-(7.0)-8.0	22	10.2	25.7	9.2	1521	51	807
	225/60R16	98H	SL	BSW	136370	6.0-(6.5)-8.0	25	11.2	26.6	9	1653	51	781
	225/65R16	100H	SL	BSW	136380	6.0-(6.5)-8.0	25	11.3	27.5	9	1764	51	756
	235/60R16	100H	SL	BSW	136390	6.5-(7.0)-8.5	27	11.3	27.1	9.4	1764	51	767
	235/65R16	103H	SL	BSW	136400	6.5-(7.0)-8.5	27	11.5	28	9.4	1929	51	741
17	205/50R17	93V	XL	BSW	136410	5.5-(6.5)-7.5	20	10.0	25.1	8.4	1433	50	827
	215/45R17	87V	SL	BSW	136020	(7.0)-8.0	21	10.7	24.6	8.4	1201	51	843
	215/50R17	95V	XL	BSW	136420	6.0-(7.0)-7.5	22	10.1	25.5	8.9	1521	50	814
	215/55R17	94V	SL	BSW	136430	6.0-(7.0)-7.5	22	10.1	26.3	8.9	1477	51	790
	215/60R17	96H	SL	BSW	136440	6.0-(6.5)-7.5	25	11.1	27.2	8.7	1565	51	765
	215/65R17	99H	SL	BSW	136450	6.0-(6.5)-7.5	27	11.2	28	8.7	1709	51	741
	225/45R17	94H	XL	BSW	136460	7.0-(7.5)-8.5	22	10.8	25	8.9	1477	50	832
	225/50R17	94V	SL	BSW	136470	6.0-(7.0)-8.0	22	10.2	25.9	9.2	1477	51	802
	225/50R17	94W	SL	BSW	136480	6.0-(7.0)-8.0	22	10.2	25.9	9.2	1477	51	802
	225/55R17	97H	SL	BSW	136490	6.0-(7.0)-8.0	24	10.8	26.8	9.2	1609	51	776
	225/60R17	99H	SL	BSW	136500	6.0-(6.5)-8.0	27	11.2	27.6	9	1709	51	752
	235/45R17	97H	XL	BSW	136510	7.5-(8.0)-9.0	24	11.0	25.4	9.3	1609	50	819
	235/45R17	97W	XL	BSW	136520	7.5-(8.0)-9.0	25	10.3	25.4	9.3	1609	50	819
	235/50R17	96V	SL	BSW	136530	6.5-(7.5)-8.5	27	10.3	26.3	9.6	1565	51	790
18	235/55R17	99H	SL	BSW	136540	6.5-(7.5)-8.5	26	11.0	27.2	9.6	1709	51	765
	245/45R17	99H	XL	BSW	136550	7.5-(8.0)-9.0	23	11.1	25.7	9.6	1709	50	809
	245/50R17	99V	SL	BSW	136560	7.0-(7.5)-8.5	27	10.5	26.7	10	1709	51	778
	215/55R18	95H	SL	BSW	136570	6.0-(7.0)-7.5	25	10.7	27.3	8.9	1521	51	761
	225/40R18	92V	XL	BSW	136720	7.5-(8.0)-9.0	21	10.2	25.1	9.1	1389	50	828
	225/45R18	95V	XL	BSW	136010	7.0-(7.5)-8.5	23	10.2	25.9	8.9	1521	50	801
	225/50R18	95H	SL	BSW	136580	6.0-(7.0)-8.0	24	10.8	26.9	9.2	1521	51	773
	225/55R18	98H	SL	BSW	136590	6.0-(7.0)-8.0	28	10.8	27.8	9.2	1653	51	748
	225/60R18	100H	SL	BSW	136600	6.0-(6.5)-8.0	29	11.2	28.6	9	1764	51	726
	235/45R18	94V	SL	BSW	136610	7.5-(8.0)-9.0	27	10.3	26.3	9.3	1477	51	789
	235/50R18	97V	SL	BSW	136620	6.5-(7.5)-8.5	26	10.3	27.3	9.6	1609	51	761
	235/55R18	100V	SL	BSW	136630	6.5-(7.5)-8.5	27	10.3	28.2	9.6	1764	51	738
	245/40R18	93V	SL	BSW	136640	8.0-(8.5)-9.5	23	10.5	25.7	9.8	1433	51	808
	245/45R18	96V	SL	BSW	136650	7.5-(8.0)-9.0	25	10.5	26.7	9.6	1565	51	779
	245/50R18	100V	SL	BSW	136660	7.0-(7.5)-8.5	28	10.5	27.7	10	1764	51	751

*Mileage projection based upon commissioned third-party test results. Test conducted on 215/60R16 tires. Individual results may vary.

Speed rated "H" = 130mph, "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

ECO TOURING ALL-SEASON TIRE

The Versado Eco was created to improve fuel efficiency for hybrid, electric, and other environmentally friendly vehicles, while maintaining a smooth, quiet ride. It also uses naturally derived tread compound materials to help make daily driving easier on the environment.

MILEAGE WARRANTY*
50,000 miles*

POPULAR FITMENTS

Chevrolet Cruze Eco
Chevrolet Volt
Ford Fusion Hybrid
Toyota Camry Hybrid
Toyota Prius
Volkswagen Passat TDI

UTQG
400 A A



This ecology mark is applied to products that focus on improved fuel economy.

LOW ROLLING RESISTANCE COMPOUND

- Improves fuel efficiency.
- Increases tread life.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves snow traction.

FOUR CIRCUMFERENTIAL GROOVES

- Evacuates water to improve wet performance.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	175/65R15	84T	SL	BSW	113000	(5.0)-6.0	16	9.4	24.2	6.9	1102	44	858
	P185/65R15	86T	SL	BSW	113010	5.0-(5.5)-6.5	17	9.7	24.6	7.3	1168	44	844
	P195/65R15	89H	SL	BSW	113020	5.5-(6.0)-7.0	19	9.7	25	7.9	1279	51	831
16	P195/55R16	86V	SL	BSW	113030	5.5-(6.0)-7.0	19	9.6	24.4	7.8	1168	51	851
	P215/60R16	94V	SL	BSW	113050	6.0-(6.5)-7.5	24	10.2	26.2	8.7	1477	51	792
17	P215/45R17	87V	SL	BSW	113070	(7.0)-8.0	20	9.8	24.6	8.4	1201	51	843
	P215/55R17	93V	SL	BSW	113060	6.0-(7.0)-7.5	24	9.8	26.2	8.7	1433	51	793
	P225/50R17	93V	SL	BSW	113080	6.0-(7.0)-8.0	24	10.0	25.9	9.2	1433	51	802
18	P225/45R18	91W	SL	BSW	113090	7.0-(7.5)-8.5	23	10.0	26	9	1356	51	798



Speed rated "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

HIGH PERFORMANCE ALL-SEASON TIRE

The Extensa HP II delivers superb all-season handling, a comfortable ride, and a 45,000-mile warranty. This value-driven, high performance tire is the perfect balance between high quality, outstanding performance, and dynamic styling. The Extensa HP II stops up to 31 feet shorter in wet conditions than its predecessor.^

MILEAGE WARRANTY*
45,000 miles

POPULAR FITMENTS

Chevrolet Camaro
Ford Mustang
Honda Civic Si
Hyundai Veloster
Infiniti G35
Subaru Impreza WRX
Toyota 86

UTQG
500 A A



UNIDIRECTIONAL TREAD DESIGN

- Provides a perfect blend of all-season traction in a stylish package.

SINGLE-CUT AND DOUBLE-CUT TAPERS

- Optimizes block stiffness to enhance braking performance.

FULL DEPTH MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves light snow traction.

SPECIAL SILICA COMPOUND

- Provides good wet performance while maintaining tread life performance.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/45R15	78V	SL	BSW	196310	6.0-(6.5)-7.5	15	8.9	21.9	7.7	937	51	947
	195/50R15	86V	XL	BSW	196180	5.5-(6.0)-7.0	16	8.9	22.7	7.9	1168	50	914
	195/55R15	85V	SL	BSW	196190	5.5-(6.0)-7.0	16	8.9	23.4	7.9	1135	51	887
16	185/55R16	83V	SL	BSW	196390	5.0-(6.0)-6.5	18	8.8	24	7.6	1074	51	865
	195/50R16	84V	SL	BSW	196300	5.5-(6.0)-7.0	20	8.9	23.7	7.9	1102	51	877
	195/55R16	87V	SL	BSW	196360	5.5-(6.0)-7.0	20	8.9	24.4	7.9	1201	51	851
	205/45R16	87V	XL	BSW	196290	6.5-(7.0)-7.5	18	9.1	23.2	8.1	1201	50	894
	205/50R16	91V	XL	BSW	196210	5.5-(6.5)-7.5	21	9.1	24.1	8.4	1356	50	862
	205/55R16	94V	XL	BSW	196340	5.5-(6.5)-7.5	22	9.1	24.9	8.4	1477	50	835
	215/55R16	97V	XL	BSW	196430	6.0-(7.0)-7.5	24	9.2	25.3	8.9	1609	50	822
	225/50R16	92V	SL	BSW	196350	6.0-(7.0)-8.0	22	9.3	24.9	9.2	1389	51	835
	245/50R16	97V	SL	BSW	196460	7.0-(7.5)-8.5	26	9.6	25.7	10	1609	51	809
17	205/40R17	84W	XL	BSW	196370	7.0-(7.5)-8.0	19	9.1	23.5	8.3	1102	50	885
	205/45R17	88W	XL	BSW	196550	6.5-(7.0)-7.5	20	9.1	24.3	8.1	1235	50	857
	205/50R17	93W	XL	BSW	196110	5.5-(6.5)-7.5	21	9.1	25.1	8.4	1433	50	827
	215/45R17	91W	XL	BSW	196070	7.0-(7.0)-8.0	20	9.2	24.6	8.4	1356	50	843
	215/50R17	95W	XL	BSW	196530	6.0-(7.0)-7.5	23	9.2	25.5	8.9	1521	50	814
	215/55R17	94V	SL	BSW	196050	6.0-(7.0)-7.5	24	9.2	26.3	8.9	1477	51	790
	225/45R17	94W	XL	BSW	196090	7.0-(7.5)-8.5	21	9.3	25	8.9	1477	50	832
	225/50R17	98W	XL	BSW	196040	6.0-(7.0)-8.0	24	9.3	25.9	9.2	1653	50	802
	225/55R17	97V	SL	BSW	196150	6.0-(7.0)-8.0	27	9.3	26.8	9.2	1609	51	776
	235/45R17	97W	XL	BSW	196120	7.5-(8.0)-9.0	23	9.4	25.4	9.3	1609	50	819
	235/55R17	99V	SL	BSW	196440	6.5-(7.5)-8.5	27	9.4	27.2	9.6	1709	51	765
	245/45R17	99W	XL	BSW	196490	7.5-(8.0)-9.0	26	9.6	25.7	9.6	1709	50	809
	255/45R17	98W	SL	BSW	196570	8.0-(8.5)-9.5	27	9.7	26.1	10	1653	51	797
	275/40R17	98W	SL	BSW	196230	9.0-(9.5)-11.0	27	10.0	25.7	10.9	1653	51	809
	315/35R17	102W	SL	BSW	196470	10.5-(11.0)-12.5	31	10.5	25.7	12.6	1874	51	809
18	225/40R18	92W	XL	BSW	196030	7.5-(8.0)-9.0	22	9.3	25.1	9.1	1389	50	828
	225/45R18	95W	XL	BSW	196020	7.0-(7.5)-8.5	23	9.3	25.9	8.9	1521	50	801
	225/50R18	99W	XL	BSW	196410	6.0-(7.0)-8.0	26	9.3	26.9	9.2	1709	50	773
	235/40R18	95W	XL	BSW	196510	8.0-(8.5)-9.5	24	9.4	25.4	9.5	1477	50	818
	235/45R18	94W	SL	BSW	196400	7.5-(8.0)-9.0	25	9.4	26.3	9.3	1477	51	789
	235/50R18	101W	XL	BSW	196140	6.5-(7.5)-8.5	24	9.4	27.3	9.6	1819	50	761
	245/40R18	97W	XL	BSW	196260	8.0-(8.5)-9.5	28	9.6	25.7	9.8	1609	50	808
	245/45R18	100W	XL	BSW	196160	7.5-(8.0)-9.0	24	9.6	26.7	9.6	1764	50	779
	245/55R18	103V	SL	BSW	196220	7.0-(7.5)-8.5	31	9.6	28.6	10	1929	51	726
	255/35R18	94W	XL	BSW	196520	8.5-(9.0)-10.0	25	9.7	25	10.2	1521	50	831
	255/45R18	103W	XL	BSW	196540	8.0-(8.5)-9.5	28	9.7	27	10	1929	50	768
	275/40R18	99W	SL	BSW	196580	9.0-(9.5)-11.0	29	10.0	26.7	10.9	1709	51	779
	235/35R19	91W	XL	BSW	196420	8.0-(8.5)-9.5	23	9.4	25.5	9.5	1356	50	816
	245/40R19	98W	XL	BSW	196500	8.0-(8.5)-9.5	27	9.6	26.7	9.8	1653	50	777
	245/45R19	102W	XL	BSW	196240	7.5-(8.0)-9.0	24	9.6	27.7	9.6	1874	50	751
20	255/35R19	96W	XL	BSW	196320	8.5-(9.0)-10.0	26	9.7	26	10.2	1565	50	798
	275/40R19	105W	XL	BSW	196590	9.0-(9.5)-11.0	32	10.0	27.7	10.9	2039	50	751
	225/35R20	90W	XL	BSW	196270	7.5-(8.0)-9.0	22	9.3	26.2	9.1	1323	50	792
	245/35R20	95W	XL	BSW	196060	8.0-(8.5)-9.5	24	9.6	26.8	9.8	1521	50	776
	245/40R20	99W	XL	BSW	196330	8.0-(8.5)-9.5	25	9.6	27.7	9.8	1709	50	750
	245/45R20	103W	XL	BSW	196250	7.5-(8.0)-9.0	25	9.6	28.7	9.6	1929	50	725
	255/35R20	97W	XL	BSW	196380	8.5-(9.0)-10.0	27	9.7	27	10.2	1609	50	769
	275/30R20	97W	XL	BSW	196450	9.0-(9.5)-10.0	27	10.0	26.5	10.9	1609	50	783
	275/35R20	102W	XL	BSW	196480	9.0-(9.5)-11.0	29	10.0	27.6	10.9	1874	50	754
	275/40R20	106W	XL	BSW	196280	9.0-(9.5)-11.0	28	10.0	28.7	10.9	2094	50	725

^Performance claim based upon commissioned third-party test results. Wet braking based on test of Toyo Extensa® HP™ 215/45R17 and Toyo Extensa® HP II™ 215/45R17 tires from 60 to 0 MPH. Individual results may vary.

Speed rated "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

PASSENGER ALL-SEASON TIRE

The Extensa A/S provides all-season performance in dry, wet, or snowy conditions for a wide range of passenger cars and minivans. A comfortable ride and extended tread life add to the value of this Toyo tire.

MILEAGE WARRANTY*

S/T-rated: 65,000 miles
H-rated: 50,000 miles

POPULAR FITMENTS

Chevrolet Cruze
Ford Focus
Honda Civic
Hyundai Elantra
Kia Rio
Toyota Corolla

UTQG

S/T-rated: 620 A B
H-rated: 360 A A



SYMMETRIC TREAD DESIGN

- Enables cross rotation to reduce irregular wear.
- Improves all-season traction and tire life.

OPTIMIZED CENTER BLOCK ARRANGEMENT

- Variable-pitch angles provide good road contact for increased ride comfort.

FOUR WIDE CIRCUMFERENTIAL GROOVES AND VARIABLE PITCH CHANNELS

- Evacuates water to improve wet traction.

SHOULDER RIB

- Minimizes irregular wear.
- Increases stability.

MULTI-WAVE SIPES

- Minimizes irregular wear for longer tread life and a smooth, quiet ride.
- Improves snow traction.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	P155/80R13	79S	SL	BSW	147270	4.0-(4.5)-5.0	14	10.1	22.8	6.1	959	44	911
	P175/70R13	82T	SL	BSW	147280	4.5-(5.0)-6.0	16	11.3	22.6	6.8	1036	44	920
	P185/70R13	85S	SL	BSW	147290	4.5-(5.5)-6.0	17	11.5	23.2	7.4	1135	44	896
14	P175/65R14	81T	SL	BSW	147380	(5.0)-6.0	16	11.3	22.9	6.9	1019	44	908
	P185/60R14	82H	SL	BSW	147400	5.0-(5.5)-6.5	17	10.1	22.8	7.3	1047	51	913
	P185/65R14	85T	SL	BSW	147710	5.0-(5.5)-6.5	18	11.5	23.4	7.3	1124	44	887
	185/65R14	86H	SL	BSW	147390	5.0-(5.5)-6.5	16	10.1	23.5	7.2	1168	51	885
	P185/70R14	87T	SL	BSW	147340	4.5-(5.5)-6.0	17	11.5	24.2	7.5	1201	44	859
	P185/75R14	89S	SL	WW	147300	4.5-(5.0)-6.0	19	11.5	25	7.1	1290	44	832
	195/60R14	86H	SL	BSW	147410	5.5-(6.0)-7.0	17	10.2	23.2	7.7	1168	51	896
	P195/70R14	90T	SL	BSW	147350	5.0-(6.0)-6.5	19	11.6	24.8	7.9	1312	44	839
	P195/75R14	92S	SL	WW	147310	5.0-(5.5)-6.5	19	11.6	25.5	7.6	1400	44	814
	P205/70R14	93T	SL	BSW	147360	5.0-(6.0)-7.0	22	11.7	25.2	8.3	1433	44	823
15	P205/75R14	95S	SL	BSW	147320	5.0-(5.5)-7.0	22	11.7	26.1	7.8	1532	44	796
	P215/70R14	96T	SL	BSW	147370	5.5-(6.5)-7.0	23	11.8	25.8	8.8	1554	44	806
	P215/75R14	98S	SL	BSW	147330	5.5-(6.0)-7.0	24	11.8	26.7	8.3	1664	44	778
	P185/60R15	84T	SL	BSW	147540	5.0-(5.5)-6.5	18	11.2	23.7	7.4	1102	44	878
	P185/65R15	86T	SL	BSW	147490	5.0-(5.5)-6.5	19	11.5	24.4	7.3	1168	44	851
	185/65R15	88H	SL	BSW	147500	5.0-(5.5)-6.5	18	10.1	24.4	7.3	1235	51	851
	P195/60R15	87T	SL	BSW	147550	5.5-(6.0)-7.0	19	11.3	24.2	7.7	1190	44	859
	P195/65R15	89T	SL	BSW	147510	5.5-(6.0)-7.0	19	11.6	24.9	7.8	1279	44	833
	205/50R15	86H	SL	BSW	147590	5.5-(6.5)-7.5	21	10.0	23	8.3	1168	51	903
	P205/60R15	90T	SL	BSW	147560	5.5-(6.0)-7.5	21	11.5	24.7	8.1	1301	44	843
16	P205/65R15	92T	SL	BSW	147520	5.5-(6.0)-7.5	22	11.7	25.4	7.9	1400	44	817
	P205/70R15	95S	SL	WW	147460	5.0-(6.0)-7.0	23	11.7	26.3	8.2	1499	44	791
	P205/75R15	97S	SL	WW	147420	5.0-(5.5)-7.0	24	11.7	27.1	7.8	1598	44	766
	P215/60R15	93H	SL	BSW	147570	6.0-(6.5)-7.5	22	10.5	25.1	8.6	1411	51	828
	P215/65R15	95T	SL	BSW	147530	6.0-(6.5)-7.5	23	11.8	25.9	8.7	1510	44	802
	215/70R15	98T	SL	WW	147470	5.5-(6.5)-7.0	24	11.8	26.8	8.7	1653	44	776
	P215/75R15	100S	SL	WW	147430	5.5-(6.0)-7.0	25	11.8	27.6	8.4	1742	44	751
	225/60R15	96H	SL	BSW	147580	6.0-(6.5)-8.0	24	10.6	25.6	8.9	1565	51	813
	P225/70R15	100T	SL	WW	147480	6.0-(6.5)-7.5	26	12.0	27.3	9	1753	44	760
	P225/75R15	102S	SL	BSW	147440	(6.0)-7.5	27	12.0	28.3	8.7	1874	44	734
17	P235/75R15	105S	SL	WW	147450	6.0-(6.5)-8.0	28	12.1	28.9	9.1	2028	44	720
	P205/55R16	89T	SL	BSW	147720	5.5-(6.5)-7.5	23	11.8	24.8	8.3	1279	44	839
	205/55R16	91H	SL	BSW	147650	5.5-(6.5)-7.5	22	10.0	24.8	8.3	1356	51	838
	P205/60R16	91T	SL	BSW	147630	5.5-(6.0)-7.5	21	11.5	25.7	8.1	1356	44	809
	P205/65R16	94T	SL	BSW	147600	5.5-(6.0)-7.5	24	11.7	26.3	7.9	1477	44	789
	P215/60R16	94T	SL	BSW	147250	6.0-(6.5)-7.5	24	11.6	26	8.6	1477	44	798
	215/65R16	98T	SL	BSW	147610	6.0-(6.5)-7.5	24	11.8	26.9	8.7	1653	44	772
	P225/55R16	94T	SL	BSW	147660	6.0-(7.0)-8.0	27	11.2	25.7	9.1	1477	44	809
	225/55R16	99H	XL	BSW	147800	6.0-(7.0)-8.0	28	10.2	25.7	9.2	1709	50	807
	P225/60R16	97T	SL	BSW	147260	6.0-(6.5)-8.0	24	11.7	26.6	9.1	1609	44	782
18	225/65R16	100T	SL	BSW	147730	6.0-(6.5)-8.0	29	11.8	27.5	9	1764	44	756
	P235/60R16	99T	SL	BSW	147640	6.5-(7.0)-8.5	28	11.7	27	9.3	1709	44	769
	235/65R16	103T	SL	BSW	147620	6.5-(7.0)-8.5	28	11.8	27.9	9.4	1929	44	744
	P215/50R17	90T	SL	BSW	147700	6.0-(7.0)-7.5	25	11.1	25.4	8.6	1323	44	817
	P215/60R17	95T	SL	BSW	147670	6.0-(6.5)-7.5	27	11.6	27.1	8.6	1521	44	766
18	P215/65R17	98T	SL	BSW	147780	6.0-(6.5)-7.5	29	11.8	28	8.7	1653	44	741
	P225/50R17	93T	SL	BSW	147810	6.0-(7.0)-8.0	27	11.2	25.9	9.2	1433	44	802
	P225/55R17	95T	SL	BSW	147690	6.0-(7.0)-8.0	27	11.2	26.7	9.1	1521	44	778
	P225/60R17	98T	SL	BSW	147680	6.0-(6.5)-8.0	28	11.7	27.6	8.9	1653	44	754
18	P225/60R18	99H	SL	BSW	147790	6.0-(6.5)-8.0	30	10.6	28.6	9	1709	51	726

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall, "WW" = White Sidewall. Bold designates measuring rim width. **Inflated dimensions.

VARIABLE-CONDITIONS TIRE

Toyo Celsius offers year-round versatility plus winter-weather safety in one. This variable-conditions tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire. Celsius stops up to 14 feet shorter on snow and eight feet shorter on ice than a typical all-season tire^ plus it's backed by a 60,000-mile warranty.

MILEAGE WARRANTY*
60,000 miles

POPULAR FITMENTS

Ford Taurus
Honda Civic
Hyundai Sonata
Nissan Altima
Toyota Camry
Volkswagen Jetta

UTQG

400 A B - 440 A A



Three-Peak Mountain
Snowflake qualified for
severe snow conditions.

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for traction on wet and dry roads.

SNOW CLAWS

- Improves deep snow traction.
- Increases block rigidity for better ice and wet traction.

SLUSH GROOVES

- Increases traction by evacuating slush and snow.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on icy, wet, and dry roads.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)**	OVERALL WIDTH (IN.)**	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
14	185/65R14	86H	SL	BSW	128240	5.0-(5.5)-6.5	16	10.7	23.5	7.4	1168	51	885
	185/60R15	84T	SL	BSW	128250	5.0-(5.5)-6.5	17	10.6	23.7	7.4	1102	44	875
	185/65R15	88H	SL	BSW	128270	5.0-(5.5)-6.5	17	10.7	24.4	7.4	1235	51	850
	195/60R15	88H	SL	BSW	128260	5.5-(6.0)-7.0	19	10.7	24.2	7.9	1235	51	858
15	195/65R15	91H	SL	BSW	128280	5.5-(6.0)-7.0	19	10.8	25	7.9	1356	51	831
	205/65R15	94H	SL	BSW	128290	5.5-(6.0)-7.5	20	11.0	25.5	8.2	1477	51	816
	205/70R15	96T	SL	BSW	128300	5.0-(6.0)-7.0	22	11.3	26.3	8.2	1565	44	789
	205/75R15	97S	SL	BSW	128330	5.0-(5.5)-7.0	23	11.3	27.1	8	1609	44	766
	215/70R15	98T	SL	BSW	128310	5.5-(6.5)-7.0	24	11.3	26.9	8.7	1653	44	773
	225/70R15	100T	SL	BSW	128320	6.0-(6.5)-7.5	26	11.3	27.4	9	1764	44	757
	235/75R15	105S	SL	BSW	128340	6.0-(6.5)-8.0	29	11.3	28.9	9.3	2039	44	720
	205/55R16	91H	SL	BSW	128350	5.5-(6.5)-7.5	20	10.7	24.9	8.4	1356	51	835
	205/60R16	92H	SL	BSW	128360	5.5-(6.0)-7.5	21	10.8	25.7	8.2	1389	51	809
	205/65R16	95H	SL	BSW	128400	5.5-(6.0)-7.5	22	11.0	26.5	8.2	1521	51	785
16	215/60R16	95H	SL	BSW	128370	6.0-(6.5)-7.5	24	11.0	26.1	8.7	1521	51	795
	215/65R16	98T	SL	BSW	128410	6.0-(6.5)-7.5	25	11.1	27	8.7	1653	44	769
	225/60R16	98H	SL	BSW	128380	6.0-(6.5)-8.0	25	11.1	26.6	9	1653	51	781
	235/60R16	100T	SL	BSW	128390	6.5-(7.0)-8.5	27	11.2	27.1	9.4	1764	44	767
	235/65R16	103T	SL	BSW	128420	6.5-(7.0)-8.5	28	11.3	28	9.4	1929	44	741
	205/45R17	88V	XL	BSW	129520	6.5-(7.0)-7.5	21	10.1	24.3	8.1	1235	50	857
	205/50R17	93V	SL	BSW	128890	5.5-(6.5)-7.5	21	10.1	25.1	8.4	1433	50	827
	215/45R17	91V	XL	BSW	129450	(7.0)-8.0	21	10.2	24.6	8.4	1356	50	843
17	215/50R17	91H	SL	BSW	128430	6.0-(7.0)-7.5	22	10.8	25.5	8.9	1356	51	814
	215/55R17	98V	SL	BSW	128940	6.0-(7.0)-7.5	25	10.2	26.3	8.9	1653	50	790
	215/60R17	96H	SL	BSW	128440	6.0-(6.5)-7.5	25	11.0	27.2	8.7	1565	51	765
	225/45R17	94V	SL	BSW	128920	7.0-(7.5)-8.5	23	10.3	25	8.9	1477	50	832
	225/50R17	98V	SL	BSW	128930	6.0-(7.0)-8.0	23	10.3	25.9	9.2	1653	50	802
	225/55R17	101V	XL	BSW	129120	6.0-(7.0)-8.0	26	10.3	26.8	9.2	1819	50	776
	225/60R17	99H	SL	BSW	128450	6.0-(6.5)-8.0	26	11.1	27.6	9	1709	51	752
	235/45R17	97V	XL	BSW	128990	7.5-(8.0)-9.0	23	10.5	25.4	9.3	1609	50	819
	235/55R17	103V	SL	BSW	128910	6.5-(7.5)-8.5	28	10.5	27.2	9.6	1929	50	765
	245/45R17	99V	XL	BSW	129000	7.5-(8.0)-9.0	24	10.6	25.7	9.6	1709	50	809
	215/45R18	93V	XL	BSW	129580	(7.0)-8.0	22	10.2	25.6	8.4	1433	50	811
	225/40R18	92V	SL	BSW	128880	7.5-(8.0)-9.0	23	10.3	25.1	9.1	1389	50	828
18	225/45R18	95V	XL	BSW	128950	7.0-(7.5)-8.5	24	10.3	25.9	8.9	1521	50	801
	225/50R18	95V	SL	BSW	129180	6.0-(7.0)-8.0	25	10.3	26.9	9.2	1521	51	773
	235/40R18	95V	XL	BSW	129510	8.0-(8.5)-9.5	23	10.5	25.4	9.5	1521	50	818
	235/45R18	98V	XL	BSW	128980	7.5-(8.0)-9.0	26	10.5	26.3	9.3	1653	50	789
	235/50R18	101V	XL	BSW	128960	6.5-(7.5)-8.5	27	10.5	27.3	9.6	1819	50	761
	235/55R18	100V	SL	BSW	128970	6.5-(7.5)-8.5	28	10.5	28.1	9.6	1764	51	738
	245/40R18	97V	XL	BSW	129460	8.0-(8.5)-9.5	24	10.6	25.7	9.8	1609	50	808
	245/45R18	100V	XL	BSW	128900	7.5-(8.0)-9.0	27	10.6	26.7	9.6	1764	50	779
	245/55R18	103W	SL	BSW	129360	7.0-(7.5)-8.5	29	10.0	28.6	10	1929	51	726
	245/40R19	98V	XL	BSW	129470	8.0-(8.5)-9.5	27	10.6	26.7	9.8	1653	50	777
19	245/45R19	102V	XL	BSW	129200	7.5-(8.0)-9.0	31	10.6	27.7	9.6	1874	50	751
	245/50R19	105V	XL	BSW	129140	7.0-(7.5)-8.5	33	10.6	28.7	10	2039	50	724
	255/35R19	96V	XL	BSW	129600	8.5-(9.0)-10.0	28	10.7	26	10.2	1565	50	798
	255/40R19	100V	XL	BSW	129350	8.5-(9.0)-10	31	10.7	27	10.2	1764	50	768
	255/45R19	104V	XL	BSW	129130	8.0-(8.5)-9.5	32	10.7	28.1	10	1984	50	740
20	245/40R20	99V	XL	BSW	129590	8.0-(8.5)-9.5	28	10.6	27.7	9.8	1709	50	750
	245/45R20	103V	XL	BSW	129160	7.5-(8.0)-9.0	32	10.6	28.7	9.6	1929	50	725

*Performance claim based upon commissioned third-party test results. Test conducted on 215/60R16 tires. Snow braking from 30 to 0 mph; ice braking from 15 to 0 mph. Individual results may vary.

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. **Inflated dimensions.

WINTER

CONFIDENCE

OBSERVE GSI-5



STUDLESS
PASSENGER/CUV/SUV
WINTER

DRY HANDLING	3.5
WET HANDLING	3.5
RIDE COMFORT	4.0
QUIET RIDE	3.5
TREAD LIFE	3.5
SNOW TRACTION	4.5
ICE TRACTION	5.0

VEHICLE & APPLICATION SEGMENT

Luxury Sedans
Passenger Cars
Light Trucks
Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"



OBSERVE GARIT KX



STUDLESS
PERFORMANCE
WINTER

DRY HANDLING	4.5
WET HANDLING	4.5
RIDE COMFORT	4.0
QUIET RIDE	3.5
TREAD LIFE	4.5
SNOW TRACTION	4.0
ICE TRACTION	4.0

VEHICLE & APPLICATION SEGMENT

Sports Cars
Luxury Sedans
Direct OE Replacement

SPEED RATING

H

WHEEL DIAMETER

15"-16"-17"-18"-19"



OBSERVE G3-ICE



STUDDABLE
PASSENGER/LIGHT TRUCK
WINTER

DRY HANDLING	3.0
WET HANDLING	3.0
RIDE COMFORT	3.0
QUIET RIDE	3.0
TREAD LIFE	3.5
SNOW TRACTION	5.0
ICE TRACTION	5.0

VEHICLE & APPLICATION SEGMENT

Luxury Sedans
Passenger Cars
Light Trucks
Direct OE Replacement

SPEED RATING

Q-T-H

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"-
21"-22"



OPEN COUNTRY WLT1



STUDLESS
LIGHT TRUCK
WINTER

DRY HANDLING	4.0
WET HANDLING	4.0
RIDE COMFORT	4.0
QUIET RIDE	3.5
TREAD LIFE	4.5
SNOW TRACTION	4.5
ICE TRACTION	4.5

VEHICLE & APPLICATION SEGMENT

Light Trucks

SPEED RATING

Q

WHEEL DIAMETER

16"-17"-18"-20"



CELSIUS



VARIABLE-CONDITIONS

DRY HANDLING	3.0
WET HANDLING	3.5
RIDE COMFORT	4.5
QUIET RIDE	3.5
TREAD LIFE	4.0
SNOW TRACTION	4.5
ICE TRACTION	4.5

UTQG

400 A B, 420 A B, 440 A B, 440 A A

MILEAGE WARRANTY

60,000 miles

VEHICLE & APPLICATION SEGMENT

Luxury Sedans
Passenger Cars
Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

14"-15"-16"-17"

See pages 83-84.



CELSIUS CUV



VARIABLE-CONDITIONS

DRY HANDLING	4.0
WET HANDLING	3.5
RIDE COMFORT	4.5
QUIET RIDE	4.0
TREAD LIFE	4.0
SNOW TRACTION	4.5
ICE TRACTION	4.5

UTQG

H/V-Rated: 440 A A

MILEAGE WARRANTY

60,000 miles

VEHICLE & APPLICATION SEGMENT

Crossovers
Luxury SUVs
Direct OE Replacement

SPEED RATING

H-V

WHEEL DIAMETER

17"-18"-19"-20"

See pages 35-36.



WINTER:

Bring on the winter because these specialty tires are engineered to excel in snow and ice. Our advanced technologies provide drivers with improved traction and a comfortable ride in harsh conditions. And whether you choose a studless or studdable tire, Mother Nature won't keep you from where you want to go.





STUDLESS PASSENGER/CUV/SUV/LIGHT TRUCK WINTER TIRE

The Observe GSi-5 provides excellent performance for demanding winter road conditions. Improved ice and snow capabilities, as well as long wear life, are the benefits of advanced design, technology, and compounding.

POPULAR FITMENTS

Acura RDX
Audi Q7
Ford Edge
Ford Fusion
Lexus RX 350



Three-Peak Mountain
Snowflake qualified for
severe snow conditions.

ADVANCED TREAD COMPOUND

- Enhances wet grip, braking, and traction in low temperatures.

OBSERVE GSI-5

ABSORBENT CARBONIC POWDER

- Offers better contact and increased safety as carbonic powder created from bamboo absorbs moisture on road.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

WIDE LATERAL GROOVES

- Evacuates slush for better road grip.

CENTER RIB DESIGN

- Ensures straight-line stability.
- Increases ice traction in all directions.

TREAD BLOCK TECHNOLOGY

- A Spider Sipe design provides snow and ice traction in all directions.
- Saw toothed tread block edges improve snow traction and braking.



WINTER

W

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	155/80R13	79T	SL	BSW	130580	4.0-(4.5)-5.0	14	11.3	22.7	6.3	963	44	916
	175/70R13	82T	SL	BSW	130430	4.5-(5.0)-6.0	16	12.0	22.7	7.2	1047	44	916
	175/65R14	82T	SL	BSW	130020	(5.0)-6.0	17	12.0	23	7	1047	44	903
14	175/70R14	84T	SL	BSW	131010	4.5-(5.0)-6.0	18	12.0	23.7	7	1102	44	876
	185/60R14	82T	SL	BSW	130370	5.0-(5.5)-6.5	17	12.0	22.8	7.5	1047	44	913
	185/65R14	86T	SL	BSW	130100	5.0-(5.5)-6.5	18	12.0	23.5	7.4	1168	44	885
	185/70R14	88T	SL	BSW	130240	4.5-(5.5)-6.0	19	12.0	24.3	7.4	1235	44	857
	195/60R14	86T	SL	BSW	130860	5.5-(6.0)-7.0	19	12.0	23.2	7.9	1168	44	894
	195/70R14	91T	SL	BSW	130320	5.0-(6.0)-6.5	21	12.0	24.8	7.9	1356	44	838
	P205/75R14	95T	SL	BSW	130850	5.0-(5.5)-7.0	23	12.0	26.1	8	1532	44	795
	145/65R15	74T	SL	BSW	131000	4.0-(4.5)-5.0	14	11.0	22.5	5.9	827	44	923
	145/65R15	72T	SL	BSW	130970	4.0-(4.5)-5.0	14	11.0	22.5	5.9	783	44	923
15	175/55R15	77T	SL	BSW	130960	5.0-(5.5)-6.0	16	11.3	22.6	7.1	908	44	921
	175/65R15	84T	SL	BSW	130280	(5.0)-6.0	17	12.0	24	7.1	1102	44	865
	185/55R15	82T	SL	BSW	130610	5.0-(6.0)-6.5	17	12.0	23	7.6	1047	44	901
	185/60R15	84T	SL	BSW	130190	5.0-(5.5)-6.5	17	12.0	23.8	7.4	1102	44	874
	185/65R15	88T	SL	BSW	130030	5.0-(5.5)-6.5	18	12.0	24.5	7.6	1235	44	848
	195/50R15	82T	SL	BSW	100780	5.5-(6.0)-7.0	19	12.0	22.7	7.9	1047	44	914
	195/55R15	85T	SL	BSW	100860	5.5-(6.0)-7.0	20	12.0	23.4	7.9	1135	44	887
	195/60R15	88T	SL	BSW	130210	5.5-(6.0)-7.0	20	12.0	24.3	7.9	1235	44	854
	195/65R15	91T	SL	BSW	130000	5.5-(6.0)-7.0	20	12.0	25	8	1356	44	833
	205/60R15	91T	SL	BSW	130440	5.5-(6.0)-7.5	20	12.0	24.7	8.1	1356	44	841
	205/65R15	94T	SL	BSW	130140	5.5-(6.0)-7.5	21	12.0	25.5	8	1477	44	816
	P205/70R15	95T	SL	BSW	130120	5.0-(6.0)-7.0	23	12.0	26.3	8.2	1499	44	791
	P205/75R15	97T	SL	BSW	130560	5.0-(5.5)-7.0	24	12.0	27.1	7.9	1598	44	766
	215/60R15	94T	SL	BSW	130820	6.0-(6.5)-7.5	22	12.0	25.2	8.7	1477	44	825
	215/65R15	96T	SL	BSW	130750	6.0-(6.5)-7.5	23	12.0	26	8.7	1565	44	798
	215/70R15	98T	SL	BSW	130010	5.5-(6.5)-7.0	24	12.0	26.8	8.7	1653	44	775
	P215/75R15	100T	SL	BSW	130760	5.5-(6.0)-7.0	26	12.0	27.6	8.3	1742	44	752
	225/70R15	100T	SL	BSW	130880	6.0-(6.5)-7.5	29	12.7	27.4	9	1764	44	759
	P225/75R15	102T	SL	BSW	130730	(6.0)-7.5	27	13.4	28.2	8.8	1874	44	735
	225/80R15	105T	SL	BSW	132090	(6.0)-7.5	31	13.4	29.2	8.8	2039	44	712
	235/75R15	105T	SL	BSW	130380	6.0-(6.5)-8.0	29	13.4	28.8	9.3	2039	44	722
265/70R15	112T	SL	BSW	132220	7.0-(8.0)-9.0	38	14.0	29.6	10.7	2469	44	701	
265/75R15	112T	SL	BSW	130670	7.0-(7.5)-9.0	38	14.0	30.6	10.6	2469	44	678	
16	175/80R16	91T	SL	BSW	132070	4.5-(5.0)-6.0	22	12.0	27	7	1356	44	769
	185/55R16	83H	SL	BSW	130410	5.0-(6.0)-6.5	18	12.0	24.1	7.6	1074	51	862
	P185/60R16	86T	SL	BSW	132290	5.0-(5.5)-6.5	19	12.0	24.7	7.4	1168	44	840
	195/50R16	84T	SL	BSW	130620	5.5-(6.0)-7.0	19	12.0	23.8	7.8	1102	44	874
	195/55R16	87T	SL	BSW	130570	5.5-(6.0)-7.0	19	12.0	24.5	7.8	1201	44	848
	205/55R16	94T	XL	BSW	130160	5.5-(6.5)-7.5	21	12.0	24.9	8.4	1477	50	835
	205/60R16	92T	SL	BSW	130130	5.5-(6.0)-7.5	22	12.0	25.7	8.1	1389	44	809
	205/65R16	95T	SL	BSW	130310	5.5-(6.0)-7.5	23	12.0	26.5	8.2	1521	44	785
	P205/70R16	96S	SL	BSW	130740	5.0-(6.0)-7.0	24	12.0	27.3	8.1	1565	44	761
	215/55R16	93T	SL	BSW	100810	6.0-(7.0)-7.5	24	12.0	25.3	8.9	1433	44	822
	215/55R16	97T	XL	BSW	131400	6.0-(7.0)-7.5	24	12.0	25.3	8.9	1609	50	822
	215/60R16	95T	SL	BSW	130180	6.0-(6.5)-7.5	24	12.0	26.2	8.7	1521	44	793
	215/65R16	98T	SL	BSW	130040	6.0-(6.5)-7.5	25	12.0	27	8.7	1653	44	769
	215/70R16	100S	SL	BSW	130090	5.5-(6.5)-7.0	27	12.0	27.8	8.6	1764	44	746
	215/75R16	103S	SL	BSW	130920	5.5-(6.0)-7.0	27	13.4	28.7	8.2	1929	44	724
	225/60R16	98T	SL	BSW	130200	6.0-(6.5)-8.0	26	12.7	26.6	8.9	1653	44	781
	225/65R16	100T	SL	BSW	130250	6.0-(6.5)-8.0	28	12.0	27.5	9	1764	44	756
	225/70R16	103S	SL	BSW	130170	6.0-(6.5)-7.5	28	12.7	28.4	8.9	2094	44	731
	225/75R16	104S	SL	BSW	130530	(6.0)-7.5	29	13.4	29.2	8.8	1984	44	711
	235/60R16	100S	SL	BSW	130500	6.5-(7.0)-8.5	27	13.4	27.1	9.5	1764	44	767
	235/65R16	103T	SL	BSW	130050	6.5-(7.0)-8.5	28	13.4	28	9.5	1929	44	742
	235/70R16	106S	SL	BSW	130070	6.0-(7.0)-8.0	30	13.4	29	9.5	2094	44	716
	235/75R16	108S	SL	BSW	130900	6.0-(6.5)-8.0	32	13.4	29.8	9.3	2205	44	697
	245/70R16	107S	SL	BSW	130520	6.5-(7.0)-8.0	31	13.4	29.5	9.8	2149	44	704
	245/75R16	111S	SL	BSW	130450	6.5-(7.0)-8.0	34	13.4	30.5	9.8	2403	44	682
	255/70R16	111S	SL	BSW	130890	6.5-(7.5)-8.5	36	13.4	30.1	10.3	2403	44	691

STUDLESS PERFORMANCE WINTER TIRE

When the conditions turn to snow and ice, the Observe Garit KX is the tire for your sports car. This unidirectional winter performance tire has an H-speed rating and is designed for traction in harsh winter conditions.

POPULAR FITMENTS

- Acura TSX
- Audi A4
- Honda Accord
- Toyota Camry
- Volkswagen Jetta



Three-Peak Mountain Snowflake qualified for severe snow conditions.

ADVANCED TREAD COMPOUND

- Enhances wet grip, braking, and traction in low temperatures.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

SAW-TOOTHED BLOCKS

- Improves snow traction and braking.

HIGH-DENSITY WAVY SIPES

- Increase snow traction with more biting edges.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
15	195/55R15	85H	SL	BSW	149760	5.5-(6.0)-7.0	19	11.6	23.3	7.9	1135	51	890
	195/50R16	84H	SL	BSW	149750	5.5-(6.0)-7.0	20	11.6	23.7	7.9	1102	51	878
16	195/55R16	87H	SL	BSW	149770	5.5-(6.0)-7.0	21	11.6	24.4	8	1201	51	852
	205/50R16	87H	SL	BSW	149720	5.5-(6.5)-7.5	21	12.2	24.1	8.4	1201	51	862
	205/55R16	94Q	XL	BSW	176300	5.5-(6.5)-7.5	23	12.2	25	8.4	1522	50	832
	205/55R16	94H	XL	BSW	149780	5.5-(6.5)-7.5	22	12.2	24.9	8.5	1477	50	835
	215/55R16	97H	XL	BSW	149790	6.0-(7.0)-7.5	24	12.2	25.3	8.9	1609	50	822
	225/50R16	92H	SL	BSW	149740	6.0-(7.0)-8.0	24	12.2	25	9.1	1389	51	830
	225/55R16	99H	XL	BSW	149800	6.0-(7.0)-8.0	26	12.2	25.8	9.3	1709	50	806
	205/50R17	93H	XL	BSW	149670	5.5-(6.5)-7.5	22	12.2	25.2	8.3	1433	50	825
17	215/45R17	91H	XL	BSW	149600	(7.0)-8.0	23	12.2	24.7	8.5	1356	50	840
	215/50R17	95H	XL	BSW	149840	6.0-(7.0)-7.5	24	11.6	25.5	8.6	1521	50	814
	215/55R17	94H	SL	BSW	149710	6.0-(7.0)-7.5	26	12.2	26.4	9	1477	51	786
	225/45R17	94H	XL	BSW	149610	7.0-(7.5)-8.5	25	12.2	25	9.1	1477	50	831
	225/50R17	94H	SL	BSW	149690	6.0-(7.0)-8.0	25	12.2	25.9	8.9	1477	51	802
	225/55R17	97H	SL	BSW	149660	6.0-(7.0)-8.0	28	12.2	26.8	9.2	1609	51	776
	235/45R17	97H	XL	BSW	149620	7.5-(8.0)-9.0	26	12.2	25.4	9.5	1609	50	819
	235/50R17	96H	SL	BSW	149700	6.5-(7.5)-8.5	27	12.2	26.3	9.5	1565	51	791
18	245/45R17	99H	XL	BSW	149810	7.5-(8.0)-9.0	27	12.2	25.7	9.7	1709	50	807
	225/45R18	91H	SL	BSW	149630	7.0-(7.5)-8.5	25	12.2	26.1	8.9	1356	51	797
	225/50R18	95H	SL	BSW	149830	6.0-(7.0)-8.0	27	12.2	26.9	9	1521	51	771
	235/45R18	98H	XL	BSW	149640	7.5-(8.0)-9.0	27	12.2	26.5	9.4	1653	50	785
19	245/45R18	96H	SL	BSW	149650	7.5-(8.0)-9.0	27	12.2	26.8	9.6	1565	51	776
	245/40R19	94H	SL	BSW	149820	8.0-(8.5)-9.5	27	12.2	26.7	9.7	1477	51	778

Speed rated "Q" = 99mph, "H" = 130mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

STUDDABLE PASSENGER/CUV/SUV/LIGHT TRUCK WINTER TIRE

Designed for tough winter conditions, the Observe G3-Ice combines excellent performance with driving comfort. For areas that experience severe winters, this tire can be studded for added traction on ice and compacted snow. Optimized stud hole placement delivers better traction and a quieter ride with fewer studs.

POPULAR FITMENTS

Chevrolet Silverado
Ford Fusion
Honda Accord
Subaru Outback
Toyota 4Runner
Volkswagen Passat



Three-Peak Mountain
Snowflake qualified for
severe snow conditions.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

HIGH-SILICA WINTER COMPOUND

- Ensures tread blocks remain flexible in lower temperatures.
- Enhances wet braking and handling even in lower temperatures.

OPTIMIZED STUD HOLE PLACEMENT

- Improves road contact and traction with fewer studs.
- Reduces noise, resulting in a quieter ride.
- Able to accept TSMI #11 studs to aid in ice traction.

LARGE U-SHAPED TREAD BLOCKS WITH SAW-TOOTH EDGE

- Grab onto the snow for better traction and braking.

GEAR EDGE DESIGN AT STUD HOLE

- Provides better traction during cornering and braking.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
13	175/70R13	82T	SL	BSW	138020	4.5-(5.0)-6.0	17	11.3	22.7	7	1047	44	916
	175/65R14	82T	SL	BSW	138050	(5.0)-6.0	17	11.3	23	7	1047	44	903
	175/70R14	84T	SL	BSW	138030	4.5-(5.0)-6.0	18	11.3	23.7	7	1102	44	876
14	185/60R14	82T	SL	BSW	138080	5.0-(5.5)-6.5	18	11.3	22.8	7.4	1047	44	913
	185/65R14	86T	SL	BSW	138060	5.0-(5.5)-6.5	18	11.3	23.5	7.4	1168	44	885
	185/70R14	88T	SL	BSW	138040	4.5-(5.5)-6.0	20	11.3	24.3	7.4	1235	44	857
	175/65R15	84T	SL	BSW	139130	(5.0)-6.0	18	11.3	24	7	1102	44	866
	185/55R15	82T	SL	BSW	138200	5.0-(6.0)-6.5	18	11.3	23	7.6	1047	44	902
15	185/60R15	84T	SL	BSW	138170	5.0-(5.5)-6.5	19	11.3	23.7	7.4	1102	44	875
	185/65R15	88T	SL	BSW	138070	5.0-(5.5)-6.5	20	11.3	24.4	7.4	1235	44	850
	195/50R15	82T	SL	BSW	138250	5.5-(6.0)-7.0	19	11.3	22.7	7.9	1047	44	914
	195/55R15	85T	SL	BSW	138210	5.5-(6.0)-7.0	20	11.3	23.4	7.9	1135	44	887
	195/60R15	88T	SL	BSW	138090	5.5-(6.0)-7.0	20	11.3	24.2	7.9	1235	44	858
	195/65R15	91T	SL	BSW	138010	5.5-(6.0)-7.0	21	11.3	25	7.9	1356	44	831
	205/65R15	94T	SL	BSW	138160	5.5-(6.0)-7.5	23	11.3	25.5	8.2	1477	44	816
	205/70R15	100T	XL	BSW	138000	5.0-(6.0)-7.0	27	12.5	26.3	8.2	1764	50	789
	215/70R15	98T	SL	BSW	110310	5.5-(6.5)-7.0	27	12.5	26.9	8.7	1653	44	773
	265/70R15	112T	SL	BSW	110350	7.0-(8.0)-9.0	39	13.7	29.6	10.7	2469	44	701
	185/50R16	81T	SL	BSW	138260	5.0-(6.0)-6.5	19	11.3	23.3	7.6	1019	44	891
	185/55R16	87T	XL	BSW	138220	5.0-(6.0)-6.5	20	11.3	24	7.6	1201	50	865
	195/45R16	84T	XL	BSW	138280	6.0-(6.5)-7.5	19	11.3	22.9	7.7	1102	50	907
	195/55R16	87T	SL	BSW	139140	5.5-(6.0)-7.0	21	11.3	24.4	7.9	1201	44	851
	205/55R16	91T	SL	BSW	138110	5.5-(6.5)-7.5	23	11.3	24.9	8.4	1356	44	835
16	205/60R16	92T	SL	BSW	138100	5.5-(6.0)-7.5	23	11.3	25.7	8.2	1389	44	809
	215/55R16	93T	SL	BSW	138230	6.0-(7.0)-7.5	25	11.3	25.3	8.9	1433	44	822
	215/60R16	95T	SL	BSW	138180	6.0-(6.5)-7.5	25	11.3	26.1	8.7	1521	44	795
	215/65R16	98T	SL	BSW	139010	6.0-(6.5)-7.5	27	12.5	27	8.7	1653	44	769
	215/70R16	100T	SL	BSW	138370	5.5-(6.5)-7.0	28	12.0	27.9	8.7	1764	44	745
	225/55R16	95T	SL	BSW	139150	6.0-(7.0)-8.0	25	11.3	25.7	9.2	1521	44	807
	225/70R16	107T	XL	BSW	139000	6.0-(6.5)-7.5	32	12.5	28.4	9	2149	50	731
	225/75R16	104H	SL	BSW	110400	(6.0)-7.5	32	12.5	29.3	8.8	1984	51	709
	235/70R16	106T	SL	BSW	139330	6.0-(7.0)-8.0	33	13.1	29	9.4	2094	44	717
	235/75R16	108T	SL	BSW	110410	6.0-(6.5)-8.0	34	13.1	29.8	9.3	2205	44	696
	245/70R16	111T	XL	BSW	138380	6.5-(7.0)-8.0	36	13.1	29.5	9.8	2403	50	704
	LT245/75R16	120/116Q	E	BSW	138480	6.0-(7.0)-8.0	44	15.0	30.5	9.8	3042	80	682
	255/65R16	109T	SL	BSW	110290	7.0-(7.5)-9.0	36	13.1	29.1	10.2	2271	44	715
	255/70R16	111T	SL	BSW	110390	6.5-(7.5)-8.5	38	13.1	30.1	10.2	2403	44	691
	265/70R16	112T	SL	BSW	138530	7.0-(8.0)-9.0	41	13.7	30.6	10.7	2469	44	678
17	275/70R16	114T	SL	BSW	110380	7.0-(8.0)-9.0	43	13.7	31.2	11	2601	44	666
	205/50R17	89T	SL	BSW	138270	5.5-(6.5)-7.5	23	11.3	25.1	8.4	1279	44	827
	215/40R17	87T	XL	BSW	139250	7.0-(7.5)-8.5	21	11.3	23.8	8.6	1201	50	874
	215/45R17	87T	SL	BSW	139190	(7.0)-8.0	22	11.3	24.6	8.4	1201	44	843
	215/50R17	91T	SL	BSW	138130	6.0-(7.0)-7.5	25	11.3	25.5	8.9	1356	44	814
	215/55R17	98T	XL	BSW	138120	6.0-(7.0)-7.5	26	11.3	26.3	8.9	1653	50	790
	215/60R17	100T	XL	BSW	139030	6.0-(6.5)-7.5	28	12.5	27.2	8.7	1764	50	765
	225/45R17	91T	SL	BSW	139200	7.0-(7.5)-8.5	24	11.3	25	8.9	1356	44	832
	225/50R17	94T	SL	BSW	138140	6.0-(7.0)-8.0	26	11.3	25.9	9.2	1477	44	802
	225/55R17	101T	XL	BSW	138240	6.0-(7.0)-8.0	28	11.3	26.8	9.2	1819	50	776
	225/60R17	103T	XL	BSW	139050	6.0-(6.5)-8.0	30	12.5	27.6	9	1929	50	752

Speed rated "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. Observe G3-Ice shown with winter studs. Pinned to accept TSMI #11 stud. *Inflated dimensions.

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
17	225/65R17	106T	XL	BSW	139320	6.0- (6.5) -8.0	31	11.3	28.5	9	2094	50	729
	235/45R17	94T	SL	BSW	138150	7.5- (8.0) -9.0	26	11.3	25.4	9.3	1477	44	819
	235/55R17	103T	XL	BSW	110160	6.5- (7.5) -8.5	30	12.0	27.2	9.6	1929	50	765
	235/60R17	106T	XL	BSW	139360	6.5- (7.0) -8.5	33	13.1	28.1	9.4	2094	50	739
	235/65R17	108T	XL	BSW	139020	6.5- (7.0) -8.5	34	13.1	29.1	9.4	2205	50	715
	245/40R17	95T	XL	BSW	139260	8.0- (8.5) -9.5	25	11.3	24.7	9.8	1521	50	840
	245/45R17	99T	XL	BSW	138290	7.5- (8.0) -9.0	25	11.3	25.7	9.6	1709	50	809
	245/65R17	107T	SL	BSW	139350	(7.0) -8.5	34	13.1	29.5	9.8	2149	44	704
	245/70R17	110T	SL	BSW	110370	6.5- (7.0) -8.0	37	13.1	30.6	9.8	2337	44	680
	255/65R17	114T	XL	BSW	138390	7.0- (7.5) -9.0	37	13.1	30.1	10.2	2601	50	691
	265/65R17	116T	XL	BSW	138400	7.5- (8.0) -9.5	42	13.7	30.6	10.7	2756	50	680
	275/65R17	119T	XL	BSW	110320	7.5- (8.0) -9.5	44	13.7	31.1	11	2998	50	668
18	225/40R18	92T	XL	BSW	138330	7.5- (8.0) -9.0	25	11.3	25.1	9.1	1389	50	828
	225/45R18	95T	XL	BSW	139210	7.0- (7.5) -8.5	25	11.3	25.9	8.9	1521	50	801
	225/55R18	102T	XL	BSW	138420	6.0- (7.0) -8.0	29	12.0	27.8	9.2	1874	50	748
	225/60R18	100T	SL	BSW	139060	6.0- (6.5) -8.0	30	11.3	28.6	9	1764	44	726
	225/60R18	104T	XL	BSW	138190	6.0- (6.5) -8.0	30	11.3	28.6	9	1984	50	726
	235/40R18	95T	XL	BSW	138340	8.0- (8.5) -9.5	25	11.3	25.4	9.5	1521	50	818
	235/45R18	98T	XL	BSW	138300	7.5- (8.0) -9.0	27	11.3	26.3	9.3	1653	50	789
	235/50R18	101T	XL	BSW	110180	6.5- (7.5) -8.5	30	12.0	27.3	9.6	1819	50	761
	235/55R18	104T	XL	BSW	138490	6.5- (7.5) -8.5	32	12.0	28.1	9.6	1984	50	738
	235/60R18	107T	XL	BSW	139070	6.5- (7.0) -8.5	34	13.1	29.1	9.4	2149	50	714
	235/65R18	110T	XL	BSW	110210	6.5- (7.0) -8.5	35	13.1	30	9.4	2337	50	692
	245/40R18	97T	XL	BSW	138350	8.0- (8.5) -9.5	26	11.3	25.7	9.8	1609	50	808
	245/45R18	100T	XL	BSW	138310	7.5- (8.0) -9.0	29	11.3	26.7	9.6	1764	50	779
	245/50R18	100T	SL	BSW	139180	7.0- (7.5) -8.5	31	11.3	27.7	10	1764	44	751
	245/60R18	105T	SL	BSW	110220	(7.0) -8.5	34	13.1	29.6	9.8	2039	44	703
	255/45R18	103T	XL	BSW	139220	8.0- (8.5) -9.5	30	11.3	27	10	1929	50	768
	255/55R18	109T	XL	BSW	139090	7.0- (8.0) -9.0	34	12.0	29	10.4	2271	50	716
	255/60R18	112T	XL	BSW	110140	7.0- (7.5) -9.0	37	13.1	30	10.2	2469	50	692
19	265/60R18	114T	XL	BSW	138410	7.5- (8.0) -9.5	42	13.7	30.5	10.7	2601	50	681
	275/60R18	117T	XL	BSW	110360	7.5- (8.0) -9.5	44	13.7	31	11	2833	50	670
	285/60R18	120T	XL	BSW	139080	8.0- (8.5) -10.0	47	13.7	31.5	11.5	3086	50	660
	235/50R19	103T	XL	BSW	138500	6.5- (7.5) -8.5	31	12.0	28.3	9.6	1929	50	734
	235/55R19	105H	XL	BSW	138430	6.5- (7.5) -8.5	32	12.0	29.2	9.6	2039	50	712
	245/45R19	102T	XL	BSW	138320	7.5- (8.0) -9.0	30	11.3	27.7	9.6	1874	50	751
	245/55R19	103T	SL	BSW	110300	7.0- (7.5) -8.5	34	12.0	29.6	10	1929	44	701
	255/40R19	100T	XL	BSW	139270	8.5- (9.0) -10.0	30	11.3	27	10.2	1764	50	768
	255/45R19	104T	XL	BSW	139230	8.0- (8.5) -9.5	32	11.3	28.1	10	1984	50	740
	255/50R19	107T	XL	BSW	138510	7.0- (8.0) -9.0	35	12.0	29.1	10.4	2149	50	714
	255/55R19	111T	XL	BSW	110340	7.0- (8.0) -9.0	36	12.0	30	10.4	2403	50	692
	265/50R19	110T	XL	BSW	110190	7.5- (8.5) -9.5	37	12.0	29.5	10.9	2337	50	704
	275/40R19	105T	XL	BSW	139280	9.0- (9.5) -11.0	33	11.3	27.7	10.9	2039	50	751
	275/55R19	111T	SL	BSW	110330	7.5- (8.5) -9.5	40	12.0	30.9	11.2	2403	44	672
	285/40R19	103T	SL	BSW	138360	9.5- (10.0) -11.0	34	11.3	28	11.4	1929	44	742
	285/45R19	111T	XL	BSW	131190	9.0- (9.5) -10.5	35	12.0	29.1	11.2	2403	50	714

WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE
20	235/45R20	100T	XL	BSW	138460	7.5- (8.0) -9.0	30	12.0	28.3	9.3	1764	50	733
	235/55R20	105T	XL	BSW	139170	6.5- (7.5) -8.5	34	11.3	30.2	9.6	2039	50	689
	245/40R20	99T	XL	BSW	138470	8.0- (8.5) -9.5	32	12.0	27.7	9.8	1709	50	749
	245/45R20	99T	SL	BSW	110130	7.5- (8.0) -9.0	31	12.0	28.7	9.6	1709	44	725
	255/35R20	97T	XL	BSW	139300	8.5- (9.0) -10.0	28	11.3	27	10.2	1609	50	769
	255/45R20	105T	XL	BSW	131160	8.0- (8.5) -9.5	34	12.0	29.1	10	2039	50	715
	255/50R20	109T	XL	BSW	110230	7.0- (8.0) -9.0	37	12.0	30.1	10.4	2271	50	691
	255/55R20	110T	XL	BSW	110120	7.0- (8.0) -9.0	38	12.0	31	10.4	2337	50	670
	265/40R20	104T	XL	BSW	139290	9.0- (9.5) -10.5	33	11.3	28.3	10.7	1984	50	733
	265/50R20	111T	XL	BSW	110240	7.5- (8.5) -9.5	39	12.0	30.5	10.9	2403	50	682
	275/35R20	102T	XL	BSW	139310	9.0- (9.5) -11.0	32	11.3	27.6	10.9	1874	50	754
	275/40R20	106T	XL	BSW	131200	9.0- (9.5) -11.0	34	12.0	28.7	10.9	2094	50	725
21	275/45R20	106T	SL	BSW	131180	8.5- (9.0) -10.5	36	12.0	29.8	10.7	2094	44	698
	275/50R20	109T	SL	BSW	138440	7.5- (8.5) -9.5	41	12.0	30.9	11.2	2271	44	673
	275/55R20	117T	XL	BSW	110170	7.5- (8.5) -9.5	42	12.0	31.9	11.2	2833	50	651
	275/60R20	115T	SL	BSW	110150	7.5- (8.0) -9.5	47	13.7	33	11	2679	44	630
	285/50R20	116T	XL	BSW	138520	8.0- (9.0) -10.0	42	12.0	31.3	11.7	2756	50	665
	315/35R20	106T	SL	BSW	131230	10.0- (11.0) -12.5	38	12.0	28.7	12.6	2094	44	725
	265/45R21	104T	SL	BSW	131170	8.5- (9.0) -10.0	36	12.0	30.4	10.5	1984	44	684
	285/35R21	105T	XL	BSW	131440	9.5- (10.0) -11.0	36	12.0	28.9	11.4	2039	50	720
	295/35R21	107T	XL	BSW	131220	10.0- (10.5) -11.5	38	12.0	29.1	11.9	2149	50	714
	295/40R21	111T	XL	BSW	131210	10.0- (10.5) -11.5	40	12.0	30.3	11.9	2403	50	686
	325/30R21	108T	XL	BSW	132260	11.0- (11.5) -12.0	41	12.0	28.7	13	2205	50	724
	275/40R22	107T	XL	BSW	131430	9.0- (9.5) -11.0	39	12.0	30.7	10.9	2149	50	677
22	275/50R22	111T	SL	BSW	138450	7.5- (8.5) -9.5	44	12.0	32.9	11.2	2403	44	632
	285/45R22	114T	XL	BSW	139100	9.0- (9.5) -10.5	40	12.0	32.1	11.2	2601	50	647

Speed rated "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall.
Bold designates measuring rim width. Observe G3-Ice shown with winter studs. Pinned to accept TSMI #11 stud. *Inflated dimensions.

STUDLESS LIGHT TRUCK WINTER TIRE

Tough winter jobs just got a little bit easier with the Open Country WLT1. This winter tire provides excellent winter driving capabilities for a variety of heavy-duty light trucks, including pickups, vans, and SUVs. Designed to handle the increased load-carrying capacity of these vehicles, it delivers confident ice and snow performance with long tread life.

POPULAR FITMENTS

Chevrolet Silverado 2500/3500 HD
GMC Sierra 2500/3500 HD
Ram 2500/3500
Ford F-Series
Mercedes Sprinter



Three-Peak Mountain Snowflake qualified for severe snow conditions.

WIDER TREAD FOOTPRINT

- Improves stability and handling.

WIDER DEEP GROOVES

- Increases snow traction.
- Prevents snow buildup.

INCREASED SIPE DENSITY

- Improves water evacuation and ice traction.
- Improves cornering performance on ice.

STRAIGHT SIPE AND DIMPLE DESIGN ON OUTSIDE TREAD

- Helps resist wandering.
- Improves traction in deep snow.

HEAVY-DUTY CONSTRUCTION WITH A STIFF RIGID CASING

- Meets the load-carrying, handling, and braking needs of light trucks, vans, and SUVs.
- Improves handling performance.



WHEEL DIA.	TIRE SIZE	LOAD/SPEED	LOAD ID	SIDEWALL	PRODUCT CODE	APPROVED RIM WIDTH RANGE (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS) SINGLE	MAX LOAD (LBS) DUAL	MAX PRESSURE (PSI)	REVS PER MILE
16	LT215/85R16	115/112Q	E	BSW	173100	5.5- (6.0) -7.0	39	15.9	30.4	8.9	2680	2470	80	683
	LT225/75R16	115/112Q	E	BSW	173300	(6.0) -7.0	39	16.1	29.4	8.9	2680	2470	80	707
	LT235/85R16	120/116Q	E	BSW	173200	6.0- (6.5) -7.5	45	16.1	31.9	9.3	3042	2778	80	652
	LT245/75R16	120/116Q	E	BSW	173400	6.5- (7.0) -8.0	46	16.3	30.6	9.9	3042	2778	80	680
	LT265/75R16	123/120Q	E	BSW	173500	7.0- (7.5) -8.0	48	16.5	31.7	10.7	3415	3085	80	655
	LT285/75R16	126/123Q	E	BSW	173600	7.5- (8.0) -9.0	52	16.5	32.8	11.4	3750	3415	80	633
17	LT225/75R17	116/113Q	E	BSW	174000	(6.0) -7.5	39	16.1	30.4	8.9	2755	2535	80	683
	LT235/80R17	120/117Q	E	BSW	173110	6.0- (6.5) -7.5	45	16.1	31.9	9.4	3085	2835	80	651
	LT245/70R17	119/116Q	E	BSW	173700	6.5- (7.0) -8.0	43	16.3	30.6	9.7	3000	2755	80	678
	LT245/75R17	121/118Q	E	BSW	174100	6.5- (7.0) -7.5	45	16.3	31.6	9.8	3195	2910	80	658
	LT265/70R17	121/118Q	E	BSW	173800	7.0- (8.0) -8.5	49	16.5	31.8	10.7	3195	2910	80	654
	LT285/70R17	121/118Q	E	BSW	173900	7.5- (8.5) -9.0	52	16.5	32.8	11.5	3195	2910	80	633
18	LT265/70R18	124/121Q	E	BSW	174510	7.0- (8.0) -9.0	44	16.5	32.6	10.7	3525	3195	80	636
	LT275/65R18	123/120Q	E	BSW	173120	7.5- (8.0) -9.0	49	16.5	32.3	10.9	3415	3085	80	643
	LT275/70R18	125/122Q	E	BSW	174400	7.0- (8.0) -8.5	52	16.5	33.3	10.9	3640	3305	80	624
20	LT265/60R20	121/118Q	E	BSW	174520	7.0- (8.0) -9.5	51	16.5	32.5	10.7	3195	2910	80	639
	LT275/65R20	126/123Q	E	BSW	174500	7.5- (8.0) -9.5	53	16.5	34.3	10.5	3750	3415	80	605

Speed rated "Q" = 99mph. "E" = 10-ply rating. "BSW" = Black Sidewall. Bold designates measuring rim width. *Inflated dimensions.

ORIGINAL EQUIPMENT

ORIGINAL EQUIPMENT

MODEL	MODEL YEAR	TIRE SIZE	LOAD/SPEED	TIRE NAME	PRODUCT CODE	RIM (IN.)	WEIGHT (LBS)	TREAD DEPTH (1/32")	OVERALL DIA. (IN.)*	OVERALL WIDTH (IN.)*	MAX LOAD (LBS)	MAX PRESSURE (PSI)	REVS PER MILE	UTQG	ALL-SEASON M&S
AUDI															
Q7	2016-18	255/60R18	108Y	PROXES T1 SPORT SUV A	103560	(8.0)	35	10.3	30.2	10.6	2205	51	689	240 AA	N
Q7	2016-17	285/45R20	112Y	PROXES T1 SPORT SUV B	103740	(9.0)	37	10.2	30.4	11.2	2469	50	683	240 AA	N
RS5	2012-16	265/35ZR19 XL	98Y	PROXES T1 A0	238870	9.0- (9.5) -10.5	26	9.2	26.3	10.7	1653	50	791	240 AA	N
TT	2011-16	255/35R19 XL	96Y	PROXES T1 SPORT A0	176700	8.5- (9.0) -10	26	10.0	25.9	10.2	1565	50	801	240 AA	N
TT RS	2012-16	255/35R19 XL	96Y	PROXES T1 SPORT R01	176930	8.5- (9.0) -10.0	26	9.4	25.9	10.2	1565	50	801	240 AA	N
TTS	2011-16	255/35R19 XL	96Y	PROXES T1 SPORT A0	176700	8.5- (9.0) -10	26	10.0	25.9	10.2	1565	50	801	240 AA	N

DODGE															
JOURNEY	2016-18	P225/55R19	99V	TOYO A23	140540	(7.0)	29	9.8	28.9	9.0	1709	51	720	300 A A	Y
RAM 1500 REBEL	2016-18	LT285/70R17 E/10	121/118S	OPEN COUNTRY A/T II	352430	7.5- (8.5) -9.0	56	16.3	32.8	11.5	3195	80	634	N/A	Y

FORD															
F-250/F-350 KING RANCH	2014-18	LT275/65R20 E/10	126/123S	OPEN COUNTRY A/T II	352580	7.5- (8.0) -9.5	57	16.0	34.1	11.0	3750**	80	609	N/A	Y
EXPEDITION	2017	275/55R20	113H	OPEN COUNTRY H/T D	364000	7.5- (8.5) -9.5	41	11.5	31.9	11.1	2535	51	652	300 A A	Y

INFINITI															
QX60	2016-18	235/65R18	106T	OPEN COUNTRY A25 A	301790	6.5- (7.0) -8.5	31	9.7	30.0	9.4	2094	44	692	300 A A	Y

LINCOLN															
NAVIGATOR	2017	275/55R20	113H	OPEN COUNTRY H/T D	364000	7.5- (8.5) -9.5	41	11.5	31.9	11.1	2535	51	652	300 A A	Y

MAZDA															
MAZDA CX-5	2017-18	P225/55R19	99V	TOYO A36	140630	6.0- (7.0) -8.0	29	10.2	28.8	9.0	1709	51	720	300 A A	Y
MAZDA CX-5	2013-16	P225/55R19	99V	TOYO A23	140540	(7.0)	29	9.8	28.9	9.0	1709	51	720	300 A A	Y
MAZDA3/MAZDA5	2010-16	P205/55R16	89H	TOYO A20	140500	(6.5)	23	9.4	24.7	8.4	1279	51	840	300 A A	Y
MAZDA5	2006-16	205/50R17	89V	PROXES A18	238820	5.5- (6.5) -7.5	22	10.3	25.1	8.2	1279	44	834	300 A A	Y

MITSUBISHI															
OUTLANDER/OUTLANDER SPORT	2013-18	P225/55R18	97H	TOYO A24 A	140550	(7.0)	27	10.2	27.8	9.1	1609	51	748	300 A A	Y

NISSAN															
MURANO	2016-18	235/65R18	106T	OPEN COUNTRY A25 A	301790	6.5- (7.0) -8.5	31	9.7	30.0	9.4	2094	44	692	300 A A	Y
TITAN	2017-18	P265/70R18	114S	OPEN COUNTRY A26	301870	7.0- (8.0) -9.0	40	11.0	32.6	10.7	2601	44	636	400 A B	Y

SCION															
IA	2016	P185/60R16	86H	PROXES A27	201280	(5.5)	17	9.4	24.7	7.4	1168	51	840	300 A A	Y
IM	2016	P225/45R17	90V	PROXES 4 PLUS B	177980	6.0- (7.0) -8.0	21	9.3	25.0	8.8	1323	51	830	300 A A	Y
TC	2012-16	P225/45R18	91W	PROXES A20	238900	(7.5)	24	9.7	26.0	9.1	1356	51	798	300 A A	Y

TOYOTA															
CAMRY	2017-18	215/55R17	94V	PROXES A35	238060	6.0- (7.0) -7.5	23	9.8	26.3	8.7	1477	51	791	300 A A	Y
COROLLA	2014-18	P205/55R16	89H	PROXES 4 PLUS A	177970	(6.5)	20	10.2	24.8	8.2	1279	51	836	300 A A	Y
COROLLA IM	2017-18	P225/45R17	90V	PROXES 4 PLUS B	177980	6.0- (7.0) -8.0	21	9.3	25.0	8.8	1323	51	830	300 A A	Y
HIGHLANDER	2017-18	245/55R19	103T	OPEN COUNTRY A20 B	301980	(7.5)	32	10.5	29.6	10.0	1929	44	701	300 A A	Y
HIGHLANDER	2014-16	245/55R19	103T	OPEN COUNTRY A20 B	301190	(7.5)	32	10.5	29.6	10	1929	44	701	300 A A	Y
PRIUS	2016-18	P195/65R15	89S	NANOENERGY A29	103890	6.0- (6.5) -8.0	18	9.7	25.0	8.1	1279	44	832	300 A B	Y
PRIUS	2010-16	P215/45R17	87V	PROXES A20	238880	(7.0)	21	9.7	24.7	8.6	1201	51	842	300 A A	Y
PRIUS V	2013-18	P215/50R17	90W	PROXES A20	238930	6.0- (7.0) -7.5	23	9.7	25.5	8.7	1323	51	816	300 A A	Y
RAV 4	2016-18	235/55R18	100H	OPEN COUNTRY A20	301770	6.5- (7.5) -8.5	28	10.3	28.1	9.6	1764	44	738	300 A A	Y
RAV 4	2013-15	235/55R18	100H	OPEN COUNTRY A20	301000	6.5- (7.5) -8.5	28	10.3	28.2	9.4	1764	44	738	300 A A	Y
TACOMA	2016-18	P265/65R17	110S	OPEN COUNTRY A30	310310	7.5- (8.0) -9.5	36	11.1	30.6	10.7	2337	44	680	300 A B	Y
TACOMA	2016-18	P245/75R16	109S	OPEN COUNTRY A31	310300	6.5- (7.0) -8.0	32	11.6	30.5	9.8	2271	44	682	300 A B	Y
VENZA	2010-16	P245/55R19	103S	OPEN COUNTRY A20 A	300930	(7.5)	32	10.1	29.6	9.8	1929	44	703	300 A A	Y
YARIS IA	2017-18	P185/60R16	86H	PROXES A27	201280	(5.5)	17	9.4	24.7	7.4	1168	51	840	300 A A	Y

ORIGINAL EQUIPMENT



TIRES MUST NEVER BE OPERATED IN EXCESS OF THEIR RATED SPEED LIMIT!

Exceeding the tire’s speed capability will cause overheating of the tire and sudden tire failure, possibly leading to loss of vehicle control. All Toyo passenger, light truck, and truck tires have a maximum speed rating depending on size and type. Toyo Tire U.S.A. Corp. does not endorse the operation of any vehicle in an unsafe or unlawful manner. Obey all local speed limits. Tire speed ratings do not imply that a vehicle can be safely driven at the speed for which the tire is rated. Speed ratings are based on laboratory tests that relate to performance on the road, but are not applicable if tires are underinflated, overloaded, worn out, damaged, or altered.



USE AND INSTALLATION OF WINTER (SNOW) TIRES

Winter driving presents special challenges for vehicle handling. The use of winter tires, studs, and/or chains, while improving snow traction performance, requires additional caution with regard to braking, cornering, and speed. The use of snow tires may reduce the vehicle’s handling and braking capability. It is important to drive with care not only on snow and ice, but on dry and wet roads as well. Toyo recommends that snow tires be installed in matched sets of four. This also applies for studded winter tires. When snow tires of a lower speed rating compared to the original tires are installed, the vehicle’s speed capability is reduced. Follow all recommendations in the vehicle owner’s manual regarding the use of winter tires. Consult your tire dealer for information regarding seasonal restrictions for stud usage.



PROPER SELECTION OF REPLACEMENT TIRES

Replacement tires for any vehicle must be of a size, load range, and load capacity (by inflation) that are capable of supporting the load of the vehicle’s originally installed (OE) tires. Failure to install tires with adequate load capacity will result in tire fatigue and sudden tire failure, leading to possible loss of control or an accident.

IMPORTANT! Refer to the vehicle owner’s manual for any specific safety advice regarding the application of replacement tires.



TIRE AND RIM MATCHING

NEVER MOUNT 16” RIM DIAMETER TIRES ON A 16.5” DIAMETER RIM! Any attempt to mount a 16” rim diameter tire on a 16.5” diameter rim will result in an explosion of the tire/rim assembly that can cause severe personal injury or death. Prior to mounting any 16” rim diameter tires, always check the rim/wheel identification stamp to verify the correct rim diameter. Always check the tire size molded onto the sidewall. NEVER exceed 40 psi when seating the beads on rims.

Warning for additional sizes:
To avoid an explosion of the tire/rim assembly and personal injury or death:
- **Never attempt to mount 22” rim diameter tires on any 22.5” diameter rim!**
- **Never attempt to mount 24” rim diameter tires on any 24.5” diameter rim!**



REPLACEMENT TIRES FOR LIGHT TRUCKS — P-METRIC VS. LT-METRIC

Tire installers should exercise extreme caution when replacing tires on light trucks. LT-metric type tires (e.g., LT265/75R16) may not offer adequate load capacity when replacing P-metric type tires (e.g., P265/75R16), depending on the vehicle’s load requirements and the tire’s load/ply rating. **LT-metric type tires require much higher air pressures to carry equivalent loads of P-metric tires.**

If P-metric type tires are used to replace LT-metric tires, installers should verify the load requirement of the vehicle by checking the tire information placard. Always make sure that replacement tires offer equal or greater load capacity (by inflation) compared to the originally installed tires.

If P-metric or metric tires are intended to replace originally installed LT-metric type tires, the load capacity of the P-metric tire is reduced by 9% at any inflation value. Consult manufacturer’s load and inflation charts.



Always stand well clear of any tire mounting operation. This is especially important when the service operator inflates the tire. If the tire has been improperly mounted, it may burst with explosive force, causing serious personal injury or death. **A new valve must be installed on the rim each time a worn-out passenger or light truck tire is replaced.**



Removing and replacing tires on wheels can be dangerous. Attempting to mount tires with improper tools or procedures may result in a tire explosion, causing serious personal injury or death. This is a job for your authorized Toyo Tire dealer or other qualified tire service location only.



NOTE TO PROFESSIONAL TIRE INSTALLERS: Exceeding the maximum bead seating pressure. The tire service person must **NEVER INFLATE BEYOND 40 POUNDS PRESSURE TO SEAT BEADS** unless specified by the tire manufacturer! **NEVER STAND, LEAN, OR REACH OVER THE ASSEMBLY DURING INFLATION!**

****IF REPLACING FEWER THAN FOUR (4) TIRES****
IMPORTANT!

In some cases, the vehicle manufacturer may specifically advise against replacing fewer than all four tires. Always check and follow the recommendations in the vehicle owner’s manual. For 4WD and AWD vehicles, even small differences in outside diameter may cause drive-train damage or mechanical malfunction.

When replacing tires on a vehicle, it is recommended and preferred that all four tires be replaced at the same time for continued optimal vehicle performance. However, for those cases where this is not feasible, below are some general guidelines to consider when replacing fewer than four tires for a light vehicle, whether it is one or two tires. If the vehicle manufacturer has alternate recommendations, always follow their recommendations.

REPLACING TWO (2) TIRES — When a pair of replacement tires is selected in the same size and construction as those on the vehicle, the two newer tires must be installed on the rear axle. All tires must be the same speed rating and must be of equal or higher speed rating than the tire that came as original equipment on the vehicle. New tires with deeper tread will provide better grip and evacuate water more effectively, which is important as a driver approaches (wet) hydroplaning situations. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.

REPLACING ONE (1) TIRE — Replacing a single tire on a vehicle can have an adverse effect on suspension systems, gear ratios, transmission, and tire treadwear. If single-tire replacement is unavoidable, it is recommended that the single new tire be paired with the tire that has the deepest tread depth and both be placed on the rear axle. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.

CONSUMER ADVISORY



TSD-12-012


February 2014

ROLLOVER PROPENSITY OF LIFTED LIGHT TRUCKS



Consumers should be aware that the installation of larger-diameter tires, including off-road type tires, combined with modified suspensions (lift kits) for increased off-road ground clearance will adversely affect the handling and maneuverability characteristics of the vehicle compared to the factory-equipped (original) vehicle.

When vehicles, especially light trucks, are lifted, the center of gravity is heightened, thus making them more prone to rollover. Rollover propensity is further increased with full passenger and/or cargo loads. Other aspects of handling and maneuverability may also be affected by altering the original manufacturer's design.

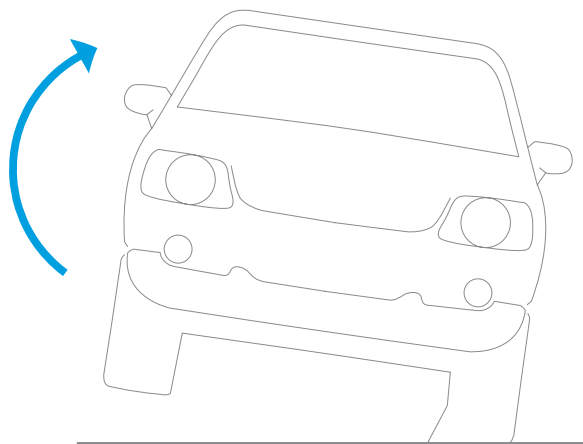

As with any vehicle, Extreme Care must be used to prevent loss of control or rollover during sharp turns or abrupt maneuvers.

Always wear seat belts and drive safely, recognizing that reduced speeds and specialized driving techniques may be required.



The installation of larger tire and wheel combinations will reduce the effectiveness of anti-lock braking systems and increase stopping distance.

Failure to safely drive any vehicle equipped with a lift kit may result in an accident resulting in serious injury or death.

Do not drive a lifted vehicle unless you are familiar with its unique handling characteristics and are confident of your ability to maintain control under all driving conditions. Some modifications (and combinations of modifications) are not recommended and may not be permitted in your state.

Consult your owner's manual, the instructions accompanying the lift kit, and state laws before undertaking any vehicle suspension modifications.

You are responsible for the legality and safety of the vehicle you modify using lift-kit and tire modifications.

CONSUMER ADVISORY



TSD-17-001

October 2017

RECOMMENDATIONS ON THE PROPER USE AND HANDLING OF CERTAIN TOYO TIRES

This advisory supersedes TSD-09-001, dated May 29, 2009, and applies only to the following products:

- | | | | |
|-----------------|------------------|-------------------|----------------|
| All Proxes® RR | All Proxes® RS1 | All Proxes® RA1 | All Proxes® TQ |
| All Proxes® R1R | All Proxes® R888 | All Proxes® R888R | |

This advisory addresses the proper use and handling of these tires in colder climates. Tires exposed to temperatures below 15°F (-9°C) will lose rubber compound flexibility. Under certain conditions, they may even experience cracking (see image below).



The rubber compounds used in these tires have unique properties that, when compared to other tires, can cause them to lose some of their flexibility when used or handled in conditions below 15°F (-9°C). This loss in flexibility can lead to potential cracking and other damage to the tire.

TO MINIMIZE THE CHANCES OF THIS HAPPENING, CONSUMERS AND INSTALLERS ARE ADVISED TO FOLLOW THESE INSTRUCTIONS:

1. Do not move or operate the car with these tires in conditions below 15°F (-9°C). **ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!**
2. Avoid moving these tires in conditions below 15°F (-9°C).
3. Before mounting or dismounting, store these tires for at least 24 hours in a temperature-controlled environment of 68°F (20°C) or warmer, and **ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!**
4. Remove these tires from the vehicle and deflate to half the normal air pressure during prolonged periods of non-use or storage.

TECHNICAL BULLETIN



TSD-12-005

LOAD CAPACITY OF TOYO PROXES® TQ™ TIRES

Toyo Tire U.S.A. Corp. is introducing the following sizes in the Proxes TQ product line that are designed using the Light Load (LL) standard of the Tire and Rim Association (T.R.A.);

- P275/45R16 94 LL
P275/40R17 93 LL
- P315/35R17 93 LL
P345/40R17 106 LL
- P315/35R18 95 LL

LOAD IDENTIFICATION:

Under the T.R.A.'s designation, tire load is divided into three categories: Light Load (LL), Standard Load (SL), and Extra Load (XL). Each refers to the tire's ability to carry a certain load at a given air pressure. Tires designed for LL, SL, and XL duty are usually identified as such on the tire sidewall.



Figure 1—Light Load molded into sidewall

CAUTION A Light Load tire carries less load at the same inflation pressure and has a lower maximum load capacity than the equivalent Standard Load size. Figure 2 below shows the different load capacities of the three different categories of tires of the same size.

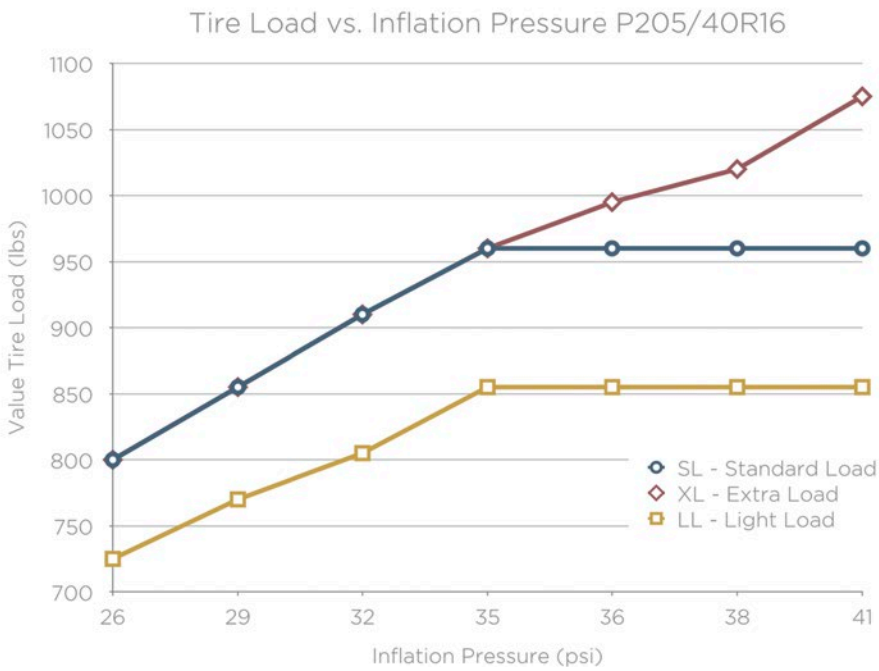


Figure 2—Tire Load vs. Inflation chart

GENERAL ADVICE FOR DETERMINING CORRECT INFLATION PRESSURE:

“Plus size” tires, including the subject tires, may require higher inflation pressures than what is indicated on the vehicle Tire Information Placard or in the vehicle Owner’s Manual. Any “plus size” tire should be inflated to a pressure that provides equal or greater load capacity compared to the original equipment (OE) tire. Always refer to tire industry load and inflation tables to determine correct inflation values when installing “plus sizes,” or contact Toyo Tires for assistance.



Always observe this advice to avoid overloading the tire. Tire overload will contribute to tire fatigue and eventual tire failure. Tire failure may lead to an accident, which may result in injury or death.

Single Load per tire in pounds

Size	Tire Load Limit at Various Cold Inflation Pressures					
	PSI	26	29	32	35	36
P275/45R16 94LL	lbs.	1,190	1,279	1,356	1,433	1,477
P275/40R17 93LL	lbs.	1,235	1,301	1,367	1,433	—
P315/35R17 93LL	lbs.	1,246	1,323	1,378	1,433	—
P345/40R17 106LL	lbs.	1,687	1,808	1,929	2,039	2,094
P315/35R18 95LL	lbs.	1,224	1,312	1,400	1,477	1,521

Figure 3—T.R.A. Load & Inflation Table

QUICK REFERENCE GUIDE — LIGHT TRUCK/SUV/CUV

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	LOAD ID	OPEN COUNTRY MT	OPEN COUNTRY RT	OPEN COUNTRY CT	OPEN COUNTRY AT II	OPEN COUNTRY HT	OPEN COUNTRY QT	PROXES ST III	PROXES ST	CELSIUS CUV	M-55
15	PAGE		10-13	14-15	34-35	16-19	20-23	24-27	28-29	30-31	32-33	36-37
	P215/75R15											
	LT215/75R15	C										
	P225/70R15											
	P225/75R15											
	P235/70R15											
	P235/75R15											
	LT235/75R15	C										
	P265/70R15											
	P265/75R15											
	30X9.5R15LT	C										
	31X10.5R15LT	C										
	33X10.5R15LT	C										
	33X12.5R15LT	C										
	33X13.5R15LT	C										
16	35X13.5R15LT	C										
	37X14.5R15LT	C										
	215/65R16											
	215/70R16											
	P215/70R16											
	LT215/85R16	E										
	225/70R16											
	P225/70R16											
	P225/75R16											
	LT225/75R16	E										
	235/60R16											
	P235/65R16											
	P235/70R16											
	P235/75R16											
	LT235/85R16	E										
	P245/70R16											
	P245/75R16											
	LT245/75R16	C										
	LT245/75R16	E										
	255/65R16											
	P255/70R16											
	LT255/85R16	E										
	P265/70R16											
	P265/75R16											
	LT265/75R16	C										
17	LT265/75R16	E										
	LT265/75R16	E										
	P275/70R16											
	LT285/75R16	C										
	LT285/75R16	E										
	LT295/75R16	E										
	LT305/70R16	E										
	LT315/75R16	E										
	LT385/70R16	D										
	225/55R17											
	225/60R17											
	225/65R17											
	LT225/75R17	E										
	235/55R17											
	235/60R17											
	P235/60R17											
	235/65R17											
	P235/65R17											
	P235/70R17											
	P235/75R17											
	LT235/80R17	E										
	P245/65R17											
	P245/70R17											
	LT245/70R17	E										
	P245/75R17											
	LT245/75R17	E										
18	255/60R17											
	P255/65R17											
	P255/70R17											
	LT255/75R17	C										
	225/55R18											
	235/55R18											
	235/60R18											
	235/65R18											
	P235/65R18											
	245/60R18											
	P245/60R18											
	255/55R18											
	255/60R18											
	P255/65R18											
	LT255/65R18	E										
19	255/70R18											
	P255/70R18											
	265/60R18											
	P265/60R18											
	P265/65R18											
	P265/70R18											
	LT265/70R18	E										
	P275/60R18											
	P275/65R18											
	LT275/65R18	C										
	LT275/65R18	E										
	LT275/70R18	E										
	285/60R18											
	LT285/60R18	E										
	LT285/65R18	E										

"C" = 6-ply rating, "D" = 8-ply rating, "E" = 12-ply rating, "F" = 12-ply rating.

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE — LIGHT TRUCK/SUV/CUV

WHEEL DIA.	TIRE SIZE	LOAD ID	OPEN COUNTRY MT	OPEN COUNTRY RT	OPEN COUNTRY CT	OPEN COUNTRY AT II	OPEN COUNTRY HT	OPEN COUNTRY QT	PROXES ST III	PROXES ST	CELSIUS CUV	M-55
20	235/55R20											
	P235/55R20											
	245/50R20											
	P245/50R20											
	245/60R20											
	255/45R20											
	255/50R20											
	255/55R20											
	P255/55R20											
	265/45R20											
	265/50R20											
	LT265/60R20	E										
	275/40R20											
	275/45R20											
	275/55R20											
	LT275/55R20	D										
	P275/60R20											
	LT275/65R20	E										
	285/50R20											
	LT285/55R20	E										
	LT285/60R20	E										
	295/40R20											
	295/45R20											
	LT295/55R20	E										
	LT295/60R20	E										
	LT295/65R20	E										
	305/50R20											
	LT305/55R20	E										
	LT305/55R20	F										
	315/35R20											
	LT315/60R20	E										
	LT325/60R20	E										
	33X12.5R20LT	E										
	33X12.5R20LT	F										
	33X12.50R20LT	F										
	35X12.5R20LT	E										
	35X12.5R20LT	F										
	35X12.50R20LT	F										
	35X13.5R20LT	E										
	35X13.50R20LT	F										
	37X12.5R20LT	E										
	37X13.5R20LT	E										
	38X13.5R20LT	D										
	38X15.5R20LT	D										
	40X15.5R20LT	D										
22	265/35R22											
	265/40R22											
	285/35R22											
	285/40R22											
	285/45R22											
	P285/45R22											
	295/30R22											
	295/35R22											
	305/40R22											
	305/45R22											
	LT325/50R22	E										
	335/25R22											
	33X12.5R22LT	E										
	33X12.50R22LT	F										
	35X12.5R22LT	E										
	35X12.5R22LT	F										
	35X12.50R22LT	F										
	37X12.5R22LT	E										
	37X12.50R22LT	F										
	37X13.5R22LT	E										
24	40X15.5R22LT	D										
	285/35R24											
	285/40R24											
	295/30R24											
	305/35R24											
	37X13.5R24LT	E										
	40X15.5R24LT	E										

QUICK REFERENCE GUIDE — PASSENGER CAR

WHEEL DIA.	TIRE SIZE	PROXES I	PROXES RTR	PROXES T1 SPORT	PROXES TTR	PROXES 4 PLUS	PROXES R888	PROXES R888R	PROXES RR	PROXES RAI	PROXES RS1	PROXES TD	VERSADO NDR	VERSADO EDO	CELSIUS	EXTENSA HP II	EXTENSA MS
	PAGE	42-43	44-45	46-47	48-49	50-53	58-59	56-57	60-61	62-63	64-65	66-67	72-73	74-75	80-81	76-77	78-79
13	P155/80R13																
	P175/70R13																
	185/60R13																
	P185/70R13																
	205/60R13																
	225/45R13																
14	P175/65R14																
	185/60R14																
	P185/60R14																
	185/65R14																
	P185/65R14																
	P185/70R14																
	P185/75R14																
	195/60R14																
	P195/70R14																
	P195/75R14																
	205/55R14																
	P205/70R14																
15	P205/75R14																
	P215/70R14																
	P215/75R14																
	225/50R14																
	175/65R15																
	185/55R15																
	185/60R15																
	P185/60R15																
	185/65R15																
	P185/65R15																
	195/45R15																
	195/50R15																
	195/55R15																
	195/60R15																
	P195/60R15																
	195/65R15																
	P195/65R15																
	205/50R15																
	205/60R15																
	P205/60R15																
	205/65R15																
	P205/65R15																
	205/70R15																
	P205/70R15																
	205/75R15																
	P205/75R15																
16	P215/60R15																
	P215/65R15																
	215/70R15																
	P215/75R15																
	225/45R15																
	225/50R15																
	225/60R15																
	225/70R15																
	P225/70R15																
	P225/75R15																
	235/50R15																
	235/75R15																
	P235/75R15																
16	185/55R16																
	195/50R16																
	195/55R16																
	P195/55R16																
	205/45R16																
	205/50R16																

QUICK REFERENCE GUIDE — PASSENGER CAR

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	PROXES I	PROXES RTR	PROXES T1 SPORT	PROXES TTR	PROXES 4 PLUS	PROXES R088	PROXES R088R	PROXES RR	PROXES RAI	PROXES RS1	PROXES TTD	VERSADO NOIR	VERSADO ECO	CELSIUS	EXTENSA HP II	EXTENSA MS
16	PAGE	42-43	44-45	46-47	48-49	50-53	58-59	56-57	60-61	62-63	64-65	66-67	72-73	74-75	80-81	76-77	78-79
	205/55R16																
	P205/55R16																
	205/60R16																
	P205/60R16																
	205/65R16																
	P205/65R16																
	215/55R16																
	215/60R16																
	P215/60R16																
	215/65R16																
	225/45R16																
	225/50R16																
	225/55R16																
	P225/55R16																
	225/60R16																
	P225/60R16																
	225/65R16																
	235/60R16																
	P235/60R16																
	235/65R16																
	245/45R16																
	245/50R16																
	255/50R16																
	P255/50R16																
	P275/45R16																
17	205/40R17																
	205/45R17																
	205/50R17																
	215/45R17																
	P215/45R17																
	215/50R17																
	P215/50R17																
	215/55R17																
	P215/55R17																
	215/60R17																
	P215/60R17																
	215/65R17																
	P215/65R17																
	225/45R17																
	225/50R17																
	P225/50R17																
	225/55R17																
	P225/55R17																
	225/60R17																
	P225/60R17																
	235/40R17																
	235/45R17																
	235/50R17																
	235/55R17																
	245/35R17																
	245/40R17																
	245/45R17																
	245/50R17																
	255/40R17																
	255/45R17																
	265/40R17																
	275/40R17																
	P275/40R17																
	315/35R17																
	P315/35R17																
	P345/40R17																

QUICK REFERENCE GUIDE

QUICK REFERENCE GUIDE — PASSENGER CAR

WHEEL DIA.	TIRE SIZE	PROXES 1	PROXES RTR	PROXES T1 SPORT	PROXES T1R	PROXES 4 PLUS	PROXES R888	PROXES R888R	PROXES RR	PROXES RAI	PROXES RS1	PROXES T10	VERSADO NOIR	VERSADO ECO	CELSIUS	EXTENZA HP II	EXTENZA MS
	PAGE	42-43	44-45	46-47	48-49	50-53	58-59	56-57	60-61	62-63	64-65	66-67	72-73	74-75	80-81	76-77	78-79
19	305/30R19																
	315/25R19																
	325/30R19																
	345/30R19																
	225/30R20																
20	225/35R20																
	235/30R20																
	245/30R20																
	245/35R20																
	245/40R20																
	245/45R20																
	255/30R20																
	255/35R20																
	255/40R20																
	255/45R20																
	275/30R20																
	275/35R20																
	275/40R20																
	285/25R20																
	285/30R20																
	285/35R20																
	295/25R20																
	295/30R20																
	305/25R20																
	305/30R20																
	305/35R20																
	315/25R20																
	315/30R20																
	315/35R20																
	325/25R20																
	325/30R20																
	345/25R20																
21	255/30R21																
	285/30R21																
	295/25R21																
	235/30R22																
	245/30R22																
22	255/30R22																
	255/35R22																
	265/30R22																
	265/35R22																
	285/25R22																
	285/30R22																
	295/25R22																
	305/25R22																
	255/30R24																
	P275/25R24																
24	275/30R24																

• Available in Proxes 4.

QUICK REFERENCE GUIDE — WINTER

WHEEL DIA.	TIRE SIZE	LOAD ID	OBSERVE GSJ-5	OBSERVE GARIT KX	OBSERVE GS-ICE	OPEN COUNTRY WRTT	CELSIUS	CELSIUS COW
	PAGE		86-89	90-91	92-95	96-97	80-81	32-33
13	155/80R13							
	175/70R13							
	175/65R14							
	175/70R14							
	185/60R14							
14	185/65R14							
	185/70R14							
	195/60R14							
	195/70R14							
	P205/75R14							
	145/65R15							
	175/55R15							
	175/65R15							
	185/55R15							
	185/60R15							
15	185/65R15							
	195/50R15							
	195/55R15							
	195/60R15							
	195/65R15							
	205/60R15							
	205/65R15							
	205/70R15							
	P205/70R15							
	205/75R15							
	P205/75R15							
	215/60R15							
	215/65R15							
	215/70R15							
	P215/75R15							
	225/70R15							
	P225/75R15							
	225/80R15							
	235/75R15							
	265/70R15							
	265/75R15							
	175/80R16							
	185/50R16							
	185/55R16							
	P185/60R16							
16	195/45R16							
	195/50R16							
	195/55R16							
	205/50R16							
	205/55R16							
	205/60R16							
	205/65R16							
	P205/70R16							
	215/55R16							
	215/60R16							
	215/65R16							
	215/70R16							
	215/75R16							
	LT215/85R16	E						
	225/50R16							
	225/55R16							
	225/60R16							
	225/65R16							
	225/70R16							
	225/75R16							
	LT225/75R16	E						
	235/60R16							
	235/65R16							

"E" = 10-ply rating.

QUICK REFERENCE GUIDE — WINTER

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	LOAD ID	OBSERVE GSI-5	OBSERVE GARD RX	OBSERVE G3-ICE	OPEN COUNTRY WLT	CEL SIUS	CEL SIUS CUV
16	235/70R16							
	235/75R16							
	LT235/85R16	E						
	245/70R16							
	245/75R16							
	LT245/75R16	E						
	255/65R16							
	255/70R16							
	265/70R16							
	265/75R16							
	LT265/75R16	E						
	275/70R16							
	LT285/75R16	E						
	205/50R17							
17	215/40R17							
	215/45R17							
	215/50R17							
	215/55R17							
	215/60R17							
	P215/65R17							
	225/45R17							
	225/50R17							
	225/55R17							
	225/55R17							
	225/60R17							
	225/65R17							
	LT225/75R17	E						
	235/45R17							
	235/50R17							
	235/55R17							
	235/60R17							
	235/65R17							
	LT235/80R17	E						
	245/40R17							
	245/45R17							
	245/65R17							
	P245/65R17							
	245/70R17							
	LT245/70R17	E						
	LT245/75R17	E						
	255/60R17							
	255/65R17							
	P255/70R17							
	265/65R17							
	265/70R17							
	LT265/70R17	E						
	275/65R17							
	P285/70R17							
	LT285/70R17	E						
18	215/50R18							
	P215/55R18							
	225/40R18							
	225/45R18							
	225/50R18							
	225/55R18							
	225/60R18							
	235/40R18							
	235/45R18							
	235/50R18							
	235/55R18							
	235/60R18							
	235/65R18							
	P235/65R18							
	245/40R18							
	245/45R18							

"E" = 10-ply rating.

QUICK REFERENCE GUIDE

WHEEL DIA.	TIRE SIZE	LOAD ID	OBSERVE GSI-5	OBSERVE GARD RX	OBSERVE G3-ICE	OPEN COUNTRY WLT	CEL SIUS	CEL SIUS CUV
18	245/50R18							
	245/60R18							
	255/45R18							
	255/55R18							
	255/60R18							
	P255/65R18							
	P255/70R18							
	265/60R18							
	265/65R18							
	P265/70R18							
	LT265/70R18	E						
	275/60R18							
	P275/65R18							
	LT275/65R18	E						
19	LT275/70R18	E						
	285/60R18							
	P225/55R19							
	235/50R19							
	235/55R19							
	245/40R19							
	245/45R19							
	245/55R19							
	P245/55R19							
	255/40R19							
	255/45R19							
	255/50R19							
	255/55R19							
	P255/60R19							
	265/50R19							
	275/40R19							
	275/55R19							
20	285/40R19							
	285/45R19							
	235/45R20							
	235/55R20							
	P235/55R20							
	245/40R20							
	245/45R20							
	P245/50R20							
	255/35R20							
	255/45R20							
	255/50R20							
	255/55R20							
	265/40R20							
	265/50R20							
	P265/50R20							
	LT265/60R20	E						
	275/35R20							
21	275/40R20							
	275/45R20							
	275/50R20							
	275/55R20							
	275/60R20							
	P275/60R20							
	LT275/65R20	E						
	285/50R20							
	315/35R20							
	265/45R21							
22	285/35R21							
	295/35R21							
	295/40R21							
	325/30R21							
	275/40R22							