

# 3" Side Bar

## Part No. 1170710061/3

Fits: 2006-2011 **Hummer H3** 











30-60 min

Required

Required



READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.

REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.



DO NOT OVER TORQUE. STANDARD OPERATING LOAD FOR TIGHTEN BODY MOUNT NUTS & BOLTS VARIES FROM 45 TO 65 FOOT POUND.

PARTS LIST:					
Qty	Part Description	Qty	Part Description		
1 Set	Side Bar	8	3/8"-16 x 11/5" Hex Flange Bolt		
1 Set	Front Bracket B (lateral symmetry)	8	3/8"-16 x 1" Hex Head Bolt		
1Set	Rear Bracket A (lateral symmetry)	16	3/8" Flat Washer		
16	3/8" Lock Washer				

DRIVER (LEFT) FRONT	DRIVER (LEFT) REAR	PASSENGER (RIGHT) REAR	PASSENGER (RIGHT) FRONT


### **INSTALLATION PROCEDURE**



**IMPORTANT:** A magnetic pick up tool is recommended to assist with the installation.

- 1. Remove the end caps on the side bars before beginning installation.
- 2. Locate the correct Side Bar and set of Brackets referenced to the illustration. (See Illustration).
- 3. Install mount bracket to frame using hardware as shown in figure. After you reading these steps, please refer to the installation drawing.
- 4. Recheck bolts periodically.

Rev 010115 Page 1 of 3

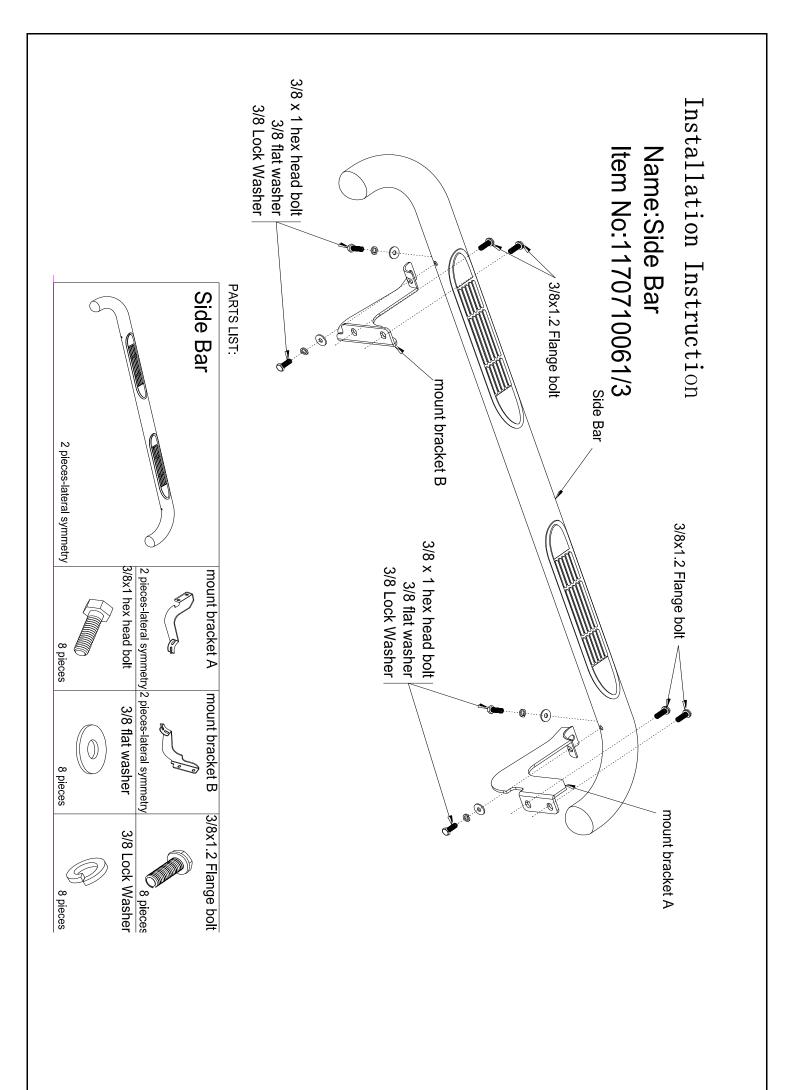


Page 2 of 3 Rev 010115

### PARTS IDENTIFICATION GUIDE

Driver Side tube taped in "Red" Color. Passenger Side tube taped in "Blue" Color.

No.	Parts Identification		
1	Passenger / Right 'Rear' Bracket marked "RR"		
2	Driver / Left 'Rear' Bracket marked "RL"		
3	Passenger / Right 'Center' Bracket marked "CR"		
4	Driver / Left 'Center' Bracket marked "CL"		
5	Passenger / Right 'Front' Bracket marked "FR"		
6	Driver / Left 'Front' Bracket marked "FL"		
7	'Left' marked "L"		
8	'Right' marked "R"		
Note:			

- This guide is to identify the parts and not a reference for part count.
- Product / Bracket image is for representative purpose only.
- Actual design may vary based on application.
- Refer Parts List for Hardware.

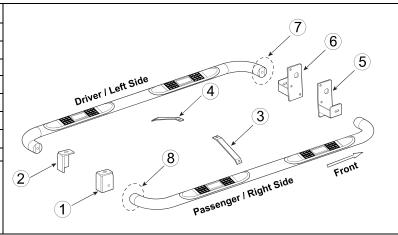

### PRODUCT CARE

- Periodically check the product to ensure all fasteners are tight and components are intact.
- Regular waxing is recommended to protect the finish of the product.
- Use ONLY Non-Abrasive automotive wax. Use of any soap, polish or wax that contains an abrasive is detrimental and can scratch the finish leading to corrosion.
- Aluminum polish may be used to polish small scratches and scuffs for Stainless Steel finish.
- Mild soap may be used to clean the product for both Stainless Steel and Black finish.

### FAQ's

### 1. Hardware's are not of correct size.

In GMC / Chevrolet truck model 2006 & up, customer needs to reuse the factory body bolts to install the bracket. If your vehicle is not GMC / Chevrolet 2006 & up, ensure that holes are not partially covered with any plastic grommet or rust? If it is, remove the plastic grommet & rust from the thread holes & re-try the installation.

### Mounting Bracket are not getting Installed properly.

In some cases Illustration images shown in Installation manual may not be the exactly same as per actual vehicle images ,also if Driver / Passenger side mounting brackets are very identical in the design, suggest referring Parts Identification guide to avoid fitment issue.

### Products are thumping / rattling after installation.

Ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.

### Side Bar is not aligning with vehicle / Step Pads are not aligning with vehicle doors.

Side bar may be interchanged or mounting brackets are not installed at the correct position in the vehicle. Refer Parts identification guide.

### 5. Missing / Excess Hardware.

Recheck hardware count as per the part list.

### Product not installing properly.

Ensure make model year, cab length and bed size of your vehicle is listed in the application. All installation steps are followed correctly.

Page 3 of 3 Rev 010115