

HIGH PERFORMANCE LIGHTING



# VW TIGUAN 2016+ MOUNTING SOLUTIONS

FITTING INSTRUCTIONS



# **TECHNICAL SUPPORT**

For additional support, please contact us by email: sales@triple-r-lights.com


# WHAT'S REQUIRED

- 2x ST4 EVOLUTION LED LIGHTS
- 1x ONE/TWO LAMP HARNESS KIT
- 1x CANBUS HIGHBEAM INTERFACE
- 1x VW TIGUAN (2016+) MOUNTING KIT

## **DIFFICULTIY LEVEL**



# **TOOLS REQUIRED**

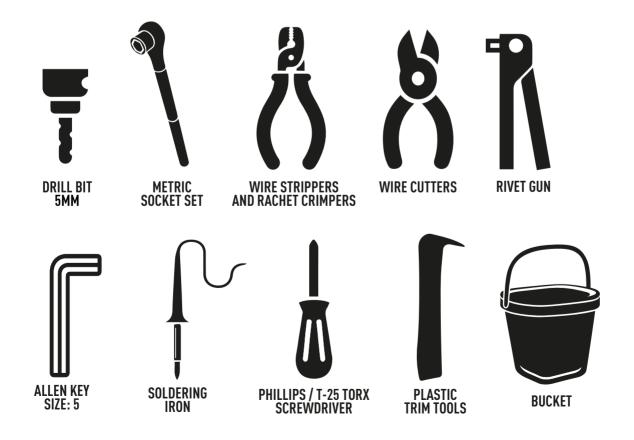



# PRE-INSTALLATION CHECKS

1. Ensure battery is disconnected.

## **BUMPER REMOVAL**



#### STEP 1



Undo the 4x T25 screws holding in the grille.



## STEP 2



Gently pull the grille from the bumper and move onto slam panel. Do not un-plug!



## STEP 3

Undo the hidden T25 on both sides that secure bumper.



## STEP 4

Gently pull the front wheel arch trims forward to give access to the bumper retaining screws.



## STEP 5

Undo the bottom and middle T25 screws from the wheel arch lining.



# BUMPER REMOVAL CONT.



# STEP 6

Undo the T25 screw on the back of the front bumper.



#### STEP 7

Locate and undo the hidden T25 screw in the top of the bumper.



## STEP 8

Gently release the sides of the front bumper.



## STEP 9

Pull bumper forward and unplug the front fog lights.



## STEP 10

Get a bucket ready and release the front headlight washer pipes catching the washer fluid at the same time.

The bumper can now be removed.



# MOUNTING YOUR LIGHT(S)




## STEP 1

Mount the Centre Mounts (supplied with each lamp) to the bumper beam brackets as shown. The centre bracket should sit in between the 3rd and 4th mounting holes.



## STEP 2



From the centre of the bumper measure 90mm for where the brackets will be mount.





## STEP 3

Drill 2x 5mm holes through the bumper beam and rivet the brackets in place



## STEP 4

Slide both ST4's on to the centre mounts and position them as shown, then tighten the M5 grub screws on the centre mounts.



# **WIRING UP YOUR LIGHT**

Please note: Vehicle battery will need to be removed for this process.

#### **IMPORTANT INFORMATION!**

When you start any VW MY06+ after having the battery disconnected the dashboard will display multipule errors.

To reset the errors please follow steps below:

- 1: TURN ENGINE ON
- 2: TURN WHEELS FULL LOCK TO LEFT
- 3: TURN WHEELS FULL LOCK TO RIGHT
- 4: SWITCH IGNITION OFF
- 5: RESTART VEHICLE AND ERRORS WILL DISAPPEAR



#### STEP 1

Locate the cable entry grommet that is usually hidden by the vehicle battery.



#### STEP 2

Feed the thin red cable from the wiring kit through the cable entry grommet.



#### STEP 3

Locate the cable inside the vehicle which feeds through the cable grommet to the footwell.





# STEP 4



Carefully remove climate control facia.

Then pull out the x4 retaining plugs to release the climate panel.



# STEP 5

Locate the 2 Can wires in the larger black plug.

Orange/Green = Can Hi Orange/Brown = Can Lo



#### STEP 6



Connect wireless reader or CanM8 white and blue wires to the vehicle CAN wires according to Hi/Lo.



## STEP 7

Feed Red wire up to climate panel area.



## STEP 8

Connect thin red wire from the wiring kit to purple wire from CanM8.





#### STEP 9

Find a suitable Live and Ground for CanM8. This can be found behind the radio.

Mount the CanM8 under the radio.



## STEP 10

Relocate battery but leave disconnected.

Drill a hole and secure the relay with a self tapping screw as shown.



#### STEP 11

Feed the lamp connector(s) through to the front of the bumper and connect to the light(s).

## **INSTALLATION CHECKS**

- 1. Ensure battery is re-connected properly and check for any errors on the dashboard.
- 2. Test light bar is working fully before re-assemblying vehicle.



## WWW.TRIPLE-R-LIGHTS.COM

sales@triple-r-lights.com
Triple-R Lights LLC, 16192 Coastal Highway,
Lewes, Delaware, 19958, USA

