



The Finest Roll Covers & Accessories on Earth!



Installation Manual

Roll Cover Installation Procedure



TOOLS NEEDED FOR INSTALLATION

- Power Hand Drill
- Hole Saw (1-1/4 inch/32 mm) - For drain hose holes
(1 inch for certain models with composite beds – no grommets needed)
- Carpet Knife/Scissors - To cut drain hose sections
- Wrench (Spanner) (9/16 open/ring) - To tighten clamps
- 3/8" or 10mm Socket - For lid screws
- 1/8" Drill Bit - For pilot hole for lock block screws
- Screw Driver (Phillips head) - For lock block screws; self-tapping screws for L brackets on Dodge Models/special models
- 7/16" Wrench - For strike plate nuts
- Note: All screws provided in kit.
- T27 Torx (for Sport Trac models only)
- Tape Measure
- Rust Preventative – For drain hose holes

ITEMS PROVIDED FOR INSTALLATION

- (1x) Canister with Roll-on Curtain includes end slat with lock
- (1x) Canister Lid
- (2x) Cover Keys Attached to Canister Bracket
 - Remove before installation
- (1x) Side Rail Assembly LH
- (1x) Side Rail Assembly RH
- (1x) Drain Hose
- Shims Package (varies from model to model)
- (4x) Drain Hose Grommets
- (Extra Shortbed = 4x / Shortbed = 6x / Longbed = 8x) Side Rail Clamps
- (4x) Lid Screws (black flange screws)
- (2x) Lock Block Screws
- (4x) Lid Screw Caps
- (1x) Foam Weather Strip

● 2002-UP DODGE RAM MODELS

- (1x) Canister Support Bracket LH/(Left) L Bracket
- (1x) Canister Support Bracket RH/(Right) L Bracket
- (8x) Self-Tapping Screws (To secure L Brackets/4 each side)



● 2005-UP TOYOTA TACOMA MODELS

- Four (4) - Six (6) Special Bolts and Nylon Nuts (4 for Shortbed, 6 for Longbed) which are utilized for installation of the rails in place of the regular clamps. These bolts fit perfectly into the rail system of the Tacoma models and are then used to secure the side rails.
- The rails are provided with the Four (4) - Six (6) special mounting brackets already installed.

● 2007-UP FORD SPORT TRAC MODELS

- Four (4) Torx button machine screws are provided for this install. They each come with a heavy duty washer which gets screwed into the existing holes in the truck bed, one in the rear and one at the half way point on each side. The side rails come with the brackets secured in fixed positions which will line up with the fixed holes in the truck bed.

● SPECIAL INSERTS MAY BE PROVIDED FOR CERTAIN OTHER MODELS.

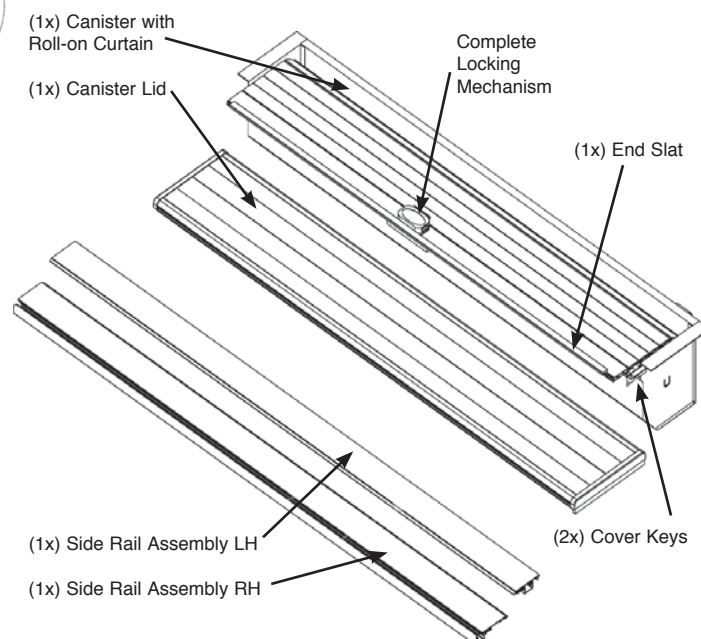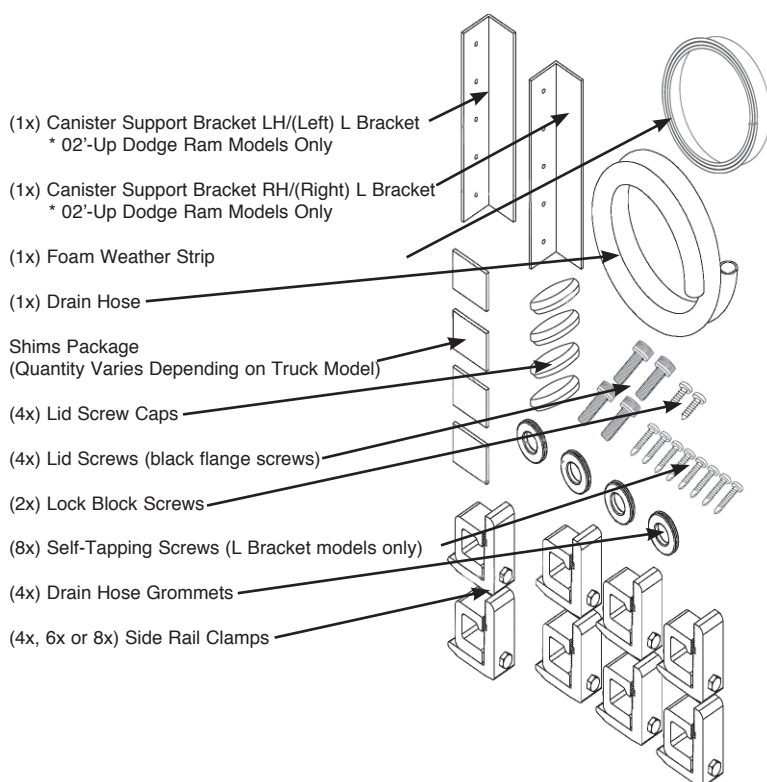

2. Unpacking and Preparing to Install Roll Cover

Note: Manufacturer recommends two people for certain steps of installation.

1. Locate spacious workspace.
2. Inspect condition of the box.
If there is any visible damage to the packaging we have informed our Dealers/customers not to accept delivery of the cover unless they are certain that no concealed damage has occurred to the product. Manufacturer accepts no responsibility for damage in shipping once cover is accepted.
3. Confirm the make, model, and color marking on the box. The description should match the correct vehicle.
4. CAREFULLY REMOVE THE PROTECTIVE PACKING.
5. Compare contents with items provided for installation on page 2. II

Note: Extra Shortbed = Four (4) Clamps, Shortbed = Six (6) Clamps, Longbed = Eight (8) Clamps. Dodge Ram models (2002 & Up) are the only models that require Canister Support Brackets/L Brackets. Toyota Tacoma models (2005 & Up) are the only models that require Special Bolts and Nylon Nuts. Ford Sport Trac Models (2007-Up) are the only models that require Special Button Socket Cap Screws (use existing holes in bed).

6. Lay items provided for installation out in a orderly fashion.
7. VERIFY TOOLS NEEDED FOR INSTALLATION (PAGE 2)
8. To prevent damage to the vehicle's paintwork, prepare vehicle for installation by covering the truck bed floor and open tailgate with protective covering (cardboard or blanket).


3. Standard Fitting Instructions

For 2002-Up Dodge Ram Models, 2005-Up Toyota Tacoma Models, 2007-Up Ford Sport Trac Models, 2004-Up Nissan Titan Models or 2005-Up Nissan Frontier Models refer to the Special Installation Fitting Instructions on page 10 for additional installation instructions before proceeding.

Note: Canister comes with drain plugs already installed. Do not remove protective foam covering drain plugs until ready to install drain hoses.

A. Fitting the Canister with Roll Curtain


- Remove the keys from the Canister Bracket and store safely.
- Insert the canister into the truck bed with the lips of the canister resting on both sides of the truck bed (Fig. 1).
- Firmly push the canister with Roll-on curtain up against the face of the front panel of the truck bed.
- Position the canister in the CENTER of the bed. Incorrect positioning of the canister may cause damage to the Roll Cover.
- Foam Weather Strip - a piece of foam weather strip is provided with each cover. This foam weather strip is to be used only in the event that a gap is found between the canister and the front panel of the truck bed. It is difficult to gauge if the foam weather strip is necessary until positioning the canister. The foam weather strip is used to make up the difference in height spacing in trucks with plastic bed caps, etc. and when necessary to fill gap for an extra seal (meets metal up front behind the truck cab). All models differ with age and configuration in the need for the foam weather strip. The foam weather strip should be adhered to the truck bed unless you have a spray on bed liner and then you will need to adhere it to the underside of the canister lip since it will not stick to the spray on bed liner material.

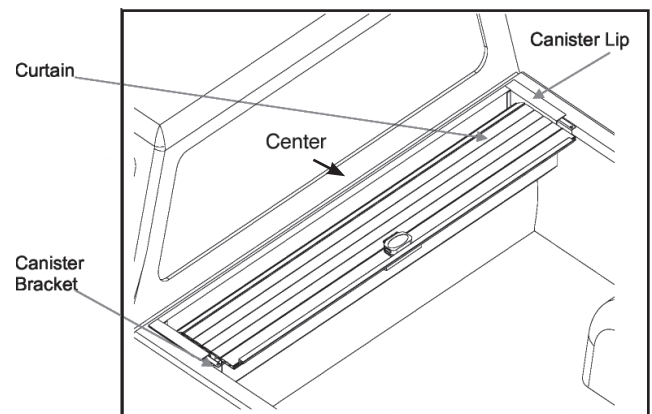

(Fig. 1)

B. Fitting the Side Rails (start with clamps at tailgate first)


Note: Do not remove the tape protecting the powder coating on the upper side until installer has completed the install and prior to installing the lid.

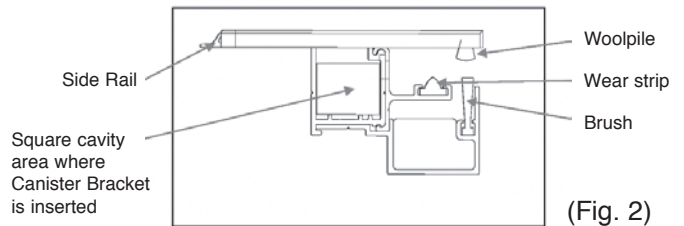


(Fig. 2)

- Locate the square cavity (Fig. 2) in the “LH” side rail and insert the “LH” rail bracket of the canister into this area sliding the “LH” side rail forward until it is up against the canister. The left drain channel on the side rail must protrude into the canister. The “LH” side rail can be moved back and forth as long as the drain channel remains in the canister. (Fig. 3) – Allows extra adjustment for side rails at tailgate.
- Locate the square cavity in the “RH” side rail and insert the “RH” rail bracket of the canister into this area sliding the “RH” side rail forward until it is up against the canister. The right drain channel on the side rail must protrude into the canister. The “RH” side rail can be moved back and forth as long as the drain channel remains in the canister. (Fig. 3) – Allows extra adjustment for side rails at tailgate.
- Check to ensure that the nylon wheel in the canister turns freely and is not jammed by the drain channel.

Note: Curtain cannot be pulled until the side rails have been secured with the clamps and leveled. It is suggested that at least one clamp at each end near the tailgate position be secured before pulling the curtain to check installation and leveling of the rails. Unsecured and improperly installed side rails may cause damage to the side rails and curtain. Please be careful when rolling cover back into canister so as not to damage curtain. Insert lock protection to underside of lock area (cardboard underneath) whenever rolling cover back into the canister until the lid has been fully installed.

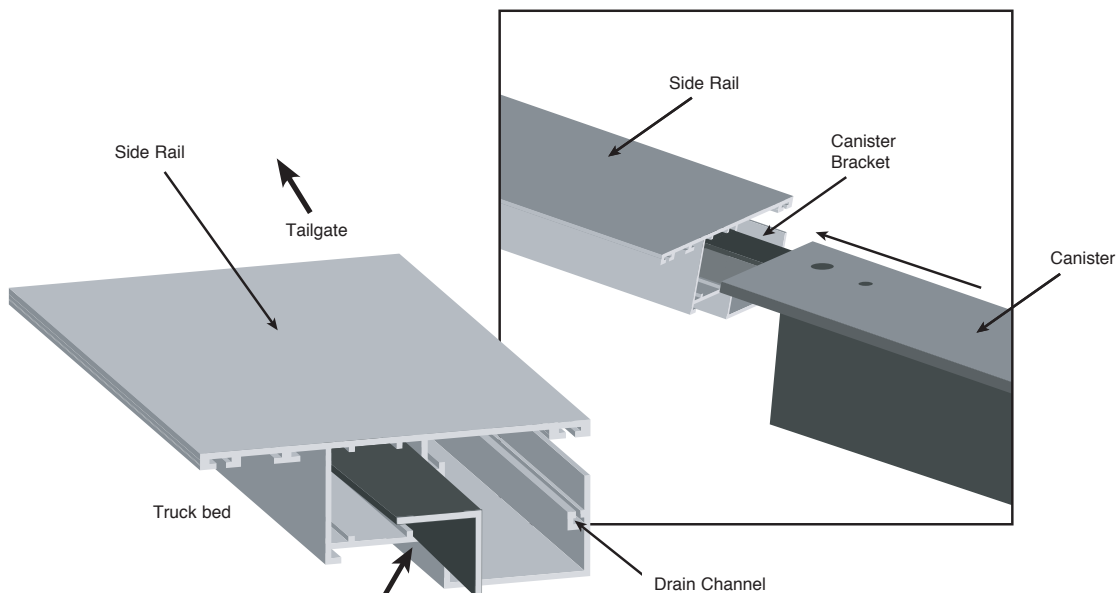

(Fig. 3)

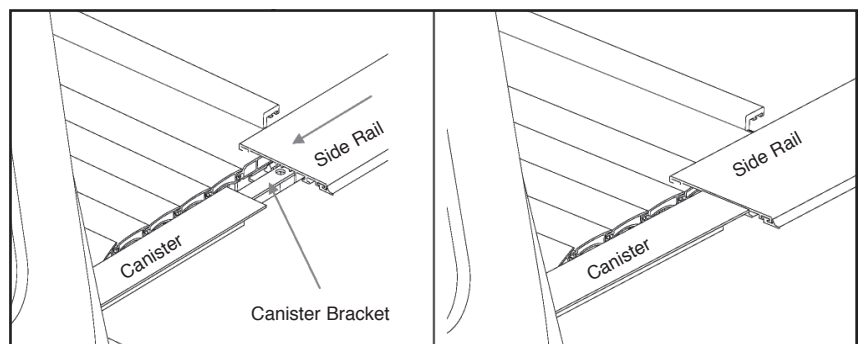

B. Fitting the Side Rails (continued)

Note: Tailgate is to remain down until rails are inserted into canister bracket. Close tailgate carefully to begin clamping side rails. (Fig. 4a)


- Measure end slat (see Note below) adding 1/8" to total which will give you the perfect gap between the side rails (1/16" on each side).
- Before clamping, close the tailgate of the truck carefully making sure not to hit the rail end caps. It is suggested that clamping be done with tailgate closed to ensure proper side rail installation. Side rails should clear tailgate and not overlap more than 3/8 inch.
- Using one (1) side rail clamp and shim(s) (amount of shims varies from model to model), clamp the side rail clamp and the shim(s) at the left rear of the truck bed.
- Using one (1) side rail clamp and shim(s) (amount of shims varies from model to model), clamp the side rail clamp and the shim(s) at the right rear of the truck bed.
- Always use the correct amount of shims (this varies from truck model to truck model) – under-shimming can cause your rails to bow in.
- The clamps will hold the side rails in place so you can unroll the curtain to ensure that the curtain lines up with the side rails at the tailgate. If two people are installing the side rails, one should pull the rail tightly into the truck bed while the other installs the clamps (Fig. 4a). Two people recommended for first clamp at tailgate for both side rails.
- With the tailgate closed, adjust the side rails to extend up to 3/8" (10mm) onto the tailgate. (Fig. 4b)



(Fig. 4a)

Note: The most critical gap for your rail fitting is at the tailgate. The perfect gap (width) is the distance measured of the raised end slat (slat with lock portion) with an added 1/16 inch for the right and 1/16 inch for the left. This should be the measured gap between your side rails at the tailgate of the truck (Fig. 5). You will need to choose the correct amount of shims to achieve this gap – once shimmed, secure your clamps on each side of the rails at the tailgate end. Once you have achieved this "perfect" gap at the tailgate and your rails are sitting level – it is just a matter of shimming the other clamping positions and clamping them down. All clamping should be alternated left to right. Do not clamp one side rail completely before the other. Alternate clamping will help to keep your rails positioned properly.

- If you have opened the tailgate during clamping, please close the tailgate carefully making sure not to hit the rail end caps.
- Then feed the cover into the rails and remove the lock protection. PLEASE NOTE IF YOU NEED TO RETURN THE COVER INTO THE CANISTER – REPLACE THE LOCK PROTECTION BEFORE DOING SO TO AVOID DAMAGE TO ANY SLATS. LOCK PROTECTION IS NOT NECESSARY ONCE THE CANISTER LID IS FULLY INSTALLED.
- Using the pull strap (attached to the under side of the curtain), pull the curtain along the side rails checking for sufficient clearance between the curtain and the side rail to prevent damage to the side rails.
- With the tailgate closed, the end slat of the curtain should come over the tailgate not more than (10mm) 3/8 inch.
- If you are certain your rails are installed accurately, you can install the Canister Lid (Section C) at this point if necessary.
- Very carefully allow the curtain to retract back into the canister (put lock protection under the lock).
- Insert a piece of cardboard between the underside of the lock and the curtain to prevent damage. LOCK PROTECTION IS NOT NECESSARY ONCE THE CANISTER LID IS FULLY INSTALLED.
- Draw out the curtain to ensure that it runs free of obstruction.

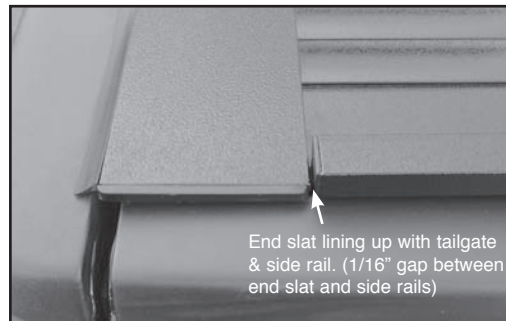


(Fig. 4b)


Note: If you find your rails are not sitting level, you need to check your SHIMS. Not the amount of shims, but the way they are installed. On all truck beds you will find that the profile of the metal has a bump at the top of the bed and then it recesses in. What you want to achieve is a vertical surface for the rails to clamp against (SEE Fig. 6). This is achieved by putting the smallest shim below the bump followed by a larger shim in front – thus, creating the vertical surface necessary.

Note: If you are working with plastic bed caps – you may need to put a small shim between the plastic and the metal bed rail below the bump to achieve the vertical surface necessary as well and prevent the rails from tilting into the bed.

Note: IF YOUR RAILS ARE LEVEL – NO ADJUSTMENT IS NECESSARY!

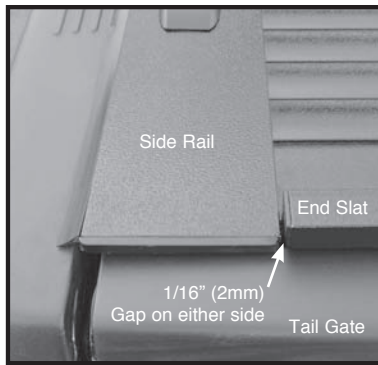

(Fig. 5)

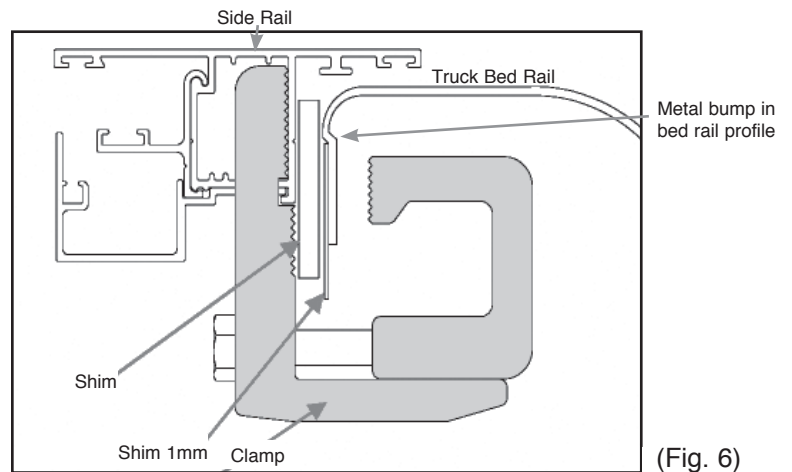

(Fig. 6)

B. Fitting the Side Rails (continued)

SHIMMING IS VERY IMPORTANT - Shims help you achieve the correct gap between the side rails!

Note: Once the tailgate clamps have been installed and the perfect gap has been achieved, the rest of the shimming and clamping is preset and you are merely filling in the gaps.

- Insert shims from the tailgate toward the canister by using the same size Shims on opposing sides at each clamped position. (tapered bed will use more shims)
- Install side rail clamps and shims – **ALTERNATING LEFT TO RIGHT SIDE UNTIL ALL CLAMPS ARE INSTALLED.**
- Make sure all clamps are secure and tightened.
- If the correct amount of shims are not used, it is possible to bend the rails – therefore, it is extremely important to fill the gaps before clamping with the appropriate amount of shims once you have leveled your rails.


Note: When clamping, shims must always be included. Shims allow for secure installation of the side rails. Shims of varying sizes are included in your Shims Package. As noted above, always use the smallest shim to fill the bump and then start with your next size up shim to fill the gap to achieve vertical surface (Fig 6.)

SHIMS GO AT EACH CLAMPING POSITION – between side rail and bed rail.

- **OPTIONAL** (Extremely wet conditions) – Seal the area where the drain protrudes into the canister (on the outside of the canister) with silicone sealer if necessary. (Fig. 7).


C. Fitting the Canister Lid

- Draw out and lock the curtain in place.
- Remove the protective tape from the side rails.
- Place the canister lid over the canister at the front of the truck bed.
- Check to ensure the canister lid is positioned evenly on either side on the truck bed. The end slat bump rubber should face the tailgate of the vehicle (Fig. 8).
- Line up the holes on the canister with the holes on the lid.
- Using the lid screws (4x black flange screws), secure the lid into position and place on the lid screw caps (4x).

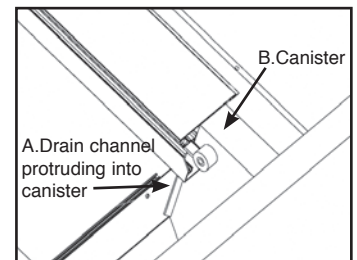

(Fig. 7)

Note: Press down on Canister Lid while tightening lid screws to insure correct fitting. Do not over tighten the lid screws.

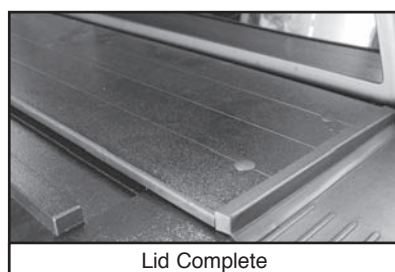



(Fig. 8)

D. Adjusting the Locking Position (Two people recommended) - NEVER REMOVE CENTER SCREW OF LOCK MECHANISM.

- Draw out the curtain until the end slat is level with the rear of the side rail. SIDE RAIL POSITIONS MUST BE CORRECT TO CONTINUE. Ensure that the curtain is snug up against the tailgate (side rails & curtain should line up as close as possible).
- Locate the side rail lock screw in the elongated hole at the bottom of the curtain. (Fig. 9) Shows the rear bottom view of the side rail where the side rail lock block adjustment screw is located.
- Adjust screw in the elongated hole on the underside of the side rail. Slide the screw which moves the lock block.
- Open the tailgate and move the lock block toward the tailgate until it is firmly against the extended lock bars while the cover lines up with the side rails.
- Check to ensure that the end slat remains lined up with the side rails. (Fig. 4b)
- Tighten the adjustment screw securing the lock block in place.
- Close the tailgate, making sure locking position is snug against tailgate and working properly before proceeding.
- Operate the locking mechanism (work the cover a few times to check adjustment if necessary).
- Once the correct locking position is located, secure the lock block. In order to secure lock positions, it is necessary to drill a pilot hole into the nylon lock block through the pre-drilled hole in the aluminum. The pilot hole is necessary to allow you to screw in the lock block screw easily. (Fig. 10).
- Check to ensure the end slat is in the locked position.

Note: Lock block needs adjustment in order to line the curtain up with the side rails at the tailgate. Once the correct locking position is located, proceed to drill the pilot hole necessary to secure the lock block in place (Fig. 10).

(Fig. 9)

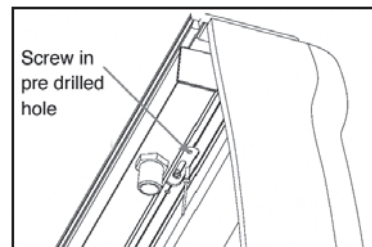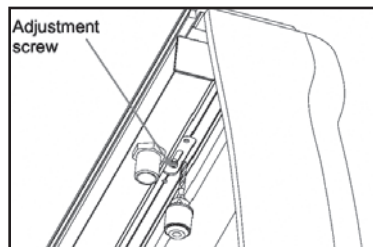

(Fig. 10)

E. Fitting the Drain Hoses

Note: The following models only have one drain position in the canister (centered) – CR503 (Nissan Frontier S/B 2000-2004); CR243 (Chevy S-10 & GMC Sonoma S/B 1999-Up); CR260 (Chevy Colorado & GMC Canyon S/B 2004-Up); CR442 (Toyota Tacoma L/B 2005-Up); CR443 (Toyota Tacoma S/B 2005-Up); CR441 (Toyota Tacoma S/B 1995-2004).


Note: 1 inch hole saw should be used for certain models with composite beds without the use of a grommet. Drain hose should be inserted directly into 1 inch hole.

- Unlock the curtain and fully open the cover.
- Mark an appropriate spot on the truck bed approximately 5" (127mm) directly below the rear drain plugs installed at rear of each side rail at tailgate. Each truck model will have different drilling positions to avoid damage.
- With the 1.25" (32mm) Hole Saw, drill a hole through the inside panel of the truck bed (and liner) beneath the drain plugs at the position you marked (Fig. 12).


Note: The position of the hole is optional and can be positioned wherever the customer prefers it to be as long as it drains out of the truck bed. The manufacturer recommends hole location to be in an area where the drain holes will not be damaged by normal use yet high enough to avoid load damage. Care must be taken not to damage the outside of the truck bed. It is important to get a positive water flow through the drain hose.

- Apply Rust Preventative (NOT SUPPLIED) wherever drilling occurred in the truck bed.
- Fit two (2) Drain Hose Grommets in the drilled holes (Fig. 13).
- Cut a suitable length of drain hose and push one end through the hole in the grommet and the other end over the drain plug. (Fig 14)




Note: The angle of the hose should not be less than 90 degrees to ensure a positive flow of any water. Ensure that the drain hose is not pushed up against the outer panel of the truck bed. Both situations may cause blockage during wet weather.

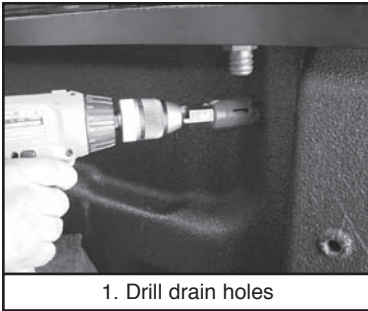

(Fig. 12)

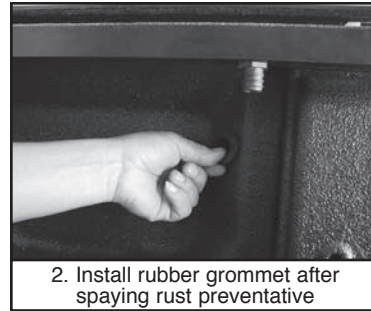

(Fig. 13)

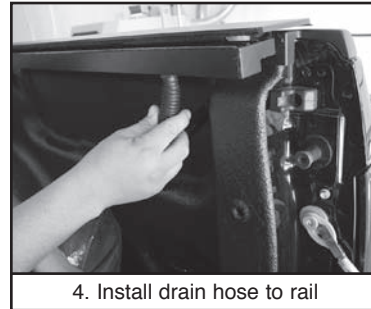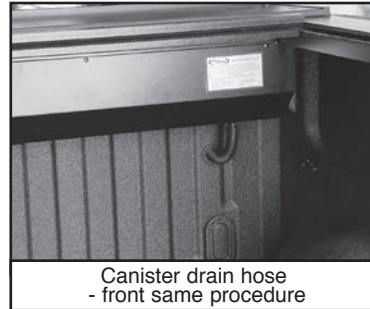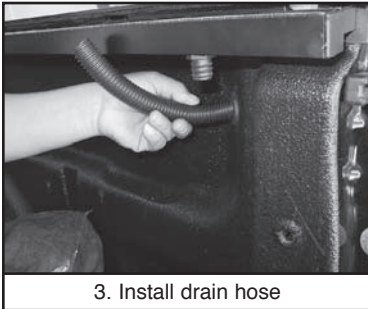

(Fig. 14)

1. Drill drain holes

2. Install rubber grommet after
spraying rust preventative

3. Install drain hose

Canister drain hose
- front same procedure

4. Install drain hose to rail

E. Fitting the Drain Hoses (continued)

- Locate the two drain holes on the bottom of the canister and remove foam packing around drain plugs.
- Repeat the above procedure.

Note: The holes in the body should be drilled, where possible, through the front wall of the truck bed (Fig. 14). If that is not possible, the side panels may be used. **EXTREME CARE SHOULD BE TAKEN NOT TO DRILL THROUGH OR DAMAGE ANY CRITICAL PART OF THE VEHICLE.**

F. Additional Information

Pull Strap – Attached to the Roll Cover pull strap is a Velcro holder pad. Position near the tailgate on underside of side rail for ease of reach. The pad provides easy access to the pull strap and holds the pull strap inside the truck bed area when the vehicle is being driven with the Roll Cover open.

- Make sure you position the velcro pad on the under side of the drain channel and secure it.
- Always make sure the pull strap is secured and check the velcro pad periodically for damage.

WARNING:

ALWAYS SECURE THE PULL STRAP TO THE HOLDER PAD (VELCRO PAD). AN UNSECURED PULL STRAP WITH THE ROLL COVER OPEN MAY CAUSE SEVERE DAMAGE OR INJURY. THE MANUFACTURER RECOMMENDS THAT THE ROLL COVER BE CLOSED AND SECURED WHILE DRIVING WHEN POSSIBLE.



Unlocking & Opening Cover – You must relieve the tension on the cover slightly before turning the key or operating the keyless entry. Just pull the raised end slat toward you slightly and this relieves the tension to operate the lock properly.

Curtain Tension Adjustment – Needs to be performed by qualified installer as the curtain is under tension and can cause serious injury

4. Strike Plate Installation

Install the Strike Plate – Only once the Cover has been completely fitted to bed.

1. Install the complete Cover, including the Lid, as per the Installation Manual making all necessary adjustments and start with the cover in fully open position.
2. Now pull the Curtain into the first locking position so you can gain access to the key guard.
3. While maintaining the Curtain in this position, remove only the one nut on the Canister Centre that has nothing hanging on it. [The other nut has a bracket (Strike Plate) hanging on it].
4. Swivel the bracket (Strike Plate) and insert it onto the stud where you removed the nut in step #3, and place nut back onto this stud, and fasten in order to clamp the Strike Plate onto the canister firmly.
5. Fasten the other nut on Strike Plate and ensure both are tight and holding the Strike Plate firmly onto the Canister.
6. Now release the Curtain so that it retracts into the fully open position (up against the canister lid), towards the Strike Plate you have just installed.
7. When the Cover reaches the fully opened position, you should hear the lock and locking bars being released (Click), and you can now pull the curtain in the normal way to close the cover.
8. Your cover is now ready to use, and will automatically lock every 12" (in predetermined positions) until it reaches the final locking position at the tailgate. A key is only necessary to unlock the Cover.
9. When opening the cover using the key, pull the cover off the locked position slightly to release the tension and the locking bars – then turn the key from the 9o'clock position to the 12o'clock position (1/4 turn) until you hear the lock click – then return to the 9o'clock position and remove the key!

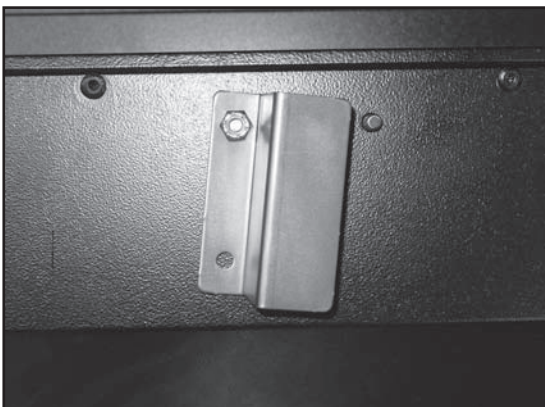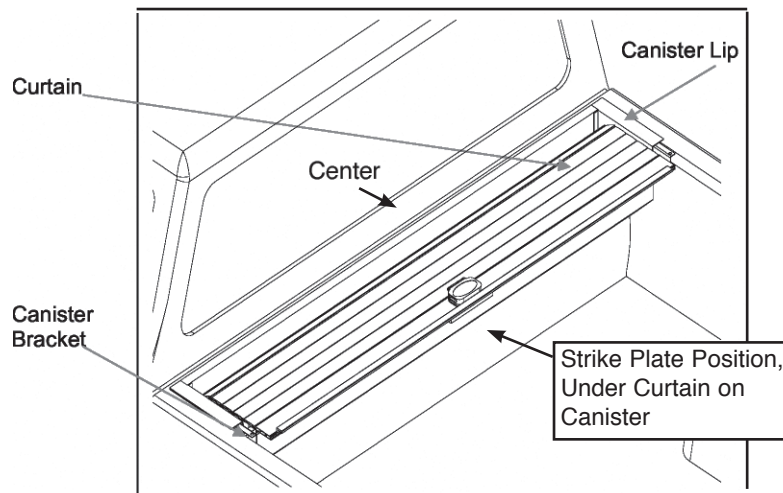


5. Special Installation Fitting Instructions

Note: Only these models require special installation instructions. For all other models, follow standard fitting instructions. SPECIAL INSTALLS STILL REQUIRE SHIMMING.

A. 2002-Up Dodge Ram Models

Tapered truck beds (Dodge Ram Models) – Vehicles with excessively tapered truck beds (the width of the truck bed behind the cab is greater than the width of the truck bed at the tailgate), must have additional brackets fitted. L Brackets are supplied.

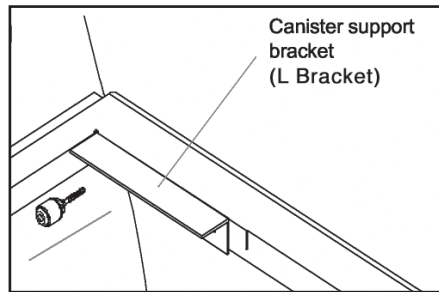

(Fig. 15)



- Position the canister support brackets (one left and one right) at the front of the truck bed (Fig. 15).
- Align canister support brackets with the top of the truck bed rail.
- Secure the brackets to the truck bed with the self-tapping screws provided in the kit. To secure the brackets, you must use four (4) stainless steel self-tapping screws per bracket.
- Proceed with the standard installation (see Standard Fitting Instructions, page 3).

Note: Insure brackets are level or a minimum of 1mm above (but never below) the bed rail to ensure correct positioning of the side rails. The brackets should be parallel with the inside of the bed rail. If the brackets are lower than the bed rail the side rails will pull inward making it difficult to level them.

B. 2005-Up Toyota Tacoma Models

The following steps must be taken in order to install a Truck Covers USA American Roll Cover on the 2005 & up models of the Toyota Tacoma w/utility rails:

- The American Roll Cover from Truck Covers USA for the Toyota Tacoma w/utility rails will come complete with four (4) - six (6)* special bolts and nylon nuts which are utilized for installation of the rails in place of the regular clamps provided with most other models. The rails are provided with the four (4) - six (6)* special mounting brackets already installed. These bolts slide perfectly into the rail system of your Tacoma and are then used to secure the side rails of your American Roll Cover.

Proceed with the standard installation (see Standard Fitting Instructions, page 3). Please remember that you are losing the function of the Toyota factory utility rail.

C. 2007-Up Ford Sport Trac Models

Four (4) Torx button machine screws are provided for this install. They each come with a heavy duty washer which gets screwed into the existing holes in the truck bed, one in the rear and one at the half way point on each side. The side rails come with the brackets secured in fixed positions which will line up with the fixed holes in the truck bed.

Proceed with the standard installation (see Standard Fitting Instructions, page 3).

D. 2004-Up Nissan Titan Models

The following steps must be taken in order to install a Truck Covers USA American Roll Cover on the 2004 & up models of the Nissan Titan:

STEP ONE: The manufacturer installed utility rails need to be removed & reinstalled upside down on both truck bed sides using the lower holes. You will utilize only 2 of the existing 4 holes/bolts when reinstalling the rails upside down (two per side).

STEP TWO: Now that you have taken the necessary step to lower the factory utility rails - you are now ready to install the American Roll Cover per the installation instruction manual. You are now sporting the finest roll cover on earth and also are left with the ability to use at least 2 (one left/one right) of the utility rail tie-downs Nissan provided with your Titan.

Proceed with the standard installation (see Standard Fitting Instructions, page 3).




5. Special Installation Fitting Instructions (continued)

E. 2005-Up Nissan Frontier Models

The following steps must be taken in order to install a Truck Covers USA American Roll Cover on the 2005 & up models of the Nissan Frontier:

STEP ONE: The manufacturer installed utility rails need to be removed & reinstalled AFTER notching out an upper portion for the four (4) clamping positions of the American Roll Cover. It is extremely IMPORTANT to mark the position of the notches to be cut out of both utility rails. You will then reinstall the utility rails in their original position on both sides of the truck bed before beginning installation of the American Roll Cover.

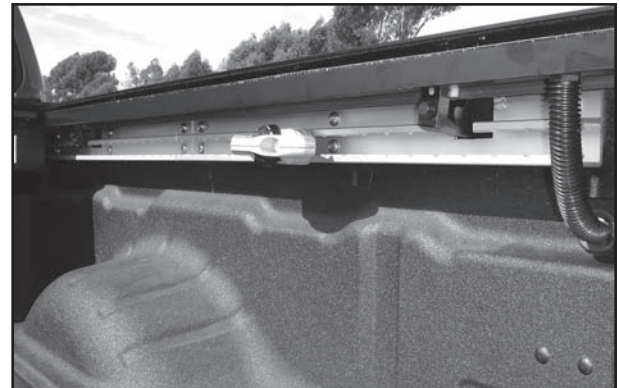

STEP TWO: Now that you have taken the step necessary to make the slight modifications to the factory utility rails - you must place the tie-downs inside the rails in a position where they are between both notches for both clamps on each side (the tie-downs do not have the ability to pass by the American Roll Cover clamping system).

STEP THREE: You are now ready to install the American Roll Cover per the installation instruction manual. You are now sporting the finest roll cover on earth and also are left with the ability to use all four anchor points of the utility rail tie-downs Nissan provided with your Frontier.

Proceed with the standard installation (see Standard Fitting Instructions, page 3).

6. Maintenance

The Roll Cover was designed for ease of operation, low maintenance, and minimal service requirements. To ensure a long, trouble free life of the Roll Cover, it is important to follow the instructions below:

- Leaves, Dirt, Debris, etc. should be removed from the top of the cover if evident before opening.
- Never apply any kind of grease, lubricants, sprays or oil-based products to any part of the roll cover.
- Use only mild soap and water to wash the cover. Never use any Chemicals, polishes or waxes on any part of the Roll Cover.
- In extreme dry conditions, silicone spray may be used inside the side rails to help the cover slide & operate more freely.

Note: IF CURTAIN DOES NOT ROLL FREELY – YOU MAY CHECK FOR OBSTRUCTION AND REMOVE ANY FOUND. A SILICONE SPRAY MAY BE USED FROM TIME TO TIME TO SPRAY INTO THE SIDE RAILS TO HELP THE COVER SLIDE & OPERATE MORE FREELY. IF CURTAIN STILL DOES NOT ROLL FREELY – TENSION MAY NEED TO BE ADDED TO THE SPRING. WE SUGGEST THIS ONLY BE DONE BY A CERTIFIED INSTALLER. NEVER FORCE COVER OPEN OR CLOSED.




7. AMERICAN WORK COVER (TOOLBOX) INSTALLATION INSTRUCTIONS:

ITEMS PROVIDED

- (1x) Toolbox
- (2x) Trays
- (2x) J-Hooks
- (2x) Black Flange Screws

1. Toolbox is to be positioned and centralized up front on truck bed.
2. Foam weather strip may be necessary between the toolbox and the front of the bed rail (behind the cab) with the toolbox installation as well. Check the gap to see if the foam weather strip is needed.
3. Take the canister and pull the cover out slightly, letting the lock position/end slat portion hang slightly. Now slide the canister under the toolbox as far as it will go. Then make sure the holes in the canister line up with the hole in the toolbox and secure canister to toolbox on both sides with the black flange screws provided. (Do not fully tighten – just secure).
4. Then take the J Hooks supplied and secure the toolbox to the truck bed rail through pre-drilled holes in toolbox on both sides (Do not fully tighten – just secure).
5. Then install the side rails (see Fitting Side Rails section of Installation Manual). Be sure to lift toolbox slightly and ensure curtain slides into side rail. Once you have installed the side rails and positioned them correctly, go back and tighten the canister screws to the toolbox and J Hooks to truck bed rails.
6. Proceed back to standard Installation Manual instructions for remainder of install.
7. In most cases, one j-hook and one black flange screw per side is all that is necessary.

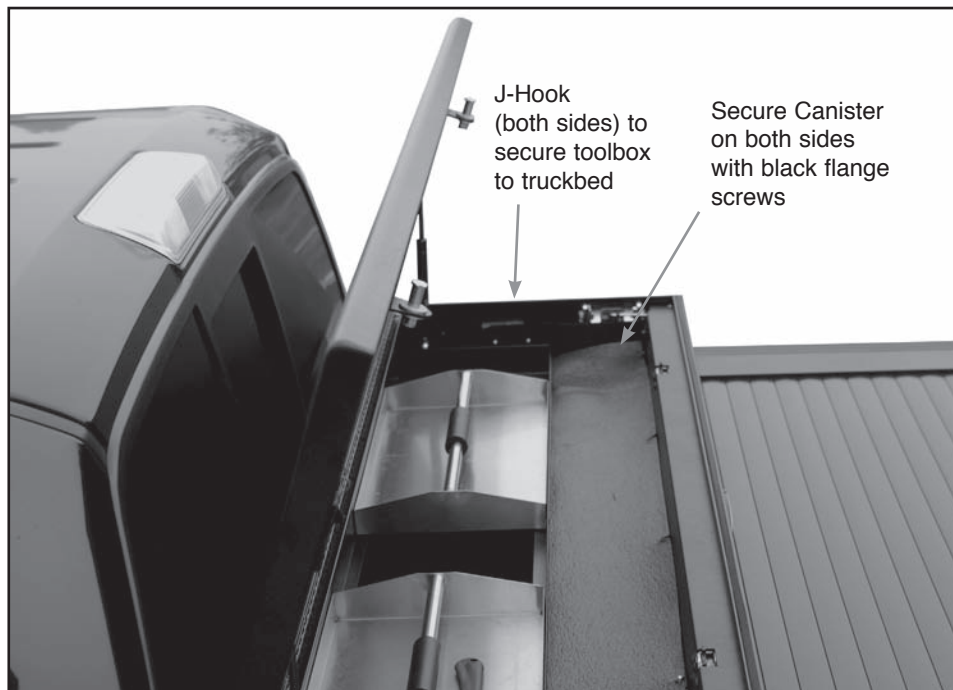

Stainless Steel trays are optional (extra charge), black trays are standard