


The below chart shows bushing stiffness for the proprietary blend material used in Truhart products vs OEM STi bushings vs standard OEM bushings.

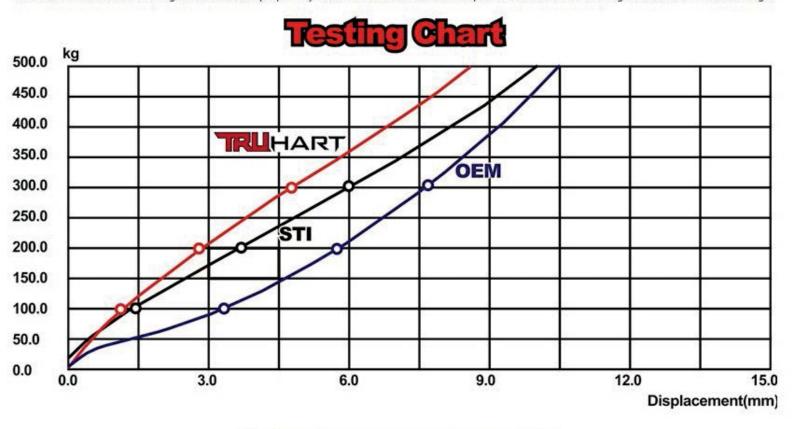

Weight Testing Range: 0 - 500Kg Testing Speed: 15mm/min 200Kg 300Kg 50Kg 100Kg No. **Test Date** K Value **Brand** Kgf/mm mm mm mm mm THART 2011/07/08 0.44 1.18 2.90 4.82 67.05 2011/07/08 0.49 1.46 6.02 3.67 52.22 STI 3 2011/07/08 1.36 **OEM** 3.32 5.69 7.61 24.25 **Average** 0.76 1.99 4.09 6.15 47.84