


BRAIDED FLEXIBLE RACE HOSES

Vibrant Performance offers a range of Braided Synthetic Rubber Hose manufactured to withstand the demands of the motorsports industry. These hoses are available in your choice of a 300 series Stainless Steel Braided Cover for ultimate protection from abrasion and corrosion or a Black Braided Nylon Cover that is lightweight and durable.

Vibrant Performance Braided Flex Hoses are suitable for use with Oil, Water, Fuel, Coolant and Vacuum and are capable of handling operating temperatures ranging from -40 deg F to 300 deg. F and elevated Operating Pressures.



STAINLESS STEEL BRAIDED FLEX HOSES

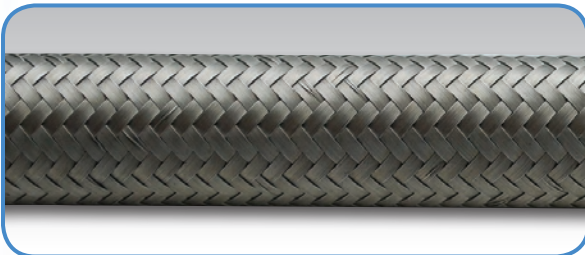

TECH TIP

Vibrant Performance Heat Protect Flexible Sleeving protects your Race Hoses from constant temperatures up to 500° deg F.

These sleeves are easy to install, will not melt, delaminate or become brittle under normal operating conditions and provides a professional solution to your thermal protection needs.



AN Size	Hose ID	Hose OD	2ft Roll Part No.	5ft Roll Part No.	10ft Roll Part No.	20ft Roll Part No.	Operating Pressure
-4	0.22" (5.55mm)	0.44" (11.20mm)	11904	11934	11914	11924	1500 psi
-6	0.34" (8.70mm)	0.55" (13.80mm)	11906	11936	11916	11926	1500 psi
-8	0.44" (11.10mm)	0.625" (15.70mm)	11908	11938	11918	11928	1250 psi
-10	0.56" (14.30mm)	0.83" (20.80mm)	11910	11940	11920	11930	1250 psi
-12	0.68" (17.45mm)	0.95" (23.90mm)	11912	11942	11922	11932	1000 psi
-16	0.89" (22.20mm)	1.20" (30.50mm)	11913	11943	11923	11933	750 psi
-20	1.125" (28.55mm)	1.40" (35.80mm)	11915	11945	11925	11935	500 psi

INNER SUPPORT SPRINGS

Our new Inner Support Spring offering provides your braided flex hoses with extra support to avoid collapse under extreme vacuum or if you are attempting very tight bends.



Part No.	Description	Spring Length
17306	Support Spring for -6AN Flex Hose	4 feet
17308	Support Spring for -8AN Flex Hose	4 feet
17310	Support Spring for -10AN Flex Hose	4 feet
17312	Support Spring for -12AN Flex Hose	4 feet
17316	Support Spring for -16AN Flex Hose	4 feet
17320	Support Spring for -20AN Flex Hose	4 feet


Note: Some lubrication may be needed for ease of installation



NYLON BRAIDED FLEX HOSES

Vibrant Performance Nylon Braided Flex Hoses are now available in your choice of All-Black, Black/Blue or Black/Red Braid.

Available in 2 foot, 5 foot, 10 foot and 20 foot lengths.

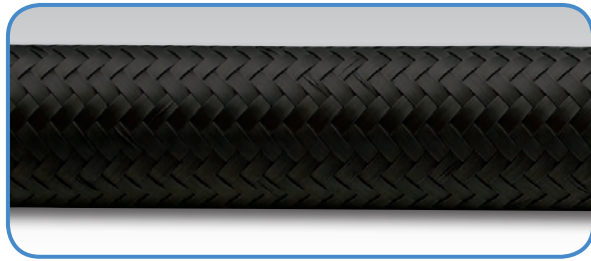

All Black Nylon Braided Flex Hose



Black/Blue Nylon Braided Flex Hose



Black/Red Nylon Braided Flex Hose

ALL BLACK NYLON BRAIDED FLEX HOSES

AN Size	Hose ID	Hose OD	2ft Roll Part No.	5ft Roll Part No.	10ft Roll Part No.	20ft Roll Part No.	Operating Pressure
-4	0.22" (5.55mm)	0.44" (11.20mm)	11954	11984	11964	11974	500 psi
-6	0.34" (8.70mm)	0.55" (13.80mm)	11956	11986	11966	11976	500 psi
-8	0.44" (11.10mm)	0.625" (15.70mm)	11958	11988	11968	11978	500 psi
-10	0.56" (14.30mm)	0.83" (20.80mm)	11960	11990	11970	11980	500 psi
-12	0.68" (17.45mm)	0.95" (23.90mm)	11962	11992	11972	11982	350 psi
-16	0.89" (22.20mm)	1.20" (30.50mm)	11963	11993	11973	11983	350 psi

BLACK / BLUE NYLON BRAIDED FLEX HOSES

AN Size	Hose ID	Hose OD	2ft Roll Part No.	5ft Roll Part No.	10ft Roll Part No.	20ft Roll Part No.	Operating Pressure
-4	0.22" (5.55mm)	0.44" (11.20mm)	11954B	11984B	11964B	11974B	500 psi
-6	0.34" (8.70mm)	0.55" (13.80mm)	11956B	11986B	11966B	11976B	500 psi
-8	0.44" (11.10mm)	0.625" (15.70mm)	11958B	11988B	11968B	11978B	500 psi
-10	0.56" (14.30mm)	0.83" (20.80mm)	11960B	11990B	11970B	11980B	500 psi
-12	0.68" (17.45mm)	0.95" (23.90mm)	11962B	11992B	11972B	11982B	350 psi
-16	0.89" (22.20mm)	1.20" (30.50mm)	11963B	11993B	11973B	11983B	350 psi

BLACK / RED NYLON BRAIDED FLEX HOSES

AN Size	Hose ID	Hose OD	2ft Roll Part No.	5ft Roll Part No.	10ft Roll Part No.	20ft Roll Part No.	Operating Pressure
-4	0.22" (5.55mm)	0.44" (11.20mm)	11954R	11984R	11964R	11974R	500 psi
-6	0.34" (8.70mm)	0.55" (13.80mm)	11956R	11986R	11966R	11976R	500 psi
-8	0.44" (11.10mm)	0.625" (15.70mm)	11958R	11988R	11968R	11978R	500 psi
-10	0.56" (14.30mm)	0.83" (20.80mm)	11960R	11990R	11970R	11980R	500 psi
-12	0.68" (17.45mm)	0.95" (23.90mm)	11962R	11992R	11972R	11982R	350 psi
-16	0.89" (22.20mm)	1.20" (30.50mm)	11963R	11993R	11973R	11983R	350 psi