


STAINLESS STEEL FLEXIBLE COUPLINGS

Vibrant Power Inc. is a world leader in the design and production of Stainless Steel Flexible Couplings. Vibrant Flexible Couplings are engineered to isolate vibration generated by the engine, thereby relieving stress on your vehicle's exhaust system. They will reduce premature cracking of manifolds and downpipes and help extend the life of other components.




STAINLESS STEEL BELLOWS ASSEMBLIES (WITH SOLID LINER)

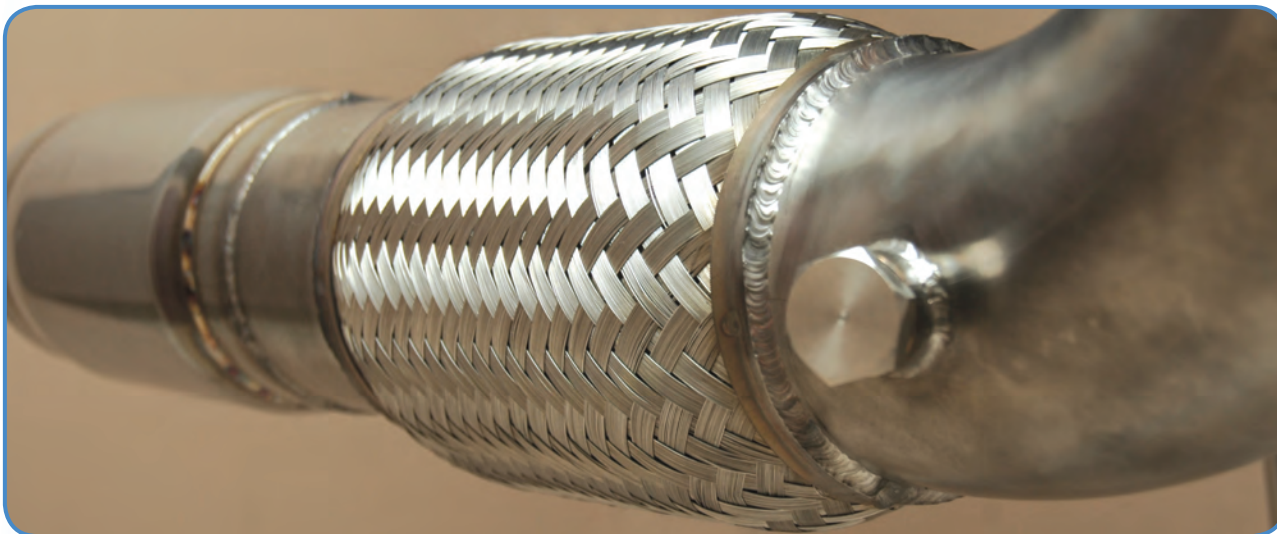


- Features a directional, smooth flow solid liner.
- Full T304 Stainless Steel construction, including Weld Necks.

Part No.	Inlet / Outlet I.D.	Flex Length
67327	1 1/2" (38.1mm)	2 3/4" (63.5mm)
67425	1 3/4" (44.9mm)	2 1/2" (63.5mm)
67527	1 7/8" (47.6mm)	2 3/4" (63.5mm)
67632	2" (50.8mm)	3 1/4" (82.5mm)

TURBO FLEX WITH INTERLOCK LINER

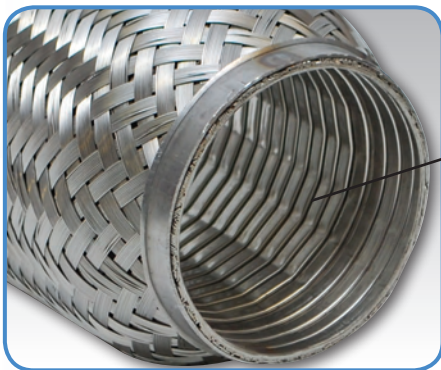


Vibrant's Turbo Flex Coupling features an internal Stainless Steel Interlock Liner to facilitate smooth flow of high temperature exhaust gases. Recommended for all high flowing, high temperature applications (e.g. forced induction).

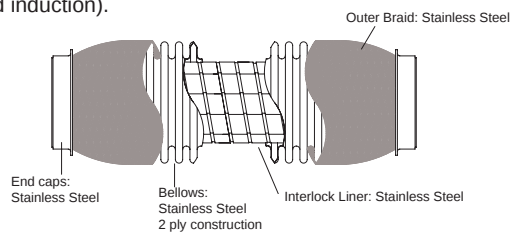

Part No.	Inlet/Outlet I.D.	Flex Length
60404	1 3/4" (44.9mm)	4" (102mm)
60604	2" (51.3mm)	4" (102mm)
60704	2 1/4" (57.1mm)	4" (102mm)
60804	2 1/2" (63.5mm)	4" (102mm)
60806	2 1/2" (63.5mm)	6" (152mm)
60808	2 1/2" (63.5mm)	8" (203mm)
60810	2 1/2" (63.5mm)	10" (254mm)
61004	3" (76.2mm)	4" (102mm)
61006	3" (76.2mm)	6" (152mm)

Part No.	Inlet/Outlet I.D.	Flex Length
61008	3" (76.2mm)	8" (203mm)
61010	3" (76.2mm)	10" (254mm)
61108	3 1/2" (89mm)	8" (203mm)
61110	3 1/2" (89mm)	10" (254mm)
61208	4" (101.6mm)	8" (203mm)
61210	4" (101.6mm)	10" (254mm)
61408	5" (127mm)	8" (203mm)
61410	5" (127mm)	10" (254mm)


STANDARD FLEX COUPLINGS WITH INNER BRAID LINER

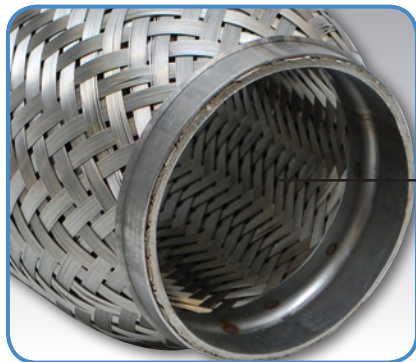

TECH TIP

Best Suited for Naturally Aspirated applications. Not recommended for Forced Induction Applications.

Vibrant Flex Couplings with Inner Braid Liner provide laminar flow while retaining flexibility in the coupling itself. The Inner Braid protects the Bellows from premature failure, and is ideal for eliminating exhaust "whistle".

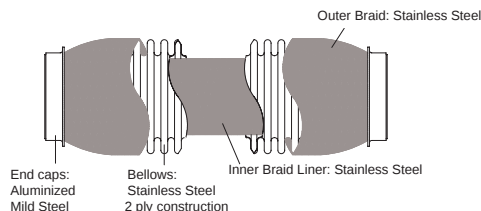


Part No.	Inlet/Outlet I.D.	Flex Length
62304	1 1/2" (38.6mm)	4" (102mm)
62306	1 1/2" (38.6mm)	6" (152mm)
62308	1 1/2" (38.6mm)	8" (203mm)
62404	1 3/4" (44.9mm)	4" (102mm)
62406	1 3/4" (44.9mm)	6" (152mm)
62408	1 3/4" (44.9mm)	8" (203mm)
62410	1 3/4" (44.9mm)	10 1/4" (260mm)
62604	2" (51.3mm)	4" (102mm)
62606	2" (51.3mm)	6" (152mm)
62608	2" (51.3mm)	8" (203mm)
62610	2" (51.3mm)	10" (254mm)

Part No.	Inlet/Outlet I.D.	Flex Length
62704	2 1/4" (57.1mm)	4" (102mm)
62706	2 1/4" (57.1mm)	6" (152mm)
62708	2 1/4" (57.1mm)	8" (203mm)
62804	2 1/2" (63.5mm)	4" (102mm)
62806	2 1/2" (63.5mm)	6" (152mm)
62808	2 1/2" (63.5mm)	8" (203mm)
62810	2 1/2" (63.5mm)	10" (254mm)
63004	3" (76.2mm)	4" (102mm)
63006	3" (76.2mm)	6" (152mm)
63008	3" (76.2mm)	8" (203mm)

STANDARD FLEX COUPLINGS (WITHOUT INNER LINER)



Our Standard Flex Couplings (without Inner Liner) offer a cost effective solution for isolating vibration and protecting a vehicle's exhaust components from damage.

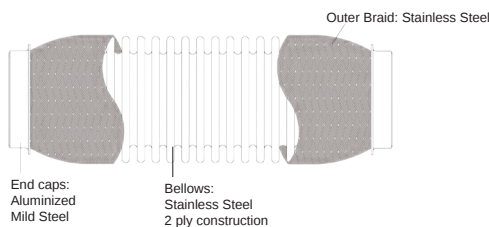

Part No.	Inlet/Outlet I.D.	Flex Length
64304	1 1/2" (38.6mm)	4" (102mm)
64404	1 3/4" (44.9mm)	4" (102mm)
64406	1 3/4" (44.9mm)	6" (152mm)
64408	1 3/4" (44.9mm)	8" (203mm)
64410	1 3/4" (44.9mm)	10" (254mm)
64604	2" (51.3mm)	4" (102mm)
64606	2" (51.3mm)	6" (152mm)
64608	2" (51.3mm)	8" (203mm)
64610	2" (51.3mm)	10" (254mm)

Part No.	Inlet/Outlet I.D.	Flex Length
64704	2 1/4" (57.1mm)	4" (102mm)
64708	2 1/4" (57.1mm)	8" (203mm)
64710	2 1/4" (57.1mm)	10" (254mm)
64806	2 1/2" (63.5mm)	6" (152mm)
64808	2 1/2" (63.5mm)	8" (203mm)
64810	2 1/2" (63.5mm)	10" (254mm)
65006	3" (76.2mm)	6" (152mm)
65008	3" (76.2mm)	8" (203mm)
65010	3" (76.2mm)	10" (254mm)