

ALUMINUM VACUUM MANIFOLD

Vibrant's popular Aluminum Vacuum Manifold allows for consistent vacuum from a single source to be distributed through up to 6 ports to support all your accessories.

We include all necessary mounting hardware for simplified installation.

All ports come with plugs pre-installed.

We recommend using Vibrant Pneumatic Fittings with this Vacuum Manifold

Manifold Dimensions:

5 1/2" long x 1 1/2" wide 1" tall


Port Details:

6 ports threaded for 1/8" NPT fittings
Center port threaded for 3/8" NPT fittings



Part No.	Description
----------	-------------

ALUMINUM VACUUM



Part No. 12890

VIBRANT



ALUMINUM VACUUM LINE FITTINGS - HARD MOUNT

Vibrant Performance makes it easy to add vacuum line fittings to your tubing.

Simply select the proper fitting for your application, drill an appropriately sized hole into your tubing and pop in the grommet and fitting. Requires no welding.

Use with Vibrant Performance Vacuum Hose.



Part No.	Description
2895	10mm O.D. Fitting with rubber grommet
2896	16mm O.D. Fitting with rubber grommet
2897	19mm O.D. Fitting with rubber grommet

PNEUMATIC (ONE - TOUCH) VACUUM FITTINGS

Vibrant Performance "One Touch" fittings allow for simple and secure tubing connections. These fittings are suitable for both ambient and pressurized air, up to 150 psi and are virtually impossible to pull apart when inserted properly in the fitting. Your vacuum tubing quickly disconnects from the fitting by simply pushing down on the release collar. No need for hose clamps or zip ties to secure lines! All threads are PTFE coated.



MALE STRAIGHT

Part No.	Tube Size (OD)	Thread
2660	5/32" (4mm)	1/8" NPT
2662	1/4" (6mm)	1/8" NPT
2664	1/4" (6mm)	1/4" NPT
2661	3/8" (9.5mm)	1/8" NPT
2663	3/8" (9.5mm)	1/4" NPT



MALE 90 DEG ELBOW

Part No.	Tube Size (OD)	Thread
2665	5/32" (4mm)	1/8" NPT
2667	1/4" (6mm)	1/8" NPT
2669	1/4" (6mm)	1/4" NPT
2655	1/4" (6mm)	3/8" NPT
2653	1/4" (6mm)	1/2" NPT
2666	3/8" (9.5mm)	1/8" NPT
2668	3/8" (9.5mm)	1/4" NPT



UNION Y

Part No.	Tube Size (OD)
2680	5/32" (4mm)
2682	1/4" (6mm)
2681	3/8" (9.5mm)



UNION STRAIGHT

Part No.	Tube Size (OD)
2670	5/32" (4mm)
2672	1/4" (6mm)
2671	3/8" (9.5mm)



UNION T

Part No.	Tube Size (OD)
2675	5/32" (4mm)
2677	1/4" (6mm)
2676	3/8" (9.5mm)



UNION STRAIGHT

Part No.	Tube Size (OD)
16200	1/4" (6mm)

Nickel Plated Brass Construction



UNION T

Part No.	Tube Size (OD)
16203	1/4" (6mm)

Nickel Plated Brass Construction




FIREWALL FITTING

Part No.	Tube Size (OD)
16204	1/4" (6mm)

Nickel Plated Brass Construction

POLYETHYLENE TUBING

Perfect for air lines and instrumentation. Withstands up to 100 PSI and temperatures up to 140 deg. F.

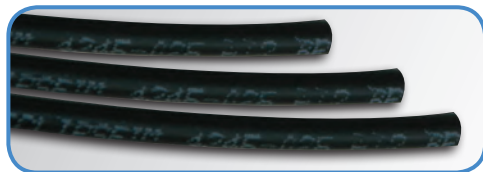

Part No.	O.D. Tube Size	Quantity	Color
2650	5/32" (4mm)	10 ft.	Black
2652	1/4" (6mm)	10 ft.	Black
2651	3/8" (9.5mm)	10 ft.	Black

HIGH TEMP VACUUM LINE KITS

High temperature Vacuum Line Kits are ideal for use on forced induction and naturally aspirated applications

- All-metal Nickel-plated Pneumatic Brass Fittings
- PTFE hose designed to withstand extreme temperatures
- PTFE specs: -292°F to 500°F @ 100psi, withstands cryogenic to 700°F+

Part No.	Description
17400	All Purpose Kit (includes 10ft of 1/4" O.D. Polyurethane Hose, 10ft of 1/4" O.D. High Temp PTFE Hose and Pneumatic Fittings)
17402	High Temperature Vacuum Line Kit (includes 10ft of 1/4" O.D. White High Temp PTFE Hose and High Temp Pneumatic Fittings)
17431W	5 foot length of 1/4" O.D. High Temp PTFE Hose - White
17430W	10 foot length of 1/4" O.D. High Temp PTFE Hose - White



Part No. 17400