


***SPECIFICATION**

1. OPERATING VOLTAGE (12V) : DC11.0V ~ 16.0V
(24V) : DC18.0V ~ 32.0V
2. LED : 3W(750mA)
3. REFLECTOR : PC / VACUUM METALLIZED
4. LENS : ACRYLIC
5. VIBRATION : 8.6G_{RMS}
6. WEATHER PROOF & DUST RESISTANCE
7. TEMPERATURE : -40°C ~ 105°C
8. LIFE : 500,000Hrs
9. IP RATING : IP67
10. TENSILE STRENGTH: THE WIRES CAN WITHSTAND ABOUT 15Kg PULL FOR 3SEC.

HOUSING : MG610320 KET
TERMINAL : ST730496-3 KET
WIRE SEAL : MG680451 KET
REAR HOLDER : MG630496-3 KET

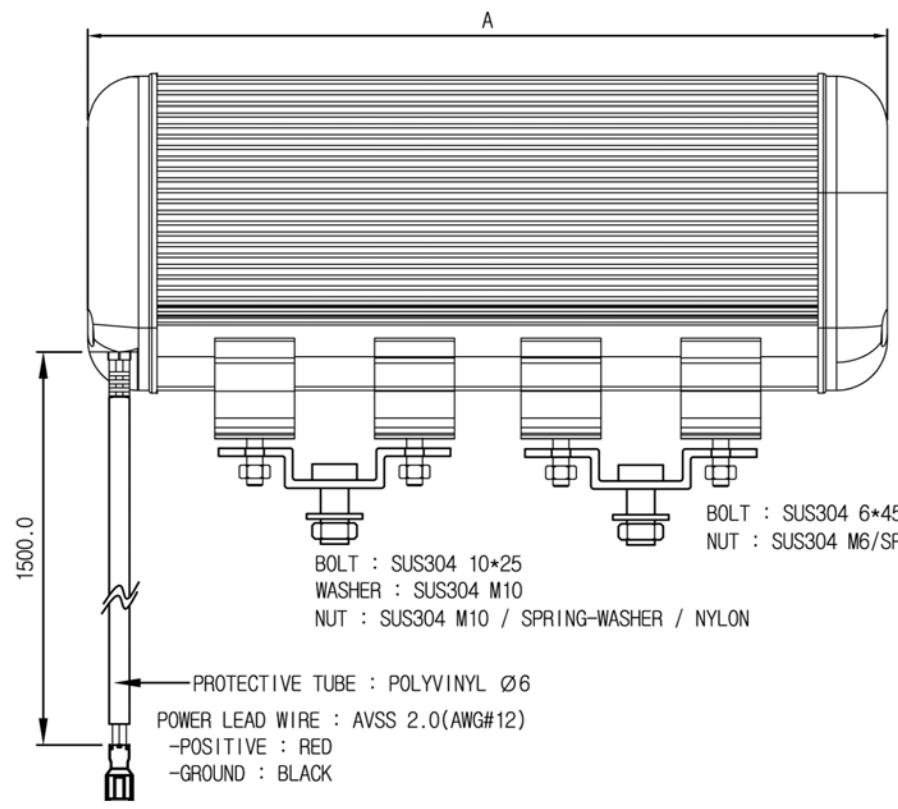

LED QUANTITY	WATT(W)	A (inch/mm)	B (inch/mm)	C (inch/mm)	D (inch/mm)	BRACKET #1/#2 (PCS)	WEGHT (Kg)
16 LED	48	5.8(147.6)	4.7 (120.0)	3.0(76.25)	*	2 / 1	1.45
24 LED	72	7.8(198.4)			*		1.90
40 LED	120	11.8(300.0)	4.7 (120.0)	3.0(76.25)	4.92(125)	8 / 4	2.20
80 LED	240	21.7(550.0)			5.0(127.8)		5.05
120 LED	360	31.8(808.0)			8.35(212)		7.65

