



Protecting Your Adventure Lifestyle

---


## 800002 REAR COIL SPRING KIT –JEEP TJ 4” LIFT INSTALLATION INSTRUCTIONS

**Please read instructions before beginning installation.** Check the kit hardware against the parts list. Be sure you have all needed parts and know where they go.

---

1. Raise and support the vehicle with jack stands.
2. Remove the tires and wheels.
3. Disconnect and remove the existing lower control arms
4. Disconnect the lower track bar mount as shown in the illustration.
5. Locate and remove the rear stabilizer bar and rear shock absorbers.
6. Lower the rear axle until the coil springs are free from the upper seat and remove the coil springs.
7. To install new coil springs, reverse steps #1 through #5.
8. Torque lower control arms to 130 ft/lbs. Torque track bar to 37 ft/lbs.

ILLUSTRATION

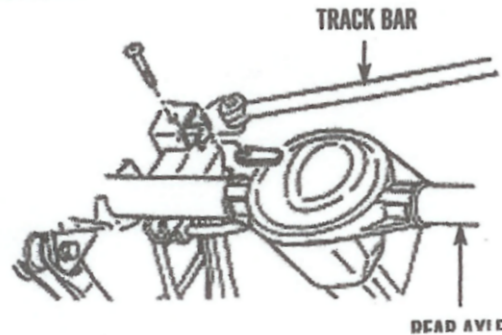

### **MAINTENANCE INFORMATION**

It is the ultimate buyers responsibility to have all bolts/nuts checked for tightness after the first 100 miles. After that, check them every 1000 miles. Wheel alignment steering system, suspension and drive line systems must be inspected by a qualified professional mechanic at least every 3000 miles.

### **PARTS LIST**

<b>REAR COIL SPRINGS</b>
--------------------------

700016 (2)
------------

**QUALITY • INTEGRITY • INNOVATION • SERVICE**

Learn more about suspension parts on our website.