


# Weigh Safe!

MEASURES TONGUE WEIGHT




## INSTRUCTIONS:

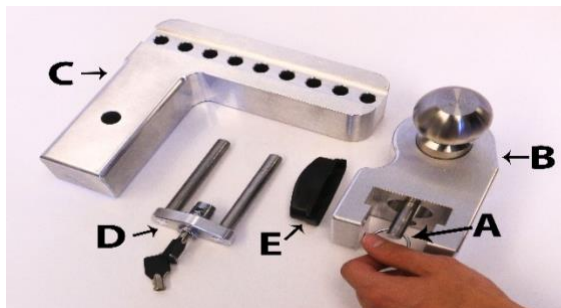

**STEP 1:** Ensure that the Weigh Safe Hitch Ball Pin (A) is inserted fully into the Weigh Safe Slider (B). **Do not operate without Weigh Safe Hitch Ball Pin in place.**

**STEP 2:** Place the Weigh Safe Slider (B) at the desired drop on the Drawbar (C) to ensure that your vehicle and trailer are properly positioned.

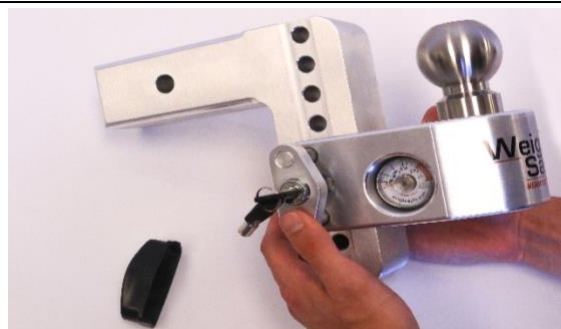

**STEP 3:** Once you have achieved the desired position along the Drawbar, insert the Key Lock Assembly (D) into the Weigh Safe Slider and lock in place by turning the key.



**STEP 4:** **Pull** on the Key Lock Assembly to ensure that it has engaged and place the Dust Lock Cover (E) over the lock. **Do not operate without making sure the Key Lock Assembly is securely locked in place.**

## \*\*\*IMPORTANT SAFETY INFORMATION\*\*\*

Ensure safety chains are attached between vehicle and trailer. DO NOT attach chains directly to hitch. Never exceed the LOWER rating between: A) Tow vehicle manufacturer's load OR B) Weigh Safe Hitch GTW hitch ratings: 7,500 lbs. (1-7/8" ball), 8,000 lbs. (2" ball), 12,500 lbs. (2-5/16" ball & 2" shank), 18,500 lbs. (2-5/16" ball & 2.5" shank), 21,000 lbs. (2-5/16" ball and 3" shank). Tongue Weight should be between 10-15 % of gross trailer weight. Weigh Safe Hitch max tongue weight is 1,500 lbs. (2" shank) and 2,200 lbs. (2.5" & 3" shanks). Secure your Weigh Safe Hitch to a standard 2", 2.5" or 3" receiver with locking pin.