



AUTOMOTIVE PRODUCTS, INC.

INSTRUCTIONS


APPLICATION: 2011 - 2012 FORD F150 ECOBOOST LICENSE PLATE RELOCATOR
APP PART # 32-0065

ITEM	QUANTITY	DESCRIPTION	TOOLS NEEDED
1	1	LICENSE PLATE RELOCATOR	PHILIPS HEAD SCREW DRIVER
2	2	M5 PHILLIPS TRUSS HEAD SCREWS	8MM WRENCH
3	2	M5 FLANGE NUTS	

1. Remove contents from box, verify if all parts listed are present and free from damage. Carefully read and understand all instructions before attempting installation.
2. Remove factory license plate frame and keep factory mounting hardware.
3. To attach the license plate relocater to the vehicle slip it into the factory plastic tabs and attach using the factory hardware.
4. Attach the license plate frame to the relocater using the (2) M5 Phillips truss head screws, and (2) M5 flange nuts.

CARE INSTRUCTIONS

- REGULAR WAXING IS RECOMMENDED. DO NOT USE ANY TYPE OF POLISH OR WAX THAT MAY CONTAIN ABRASIVES
- STAINLESS STEEL PRODUCTS CAN BE CLEANED WITH MILD SOAP AND WATER. STAINLESS STEEL POLISH SHOULD BE USED TO POLISH SMALL SCRATCHES.
- GLOSS BLACK FINISHES SHOULD BE CLEANED WITH MILD SOAP AND WATER

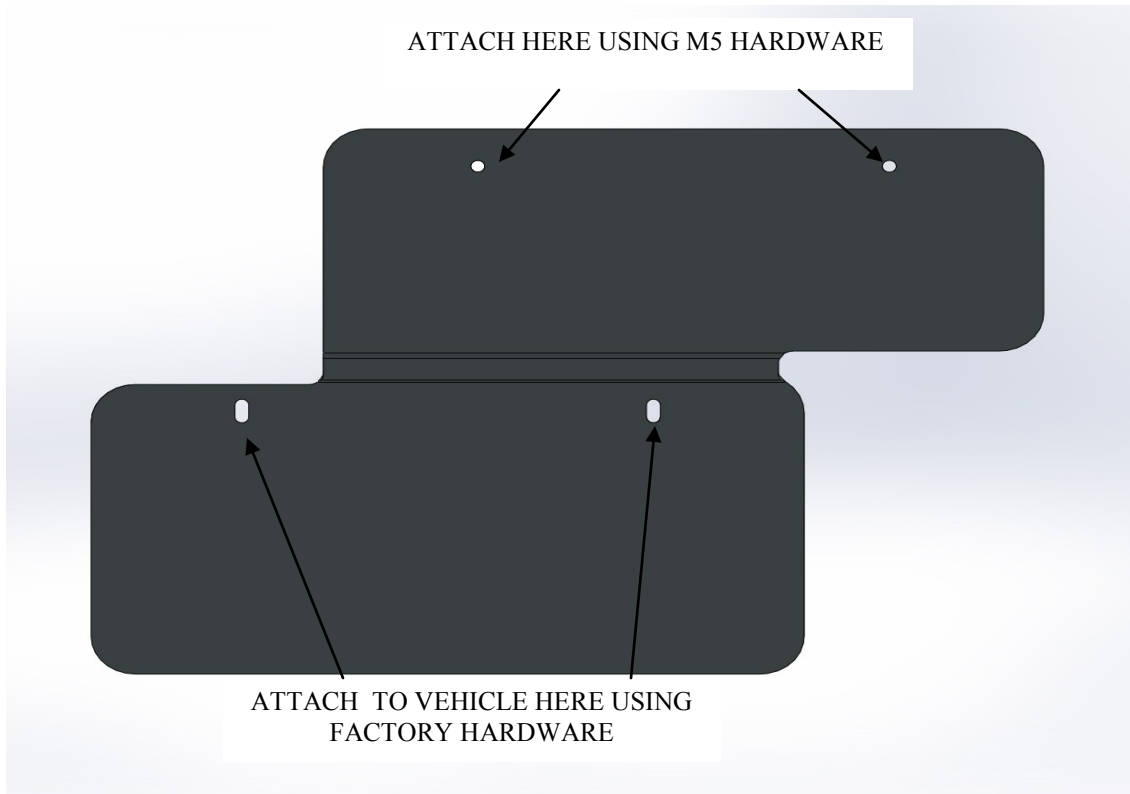

INSTALLATION COMPLETE



Check out the collection of grille guards and bull bars we offer.