

# LED AUXILIARY LIGHTS



## HP LED AUXILIARY LIGHTS / POWER OUTPUT: 27 WATTS

- Dimensions: Round (4.7") and Square (4.6")
- 3W Osram LED chips
- Dust and moisture resistant lens
- Raw Lumens: 2,025
- Die-cast aluminum housing
- Pivoting base mount brackets
- Includes mounting hardware and pigtail connector
- Limited lifetime warranty
- Available in Flood or Spot beam




## AXIS PAIR PACKS – SET OF 2

- Set of (2) Axis LED auxiliary lights
- Wiring harness with connector, switch, relay and in-line fuse



**PAIR PACK  
AVAILABLE**

PART NO. SINGLE	PART NO. PAIR PACK	POWER OUTPUT	BEAM TYPE	LEDS	FACE SIZE	AMP DRAW 12V	RAW LUMENS	BEAM DISTANCE	OPERATING VOLTAGE
09-12007A	09-12007A-PR	27	Spot	9 x 3W Osram	4.7"	1.8	2025	860	9V-30V
09-12007B	09-12007B-PR	27	Flood	9 x 3W Osram	4.7"	1.8	2025	365	9V-30V
09-12219A	09-12219A-PR	27	Spot	9 x 3W Osram	4.6"	1.8	2025	935	9V-30V
09-12219B	09-12219B-PR	27	Flood	9 x 3W Osram	4.6"	1.8	2025	410	9V-30V

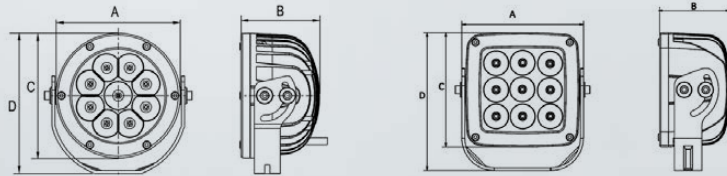

MODEL	A	B	C	D	MODEL	A	B	C	D
09-12007	4.7 in.	3.0 in.	4.7 in.	5.3 in.	09-12219	4.6 in.	2.9 in.	4.6 in.	5.5 in.



PIGTAIL CONNECTOR