


# LED LIGHT BARS



## HP LOW PROFILE DOUBLE ROW / POWER OUTPUT: 12 – 300 WATTS

- Face sizes available in 2", 4", 6", 10", 20", 30", 40" and 50" lengths
- 3W Osram LED chips
- 6063 extruded aluminum housing with die-cast ends
- Dust and moisture resistant lens
- GORE® pressure equalizing vent
- Raw Lumens: 1,500 – 23,000
- Includes wiring harness with connector, switch, relay and in-line fuse and mounting hardware
- Limited lifetime warranty
- Available in Flood or Flex beam

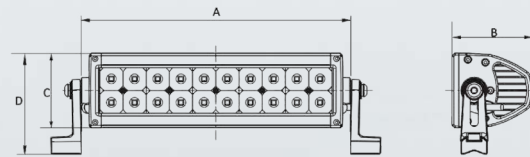

Performance2X LED Light Bar - Flex Beam



MODEL	A	B	C	D
09-12230-4	3.6 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-8	5.6 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-12	7.6 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-20	11.7 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-40	21.7 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-60	31.7 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-80	41.8 in.	3.5 in.	3.2 in.	4.4 in.
09-12230-100	51.8 in.	3.5 in.	3.2 in.	4.4 in.

PART NO.	POWER OUTPUT	BEAM TYPE	LEDS	FACE SIZE	AMP DRAW 12V	RAW LUMENS	BEAM DISTANCE	OPERATING VOLTAGE
09-12230-4F	12	Flood	4 x 3W Osram	2"	0.9	1500	820	9V-30V
09-12230-4S	12	Flex	4 x 3W Osram	2"	0.9	1500	2250	9V-30V
09-12230-8F	24	Flood	8 x 3W Osram	4"	1.6	3000	950	9V-30V
09-12230-8S	24	Flex	8 x 3W Osram	4"	1.6	3000	2610	9V-30V
09-12230-12F	36	Flood	12 x 3W Osram	6"	2.0	4500	1058	9V-30V
09-12230-12S	36	Flex	12 x 3W Osram	6"	2.0	4500	2850	9V-30V
09-12230-20F	60	Flood	20 x 3W Osram	10"	3.4	5700	1425	9V-30V
09-12230-20S	60	Flex	20 x 3W Osram	10"	3.4	5700	3775	9V-30V
09-12230-40F	120	Flood	40 x 3W Osram	20"	6.8	9200	1880	9V-30V
09-12230-40S	120	Flex	40 x 3W Osram	20"	6.8	9200	4950	9V-30V
09-12230-60F	180	Flood	60 x 3W Osram	30"	10.2	13800	2470	9V-30V
09-12230-60S	180	Flex	60 x 3W Osram	30"	10.2	13800	6425	9V-30V
09-12230-80F	240	Flood	80 x 3W Osram	40"	14.9	18400	2880	9V-30V
09-12230-80S	240	Flex	80 x 3W Osram	40"	14.9	18400	7345	9V-30V
09-12230-100F	300	Flood	100 x 3W Osram	50"	18.3	23000	3165	9V-30V
09-12230-100S	300	Flex	100 x 3W Osram	50"	18.3	23000	7920	9V-30V



(2) 10" PERFORMANCE2X  
PART NO. 09-12230-20S  
Shown on HDX Front Bumper  
Part No. 58-141515

## PERFORMANCE 2X

### HP LOW PROFILE DOUBLE ROW LED LIGHT BARS

Westin's Performance2X LED Light Bars face sizes are available in 2", 4", 6", 10", 20", 30", 40" and 50" lengths. They feature a high quality powder coat finish with a rubber sealed GORE® pressure-equalizing vent. All LED light bars are protected by polycarbonate lens that is shock proof, shatter and scratch resistant. They all include a wiring harness with connector, switch, relay and in-line fuse and mounting hardware.