

2.50



990701258


**PLEASE READ THE FOLLOWING
NOTICE BEFORE INSTALLATION.**

Removal:

1. Disconnect the negative battery cable.
2. Fully open door.
3. Using a small screwdriver, carefully pry between the pillar and the outer circumference of the door switch housing to release the locking tabs from the mounting hole in the pillar.
4. Pull the door switch out from the mounting hole far enough to access and disconnect the wire harness connector from the switch.

Installation:

1. Reconnect wire connector to switch.
2. Using only hand pressure, press the switch housing into the mounting hole until locking tabs snap into place.
3. Slowly close the door and allow the switch plunger self-adjuster mechanism to ratchet to the proper position.
4. Reconnect negative battery cable.
5. Open and close door to verify proper switch operation.

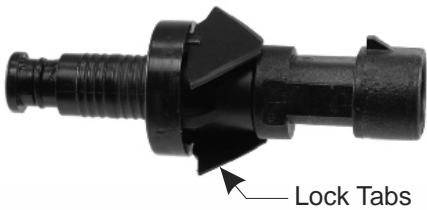

10.00