


B


A

FRONT

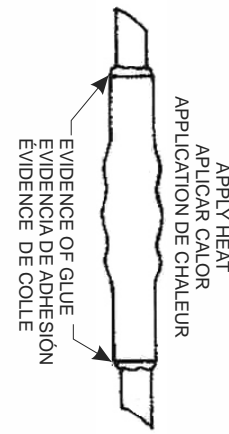


EVIDENCE OF GLUE
EVIDENCIA DE ADHESIÓN
ÉVIDENCE DE COLLE

APPLY HEAT
APLICAR CALOR
APPLICATION DE CHALEUR



CRIMP
ENGARCE/APRIETRE
SERTISSAGE



SEALED SPLICE
EMPALME SELLADO
ÉPISSURE ETANCHE

WIRE STOP
TOPE DE ALAMBRES
BUTÉE DE FIL

COLOR CODE

Green 26-22 Ga.
Salmon 20-18 Ga.
Blue 16-14 Ga.
Yellow 12-10 Ga.

PLEASE READ THE FOLLOWING INSTRUCTIONS BEFORE INSTALLATION.

Sealed Splice Instructions

- Determine proper sleeve for wire gauge.
- Position stripped ends of wire into sleeve until
- Wire fits snugly. Each side of the sleeve separately using a crimping tool. Gently tug on the wires to make sure they are securely crimped.
- Apply heat carefully to shrink the tubing. Recommend using a heat gun.
- Check for electrical continuity.


2.50

10.00

BACK

4 FOLDS 2.5 X 1.0

REV.	DESCRIPTION	ECN	DATE	BY
-	RELEASED	43914	8/22/2018	SAM
REVISION				

KEY CHARACTERISTIC		KPC / KC ∞ TOTAL 0 LAST NO. USED		SC 0 TOTAL 0 LAST NO. USED	
DATE	8/22/2018	SCALE	NTS	DRAWN BY	SAM
MATERIAL	20# WHITE SULFIDE PAPER		ENGINEER	TDS	
FINISH	BLACK PRINT DUPLEX		TITLE	INSTRUCTION SHEET	
UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES ANGLE ± 1° .XX ± .015 .XXX ± .005 G D & T A S M E Y 14.5-2009	 THIRD ANGLE		TYPE	SIZE	SHEET
			MODEL	B	1 OF 1
			PART NO.	990701255	
			REV	-	