

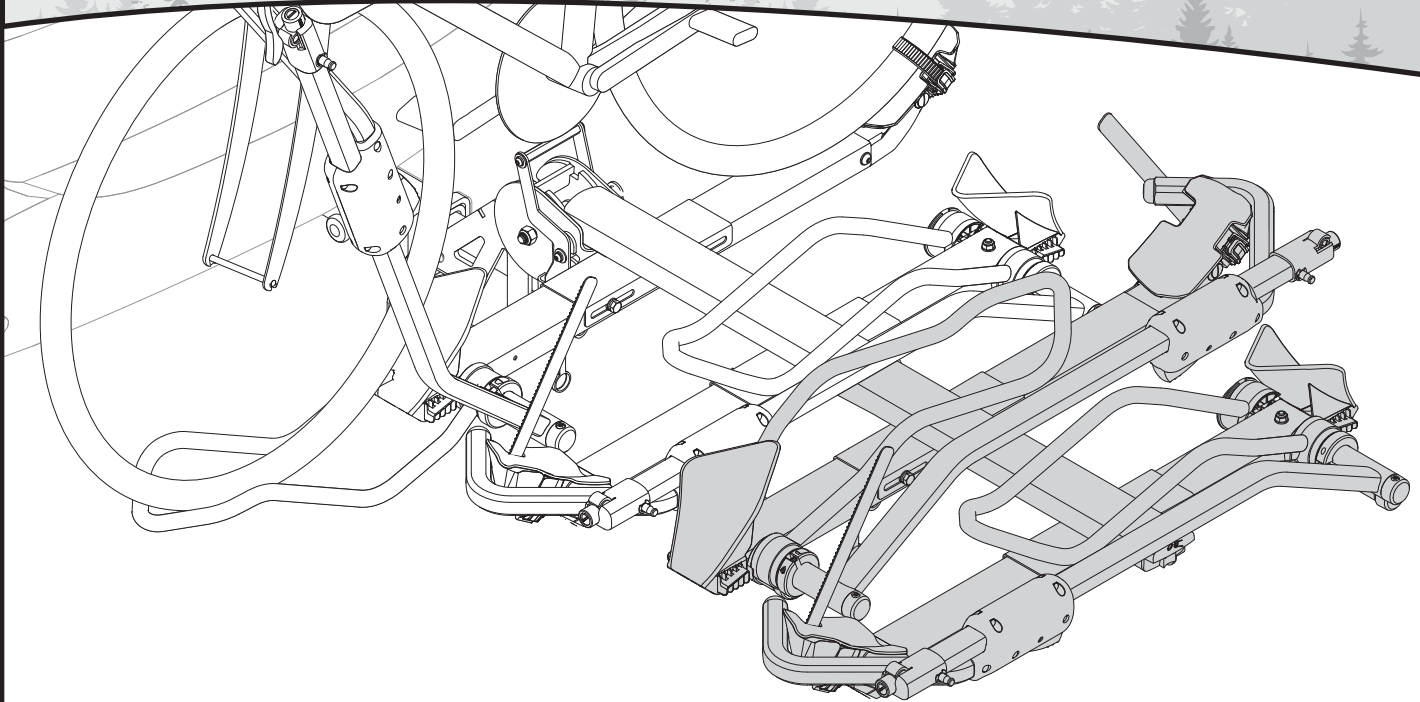





YAKIMA


HoldUp EVO +2




Contents

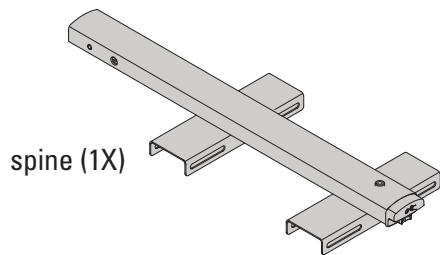

front tray assembly (1X)

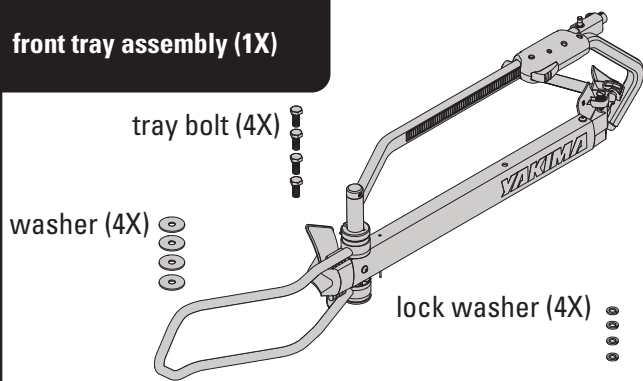

rear tray assembly (1X)

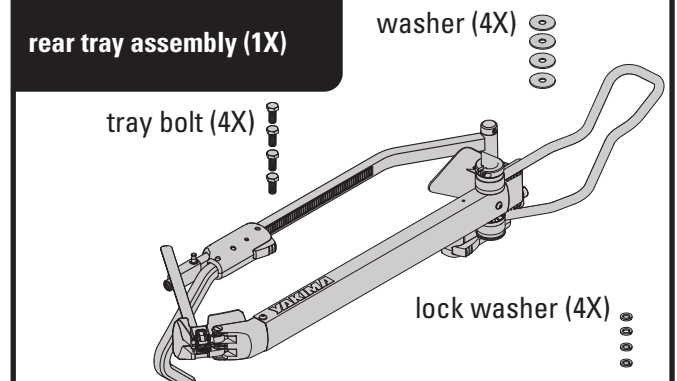

Tools required


flathead screwdriver



adjustable wrench




Weight limits

 Per Bike = 50lbs. / 22.7kg


INSTALLATION

1

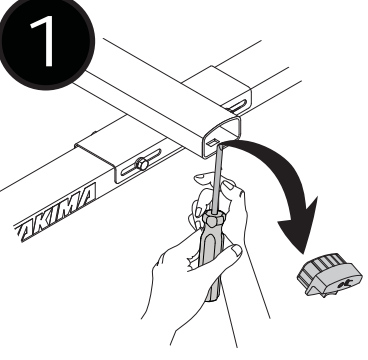


Using a flathead screwdriver remove the end cap from HoldUp EVO.

2

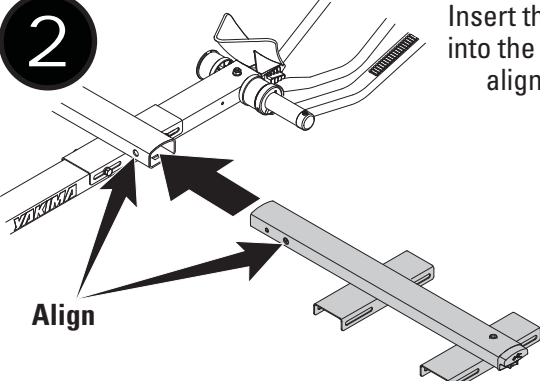


Insert the Plus2 base into the HoldUp tube, aligning holes.

3

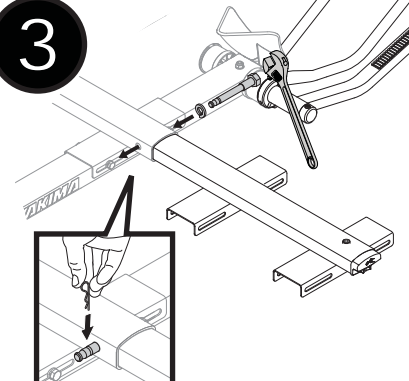


- Insert bolt and lock-washer in order shown.
- Tighten with adjustable wrench.
- Install safety pin.

4

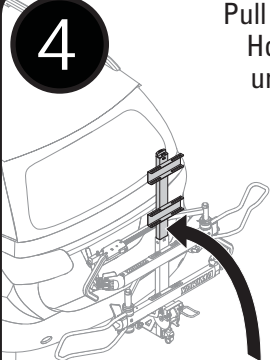

Pull the tilt lever and fold the HoldUp Evo all the way up until it locks into position.

5

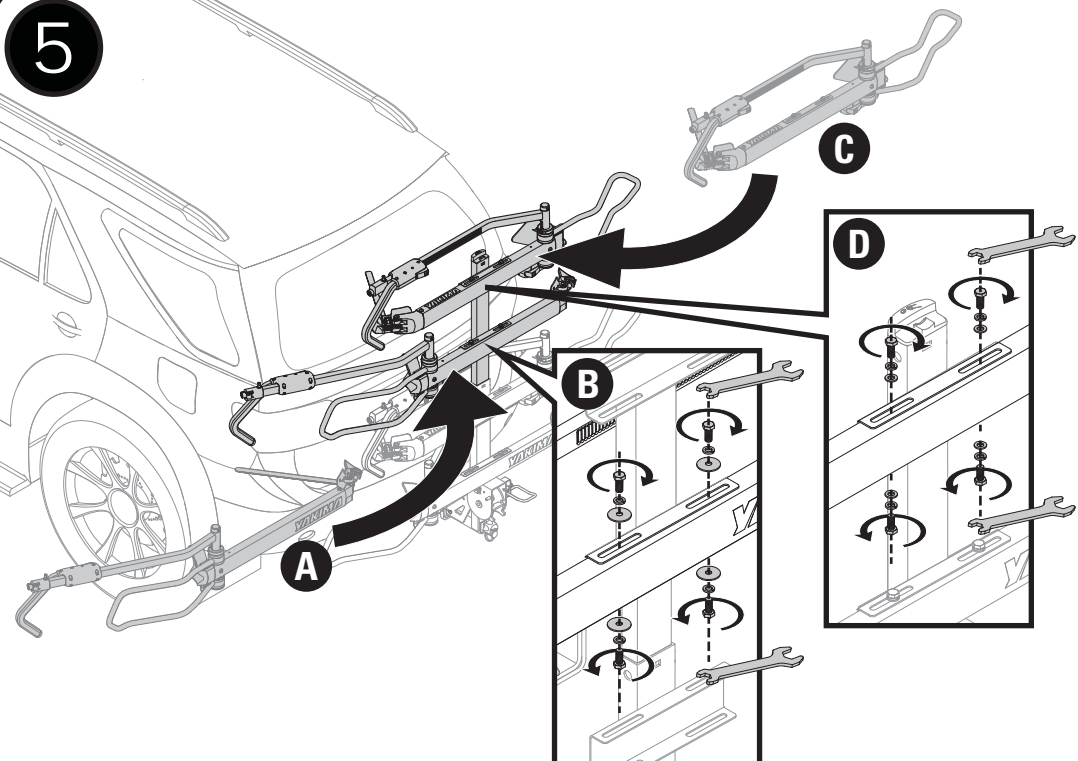


- A. Place the the lower tray assembly into position. Use the image as a guide to install the correct tray in the proper position.
- B. Install the hardware and fully tighten to 17 ft-lbs (23Nm).
- C. Place the upper tray assembly into position. Use the image as a guide to install the correct tray in the proper position.
- D. Install the hardware and fully tighten to 17 ft-lbs (23Nm).

LOADING

Refer to your HoldUp EVO user manual for loading (page 4-5) and locking instructions (page 6).



Always support the spine when lowering HoldUp EVO +2 when loaded with bikes.




IMPORTANT: For bikes with 20" wheels, if the wheelbase is less than 35", the rear wheel may not contact the wheel cup. Ensure that the wheel strap is pulled tightly, and secured in the buckle (see image). Also tires must be fully inflated, and centered on the tray.



CHECK THE INSTALLATION BEFORE DRIVING AWAY.

- Push hooks against tires.
- Check that rear wheels are secured by the ratchet straps.
- Be sure all hardware is secured according to instructions.
- Always secure pivot arm when tray is empty (see below).
- If required attach safety flag for longer load.

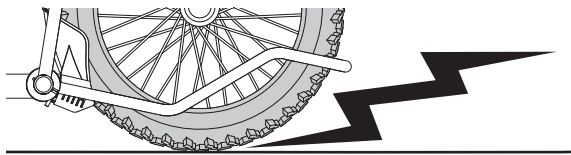


Keep in mind with certain bikes the lowest point may be the bike wheel.

UNLOADING


Refer to your HoldUp EVO user manual for unloading instructions (page 6).

SECURE pivot arms when not in use.

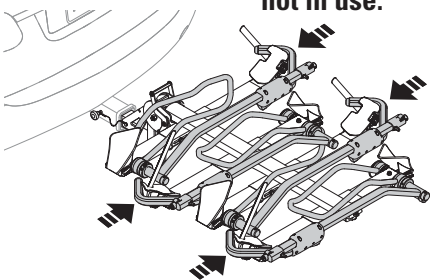


- Fold hoops inward.
- Tilt wheeltray inboard.
- Rotate pivot arm down.
- Push the hooks against wheeltrays.

When not carrying bikes always fold HoldUp EVO up. Pull the tilt lever and fold the HoldUp EVO all the way up until it locks into position.


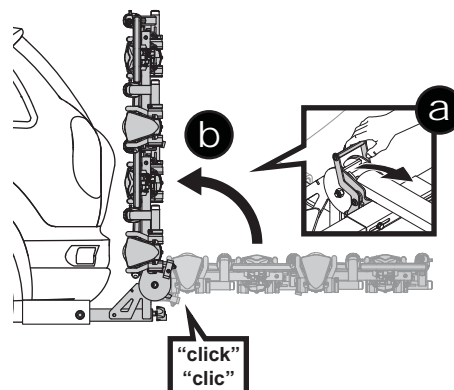



Careful:
Do not
overtighten!

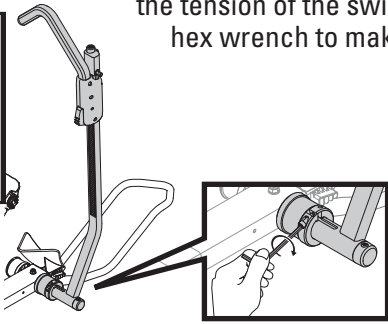


Periodically it may be necessary to adjust the tension of the swing arms. Use a 5 mm hex wrench to make the adjustment.

BOTTLE OPENER: Use the built in bottle opener to enjoy a refreshing beverage!




Do not carry
by the tilt
levers.



IMPORTANT LOAD LIMITS:



HOLDUP EVO +2 IS LIMITED TO 50 LBS. PER BIKE. TOTAL ALLOWABLE LOAD FOR 4 BIKES IS 160 LBS.

Do not install on trailers, campers, or RVs.

Do not install if spare tire causes interference with bikes, or folded carrier.

Not for use on bikes with front fenders.

Never drive off-road with bicycles loaded.

Do not position bicycle tires near vehicle's hot exhaust.

Do not use an automated car wash with carrier installed.

BIKES:

- Make sure your tires are filled to recommended pressure found on the tire.
- Do not carry tandem or recumbent bikes.
- Do not transport bicycles with attached baby seats, panniers, wheel covers, full bike covers or motors.



In addition, some undersized receivers may not accept this product. If you do not know the capabilities of your hitch receiver, consult an automotive professional.