



YAKIMA


FatCat Evo 4 & 6

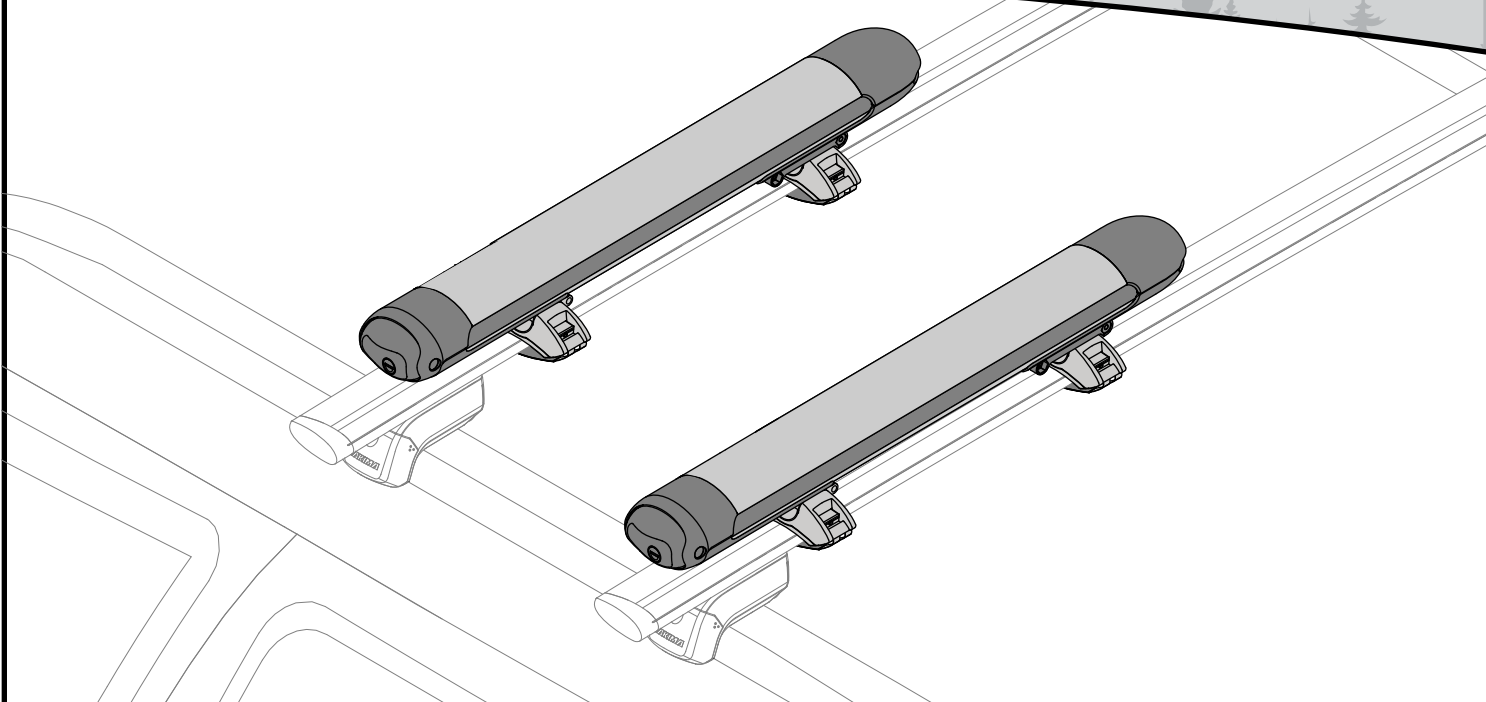

Contents

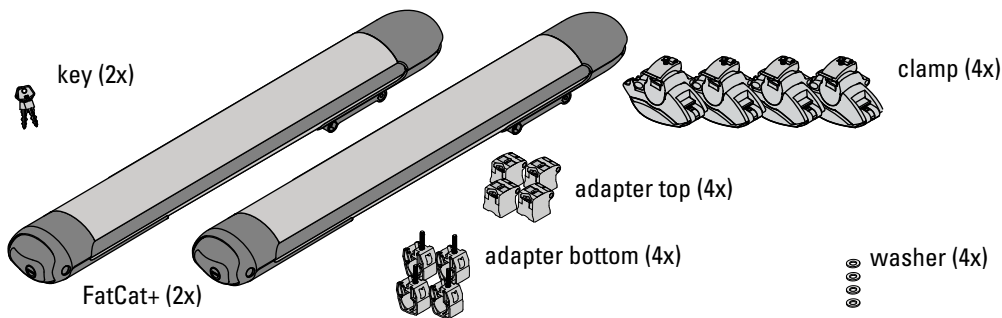

Available accessories



Smart-Slot Kit 2
#8003098


Crossbar spread

Skis and boards under 67": 12" - 24"


Skis and boards over 67": 12" - 36"

The distance between supporting bars should be adjusted so that when the bindings strike the ski rack, the skis cannot slip out on the other ski rack.

Aero bars

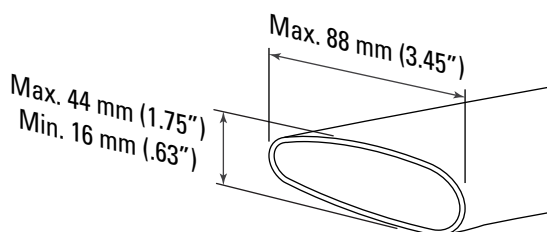

Square bar

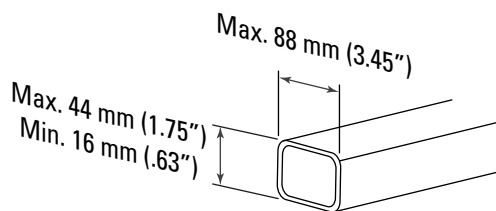


INSTALLATION



For round/square bar installation go to page 5.


2

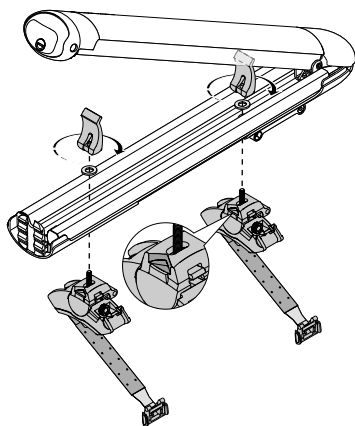

Press the button to open the FatCat Evo. Loosely attach the clamps by partially threading the knobs on. Keep them in the vertical position. Be sure to include the washers.



1

Remove the knobs from the clamps.




2X

Optional FatCat Evo 6 ONLY: If the usable space on your crossbar is 24" or less, or you want to bias the mount toward one side of your vehicle, use mounting position B.




4X

3

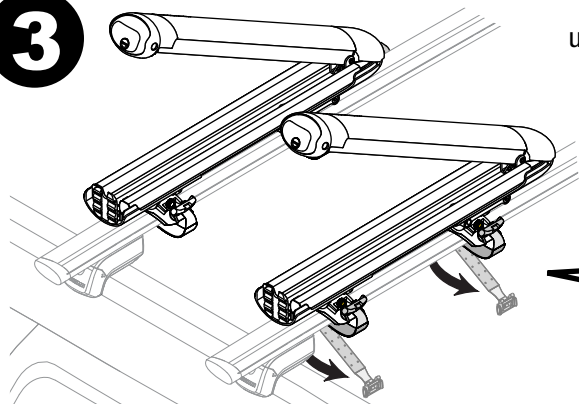


Place the mounts onto the crossbar. Route the strap under the crossbar, and hook the buckle into the clamp.

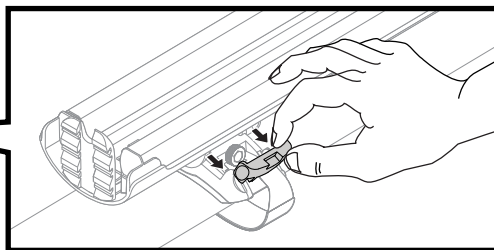


2X

4



The buckle must close with firm resistance. If it closes too easily, or does not stay closed, adjust the red wheel accordingly until the buckle closes with firm resistance.

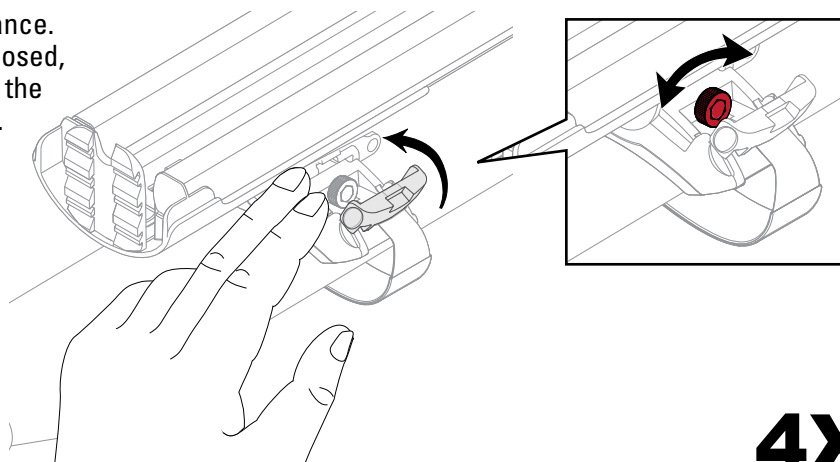

4X

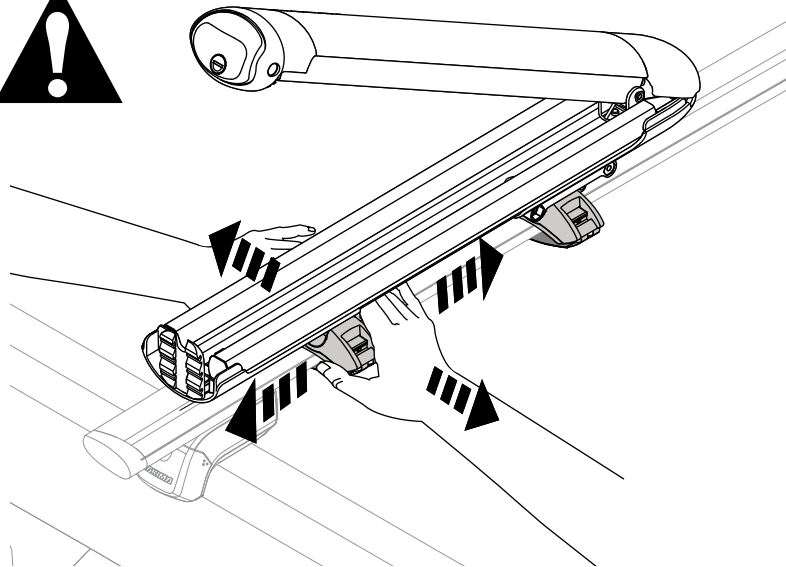5


Test the clamp installation by pushing and pulling each clamp in all directions. If the clamps move repeat step 4.

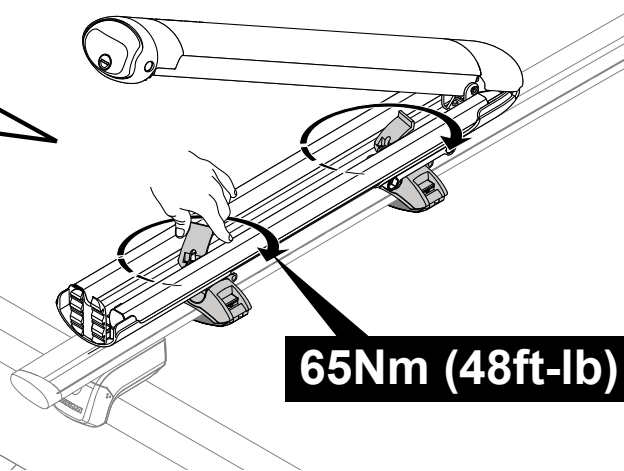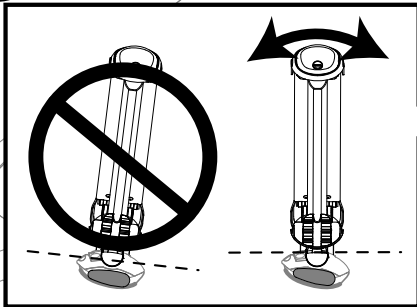4X**6**

Make sure the mounts are vertical, then fully tighten and close the knobs.

65Nm (48ft-lb)**4X****7**


Test the installation by pushing and pulling in all directions. If the mount is loose, return to step 4 and tighten the red wheel more.

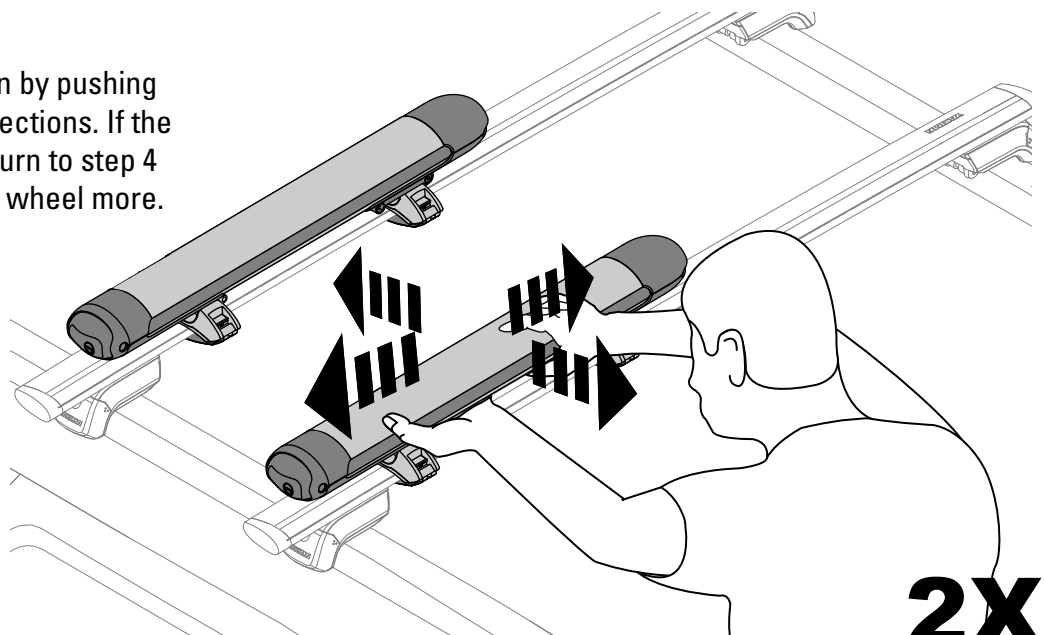**2X**

LOADING

1

Press the buttons and open the mounts. Load your skis keeping the tips toward the rear of the vehicle. Load bindings between the mounts. Close mounts with firm pressure.

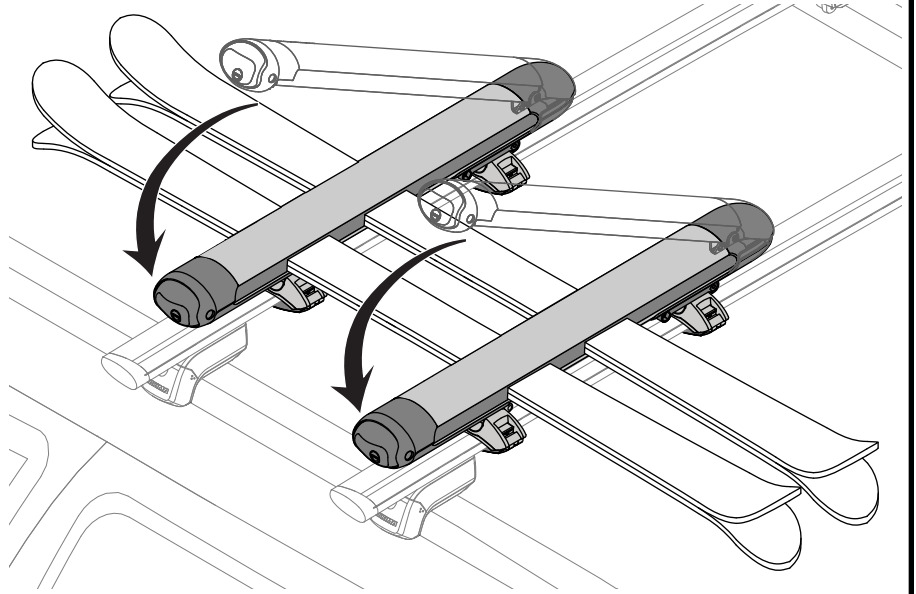

Note: In some cases you may need to close the mount between your bindings. Position them fore/ aft to best avoid hatch contact.




If your bindings contact the vehicle use the SkiLift feature. Go to page 5, or page 7 for round or square bars.

2X

2


Verify closure by pulling upward on the skis to see if the mount opens. If it opens, apply more pressure when closing the mount. Use the keys to lock your mounts.

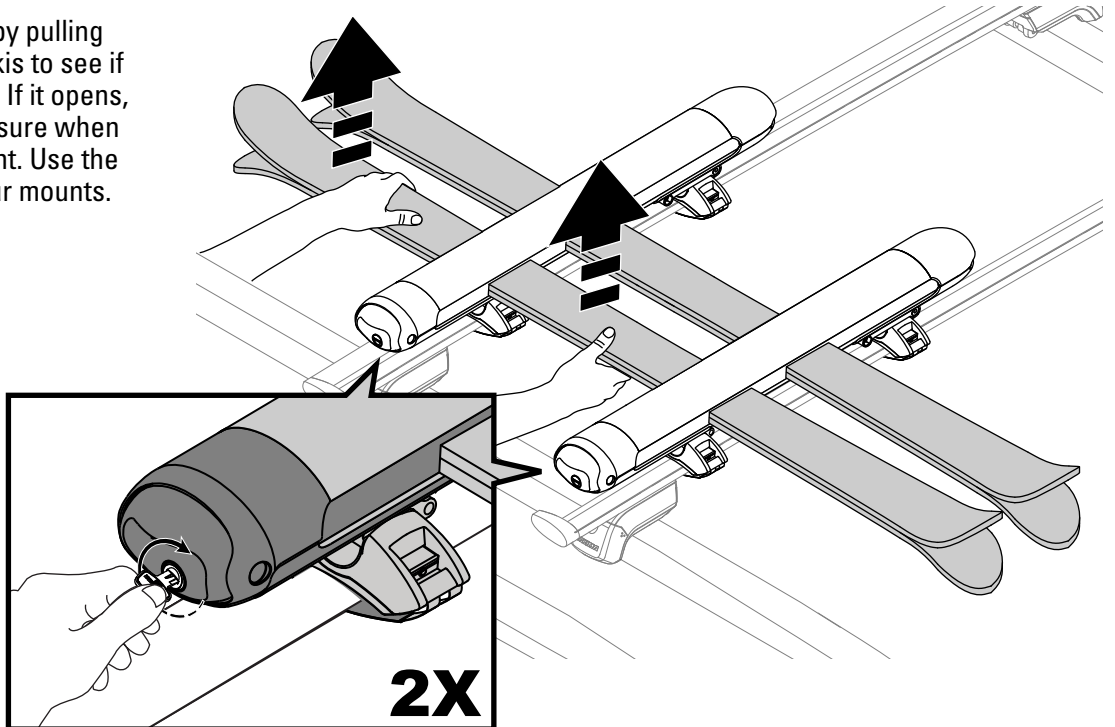

2X

ROUND/SQUARE BAR

A

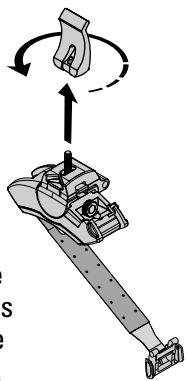


Remove the knobs from the clamps.


4X

Square Bar Only

1

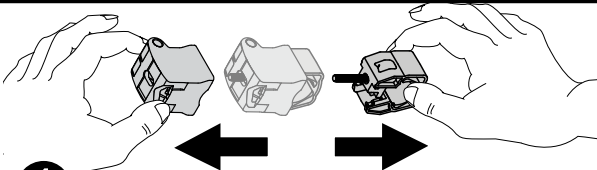


2

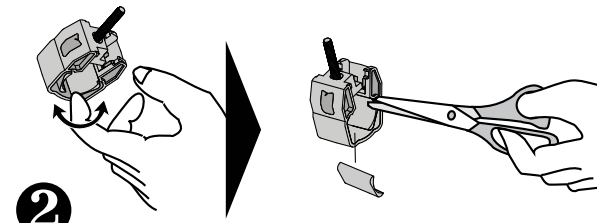

Cut out tabs.

B


Snap the adapters around crossbars.

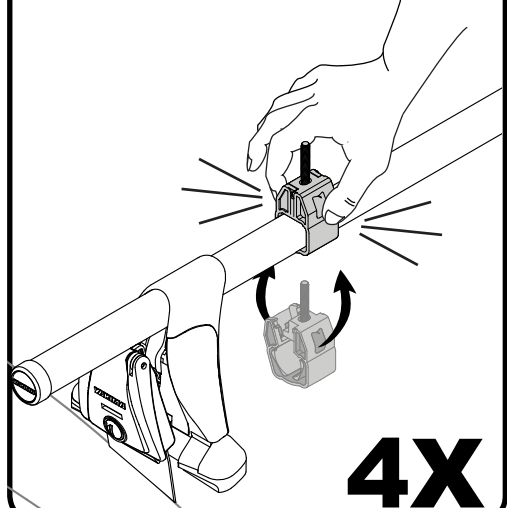

4X

C


Orient the arrows toward the front of the vehicle.

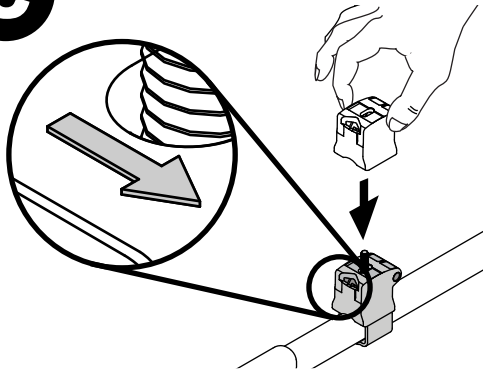

4X

D

Place the mounts onto the adapters.

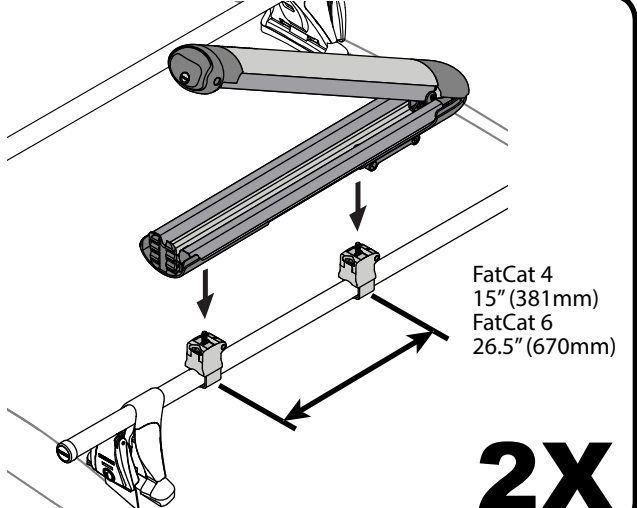


FatCat 4
15" (381mm)
FatCat 6
26.5" (670mm)

2X

E


Make sure the mounts are vertical, then fully tighten and close the knobs.

65Nm (48ft-lb)

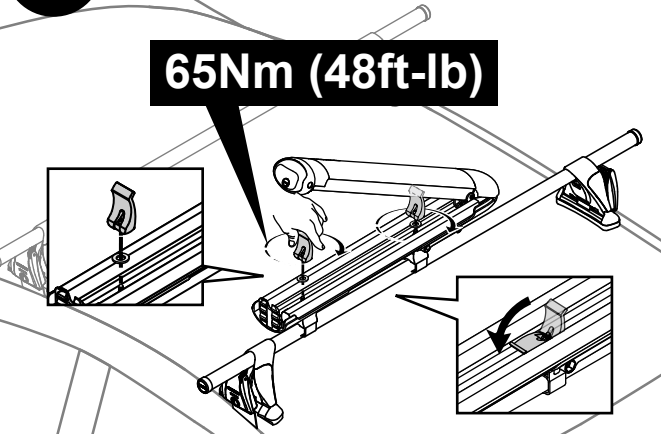

4X

F

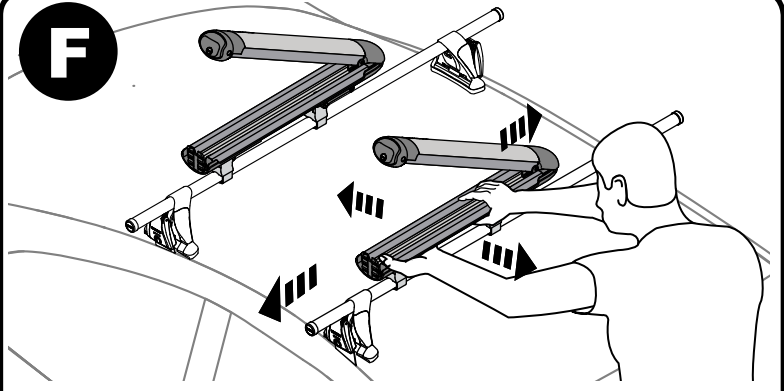











Test install.
Retighten knobs if necessary.

2X











G

Got to page 4 for loading instructions.

SKI LIFT • ENTRETOISE SKILIFT • CUÑA SKI LIFT

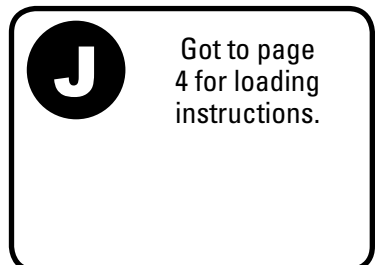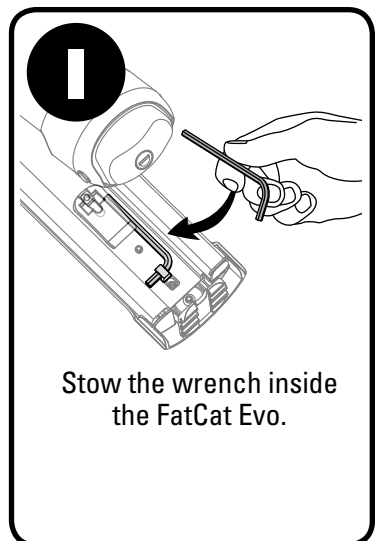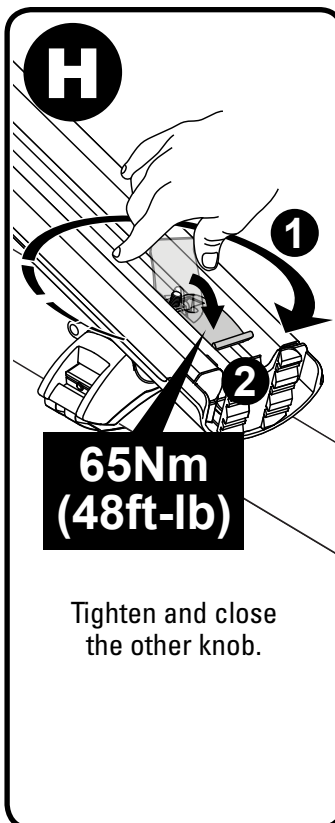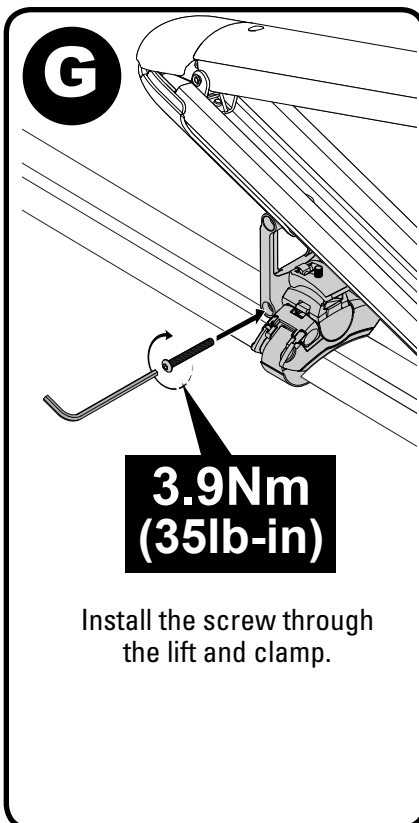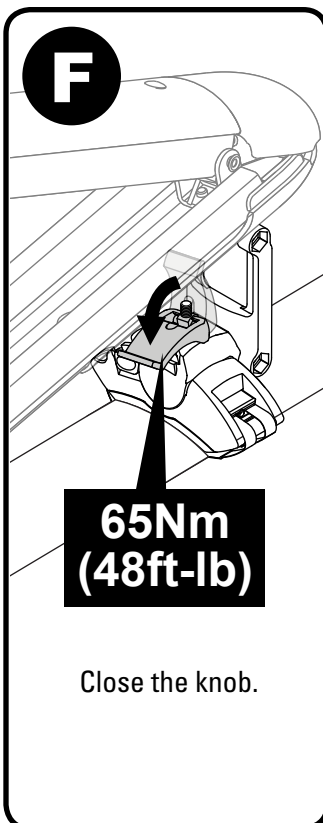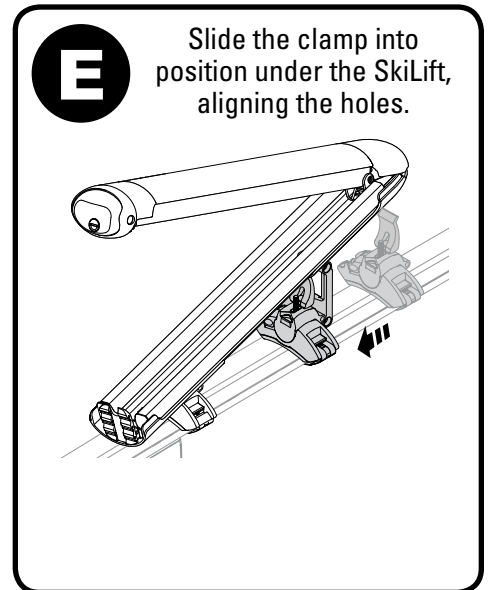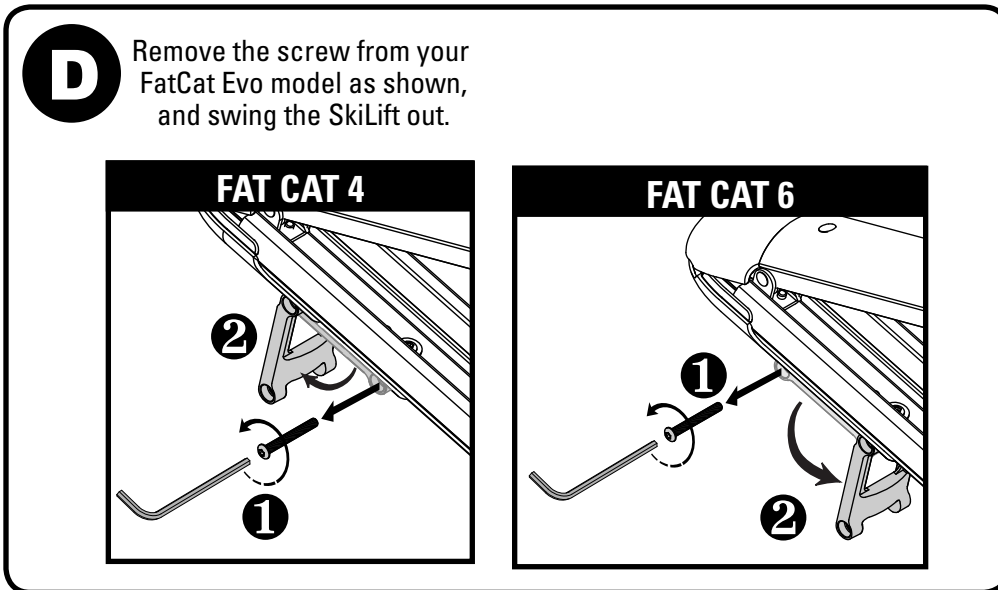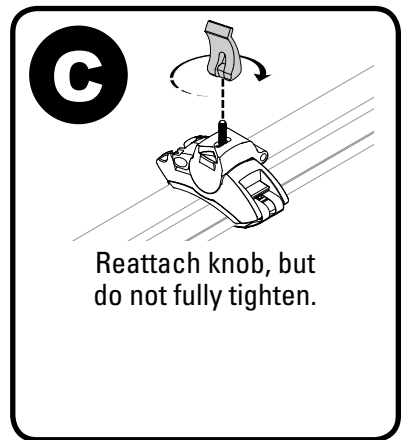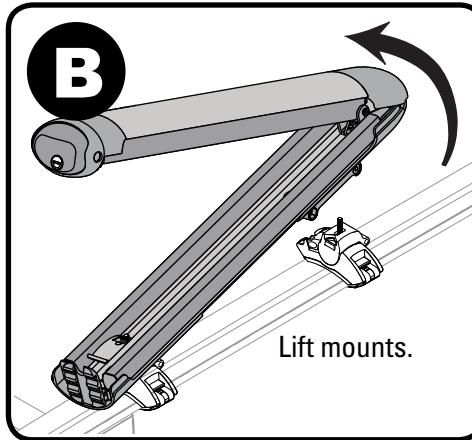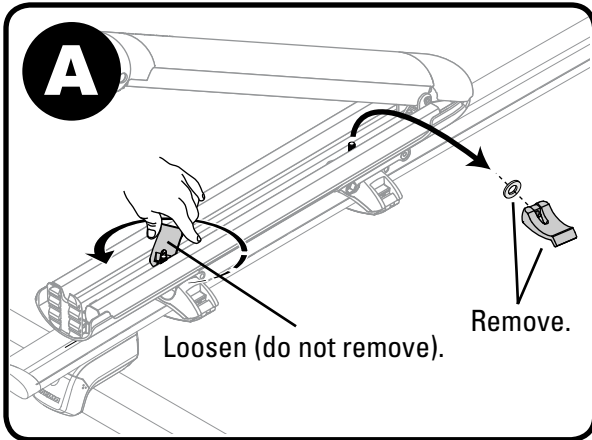

ROUND/SQUARE SKI LIFT

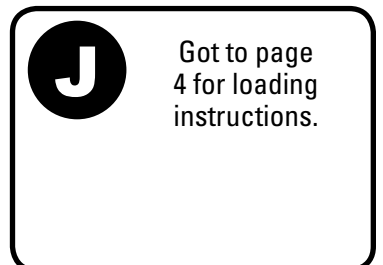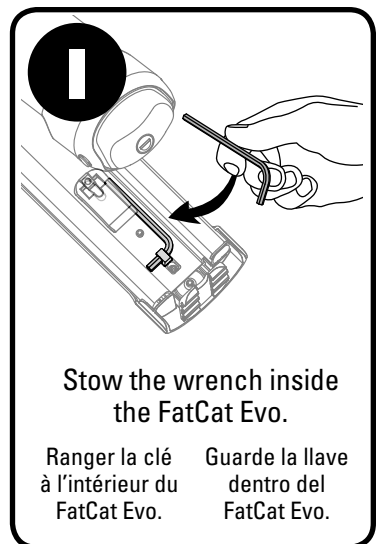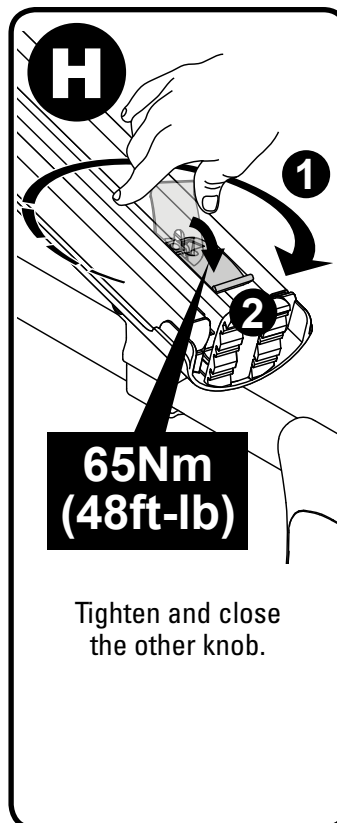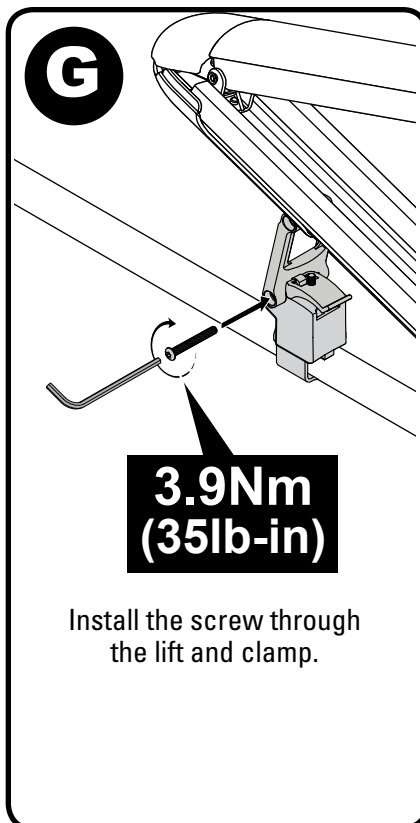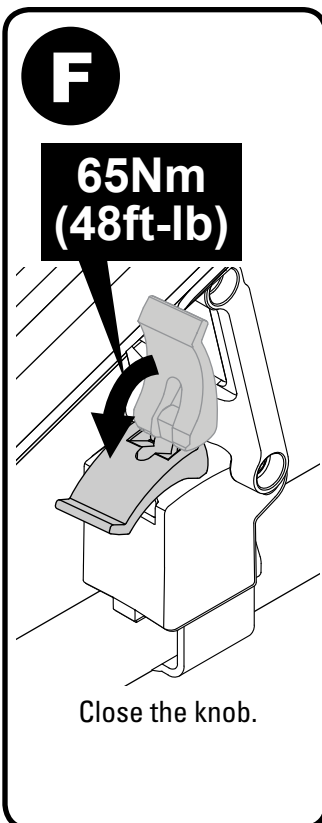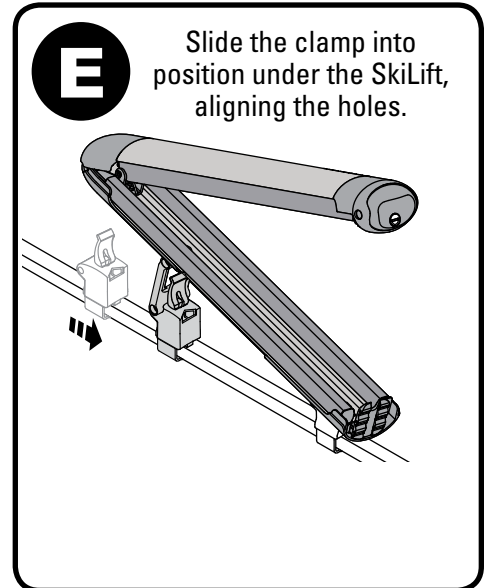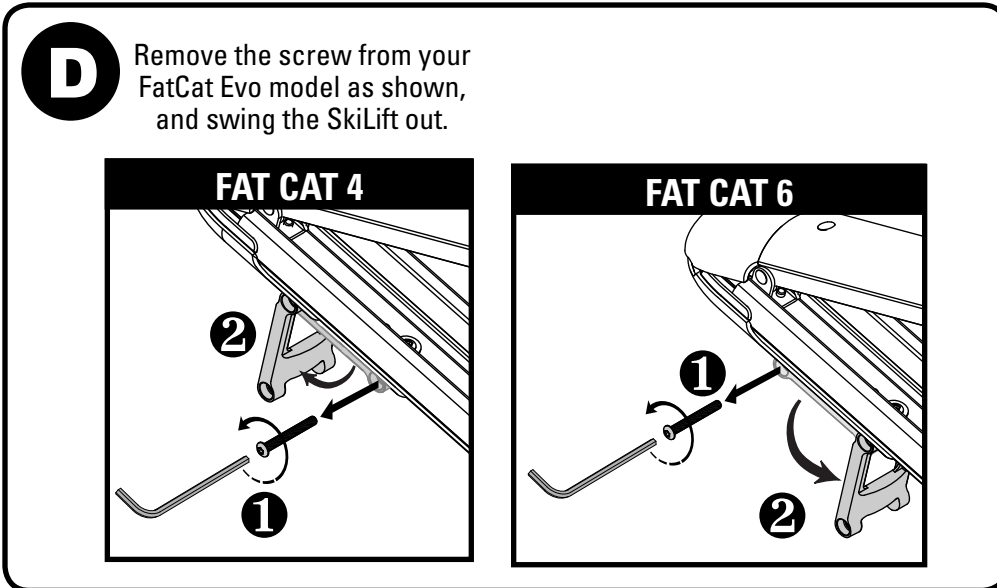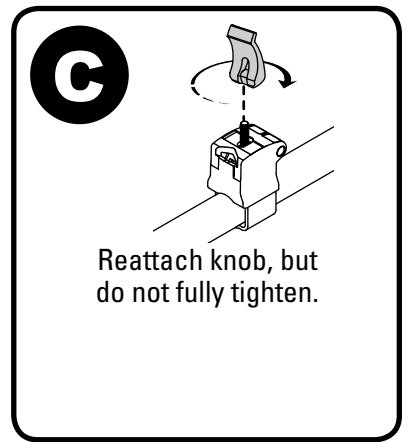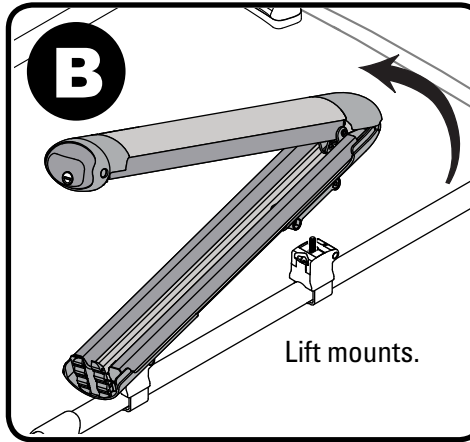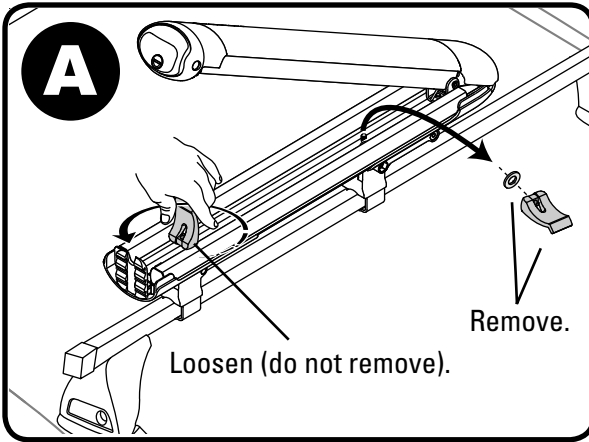


UNLOADING


1. Unlock the mounts.
2. Press the button to open the mounts.
3. Carefully remove your skis or boards.
4. Close and lock the mounts.

REMOVAL

1. Open and loosen knobs (do not remove them).
2. Unhook the buckle, and release the strap.
3. Carefully lift the mounts from your vehicle.

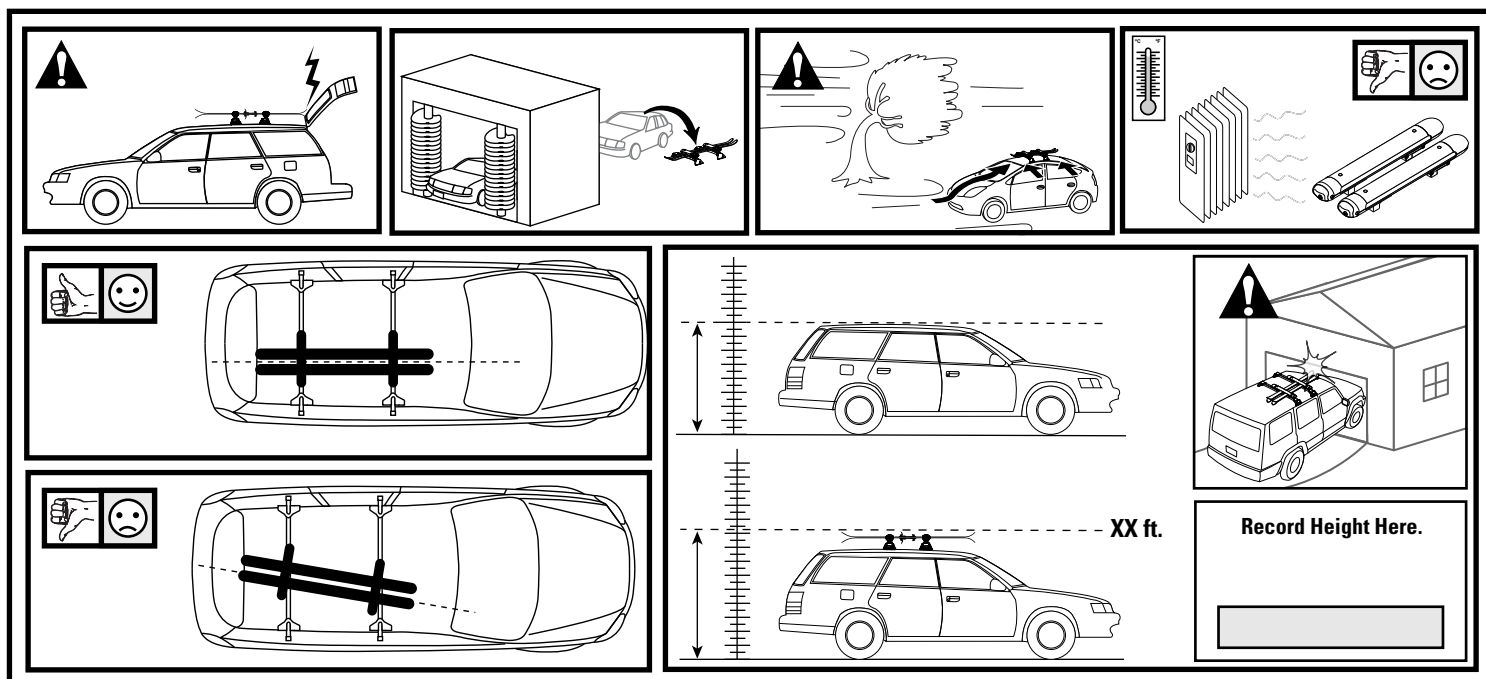

WEIGHT LIMITS

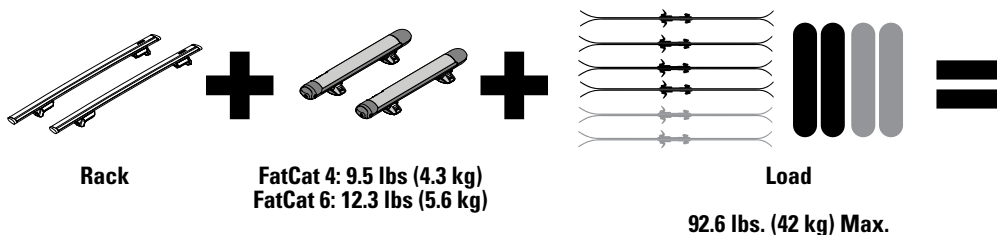

Not more than 165 lbs. (75 kg)
unless otherwise noted.

KEEP THESE INSTRUCTIONS!

EN IMPORTANT WARNINGS

Rack Installation

Inadequately secured loads and incorrectly mounted roof racks and accessory racks can come loose during travel and cause serious accidents! Therefore, installation, handling and use must be carried out in accordance with product and vehicle instructions.

In addition to these instructions, review the mounting instructions for the roof rack and the operating instructions of the vehicle.

These instructions should be kept together with the vehicle's operating instructions and carried in the vehicle when in use and en route.

For your own safety, you should only use roof racks that are authorized for use with your vehicle.

For roof racks that do not specify the distance between the front and rear crossbars, the distance shall be at least 700 mm or as large as possible. Please note that changes (e.g. additional drill holes) to the accessory rack's attachment system are not permissible.

Check attachment hardware and load for tight fit and function:

- Before the start of any journey.
- After driving a short distance following rack or load install.
- At regular intervals on longer journeys.
- More frequently on rough terrain.
- After interruption of a journey during which the vehicle was left unsupervised (check for damage due to outside intervention).

Rack Loading

Do not exceed the maximum load specified for the roof rack, accessory rack or the maximum load recommended by the vehicle manufacturer.

Max Roof Load = weight of roof rack + weight of accessory racks + weight of load.

Load shall be uniformly distributed with the lowest possible center of gravity.

Load should not substantially extend beyond the loading surface of the roof rack.

Boat Loading

Use all provided straps to secure the boat in accordance with the instructions. Bow and stern tiedown lines must be used!

Vehicle Driving and Regulations

The speed driven must be suited to the load transported and to official speed limits. In the absence of any speed limits, we recommend a maximum speed of 80 mph (130 km/h).

When transporting any load, the speed of the vehicle must take into account all conditions such as the state of the road, the surface of the road, traffic conditions, wind, etc. Vehicle handling, cornering, braking and sensitivity to side winds will change with the addition of roof top loads.

Off-road driving is not recommended and could result in damage to your vehicle or your gear.

Maintenance

The accessory rack should be carefully cleaned and maintained, particularly during the winter months. Use only a solution of water and standard car wash liquid without any alcohol, bleach or ammonium additives.

For reasons of fuel economy and the safety of other road users, the accessory rack and roof rack should be removed when not in use.

Periodically inspect accessory rack for damage. Replace lost, damaged or worn parts. Use only original spare parts obtained from a stocking specialist, dealer or manufacturer.

Any changes made to the roof racks and accessory racks as well as the use of spare parts or accessories other than those supplied by the manufacturer will lead to the lapsing of the manufacturer's warranty and liability for any material damage or accidents. You should observe these instructions to the letter and only use the original parts supplied.

Record Your Key Number:
(located on the set of
locking keys)

--	--	--	--