

ZROADZ DYNAMIC LED MOUNTING SOLUTIONS



ZROADZ

LICENSE PLATE FRAM LED LIGHT MOUNTS Z310005-KIT

INSTALLATION GUIDE

PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. Auto makers offer varied models to each vehicle and occasionally manufacture more than one body style of the same model.

PARTS INCLUDED

Z310005-KIT

- (1) License Plate Frame w/ Dual Pod LED Mounts



BEFORE YOU BEGIN

START HERE

LED LIGHT BRACKET INSTALLATION

START HERE: Turn off engine, chalk tires with stop block, open the hood and disconnect the battery.



1) If the vehicle is STEP 1 currently equipped with an existing license plate frame, remove it by loosening the screws. Leave State issued License Plate in place.

> **MOVE ONTO** STEP 2

HARDWARE INCLUDED

- (2) M8 x 12 Hex Head Bolts
- (2) M8 Split Lock Washers
- (2) M8 Hex Nuts

TOOLS REQUIRED

- Various Socket Set
- Various Wrenches
- Ratchet Tool
- Ratchet Extensions

STEP 2

2) Leave State issued License Plate in place.

SEE FIGURE 2 FIG 2 MOUNTING FRAME MOUNTING SCREWS (NOT PROVIDED) LICENSE PLATE


PAGE 1



ZROADZ

DYNAMIC LED MOUNTING SOLUTIONS

LED LIGHT BRACKET INSTALLATION - CONTINUED

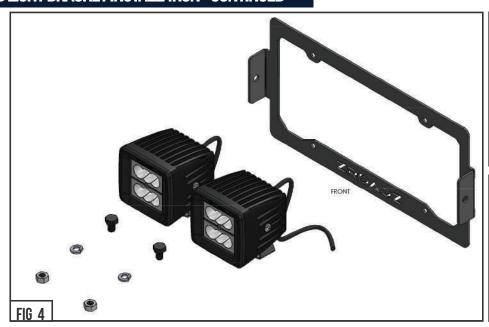

STEP 3

SEE FIGURE 3

3) Put into place the ZROADZ LED Light Frame Mount onto and over the License Plate.

Use hardware removed in Step #1 to secure Light Frame Mount in position.

STEP 4

4) Mount (1) LED Light onto each mounting bracket ear located on either side of new ZROADZ Frame. For Now, Hand tighten

mounting bolts.



STEP 5

Wire LED Light with a ZROADZ optional wiring harness kit (part# Z390020S-A) or by utilizing a compatible custom wiring harness. ZROADZ recommends LED Lights be wired with ZROADZ harness kit (part# Z390020S-A).

STEP 6 ADJUSTMENT TIPS

6) To adjust the angle of your Light Bar, rotate the LED(s) to adjust the angles till your desired light pattern is reached. You may than tighten the hardware and also mounting bracket to hood and secure everything into place. Note your tape marker under hood to check for proper alignment. Be careful not to over tighten the mounting hardware.

It is best to adjust the angle with the vehicle on level ground with lights facing a wall, garage door or other solid barrier. We recommend checking from a distance of 25'. Your installation is now completed.

FINISHED EXAMPLES



FIG 7

LED LIGHT BRACKET INSTALLATION - PROCESS COMPLETE

PAGE 2





PRODUCT CARE INFORMATION

PRODUCT CARE INFORMATION

Wash regularly as you would when caring for your vehicles. Never use dish soap. Never leave wet water spots as that may leave a blemish.

MATTE BLACK FINISH

Paint warranty applies to defects in material and / or workmanship, it does not cover the matte finish surface appearance.

To enjoy the matte appearance for many years to come, please follow these owner care and maintenance tips. Get a no-shine matte car wash soap that uses no fillers, no silicone, and won't strip your matte paint of its layer of protection.

Do not use wax, detail spray, armorall®, or any products made for normal paint. Use only products specifically developed for matte finish paint. Do not use products that are even mildly abrasive, such as polishes, glazes, or rubbing compounds. Do not use mechanical cleaners or polishers. Do not use terrycloth, cloth, or paper towels. Do not rub the finish vigorously, this will burnish the paint finish, causing a permanent shiny spot. Shiny spots cannot be removed.

Do not use commercial car wash facilities or their shine enhancement products. Most car wash brushes, large mechanized "towels," and shine enhancement products can damage matte paint.

Remove foreign substances such as insect remains, tar, and road debris using a soft applicator and a mild solvent; saturate and soak area before cleaning-rub lightly.

Hand-wash with a soft wash mitt and mild cleaning product safe for matte paint. Use microfiber cleaning cloths with alcohol-based window cleaner for basic surface clean-up.

GLOSS BLACK FINISH

ZROADZwith Gloss Black Powder Coated Finish may be washed regularly as you would when caring for your vehicles finish using soap and water. ZROADZshould be waxed at the same time that you wax the vehicle. As a general rule, anything you use to clean your vehicles painted surfaces can be used to clean and maintain your ZROADZ grille. A Gloss powder Coated Finish can be cared for in the same fashion that you would care for your vehicles factory paint job. Never leave wet water spots as that may leave a blemish.