


SPEK™ GAUGE WIRING DIAGRAM



J1

1	2	3	4	5	6
7	8	9	10	11	12

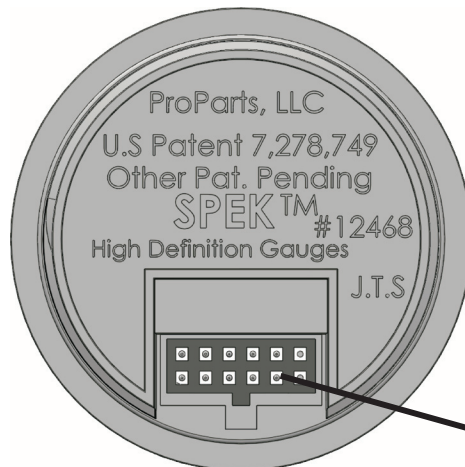


J1

Black Lead - Ground
Pin 3


Red Lead - +5
Pin 4

White Lead -
Output .5 - 4.5 V
Pin 2

Pressure Sensor
Wiring



J1

- 1 - PWM - (Yellow) - Data Logger Out
- 2 - Voltage - Fuel Level - Blue
Temperature - (Red) - Thermistor
Pressure Input - (Green/White) (.5V to 4.5V)
- 3 - Input Ground - (Black)(From Sensor)
- 4 - +5V Output to Sensor - (Red/White)
- 5 - Fet Out - (Purple)
- 6 - Dimmer - (White)
- 7 - (N/C)
- 8 - Battery +12VDC - (Red)
- 9 - Thermocouple (-) - (Red) - EGT
- 10 - Thermocouple (+) - (Yellow) - EGT
- 11 - Tachometer - (Green)
- 12 - Ground - (Black) 

Pin 3
Black Wire - Ground

Pin 2
Red Wire - Input

Temp Sensor
Wiring

