



Installation instructions for part 70-1692

## Universal import lead providing power and 4-speaker capabilities 70-1692

### HARNESS FEATURES


- Provides power and 4-speaker capabilities

### INTRODUCTION

Locate the applicable vehicle. Using the information in the chart, splice the stripped ends of the plug(s) to the corresponding wires of your new radio, amp or EQ. Isolate and individually tape off the ends of any unused wires to prevent electrical short circuit. Plug into your vehicle's existing wire harness and test before installing.

*N/F = no function*

*\* = may not be present in all models*

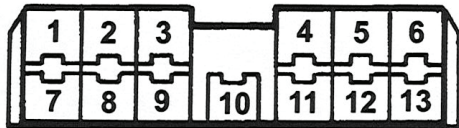

*Use the diagram for all applications (insertion view)*

### TOOLS REQUIRED

- Crimping tool

**CAUTION!** All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.

**Chevrolet Spectrum 1985-1986**  
**Isuzu Impulse 1984-1986 /**  
**I-Mark 1985-1986 /**  
**Pickup 1986-1987 /**  
**Trooper 1986-1991**

- |                |                   |
|----------------|-------------------|
| 1. Red         | LR+               |
| 2. Yellow      | RR+               |
| 3. Orange      | *Illumination     |
| 4. Pink        | 12 Volt Switched  |
| 5. White       | LF+               |
| 6. Blue/White  | RF+               |
| 7. White/Black | LR-               |
| 8. Gray/Red    | RR-               |
| 9. Black       | Chassis Ground    |
| 10. Brown      | N/F               |
| 11. Gray/Black | *12 Volt Constant |
| 12. Green      | LF-               |
| 13. Violet     | RF-               |

**Dodge Monaco 1990-1992**  
**Eagle Medallion 1989**  
**Premier 1988-1992**  
**Jeep Cherokee 1988-1992**  
**Comanche 1998-1992**  
**Grand Wagoneer 1988-1991**  
**Wrangler 1988-1994**

- |                |                  |
|----------------|------------------|
| 1. Red         | 12 Volt Switched |
| 2. Yellow      | Dimmer           |
| 3. Orange      | RF+              |
| 4. Pink        | R-               |
| 5. White       | RR+              |
| 6. Blue/White  | 12 Volt Constant |
| 7. White/Black | Chassis Ground   |
| 8. Gray/Red    | N/F              |
| 9. Black       | LF+              |
| 10. Brown      | Power Antenna    |
| 11. Gray/Black | L-               |
| 12. Green      | LR+              |
| 13. Violet     | N/F              |

(Note: Ground radio to vehicle chassis)

**Chrysler Conquest 1987-1989**

**Dodge Colt 1987-1994 / Colt Vista 1987-1991 / Raider 1987-1989 /**  
**Ram Pickup 1987-1993 / Plymouth Laser 1990-1994**  
**Colt 1987-1994 / Colt Vista 1987-1994**  
**Mitsubishi Cordia 1987-1988 /Diamante 1992-1994 /**  
**Eclipse 1990-1994 / Expo 1992-1994 / Galant 1987-1993**  
**Might Max Pickup 1987-1994 Mirage 1987-1994 /**  
**Montero 1987-1994 / Sigma 1989-1990 / Starion 1987-1989 /**  
**Tredia 1987-1988 / Van 1987-1991**  
**Eagle Summit 1989-1994 / Talon 1990-1994**

(First of 2 required)

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | RF+              |
| 3. Orange      | RR+              |
| 4. Pink        | Reverse Dimmer   |
| 5. White       | Illumination     |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | N/F              |
| 9. Black       | LF+              |
| 10. Brown      | LR+              |
| 11. Gray/Black | 12 Volt Constant |
| 12. Green      | 12 Volt Switched |
| 13. Violet     | N/F              |

(Second of 2 required)

- |                |     |
|----------------|-----|
| 1. Red         | N/F |
| 2. Yellow      | N/F |
| 3. Orange      | LR- |
| 4. Pink        | LF- |
| 5. White       | N/F |
| 6. Blue/White  | N/F |
| 7. White/Black | N/F |
| 8. Gray/Red    | N/F |
| 9. Black       | RR- |
| 10. Brown      | N/F |
| 11. Gray/Black | RF- |
| 12. Green      | N/F |
| 13. Violet     | N/F |

(Note: Ground radio to vehicle chassis)

**Hyundai Excel 1986-1991**

**Mitsubishi Precis 1987-1991**

- |                |                  |
|----------------|------------------|
| 1. Red         | LR+              |
| 2. Yellow      | LF+              |
| 3. Orange      | 12 Volt Switched |
| 4. Pink        | RF+              |
| 5. White       | RR+              |
| 6. Blue/White  | N/F              |
| 7. White/Black | LR-              |
| 8. Gray/Red    | LF-              |
| 9. Black       | 12 Volt Constant |
| 10. Brown      | N/F              |
| 11. Gray/Black | RF-              |
| 12. Green      | RR-              |
| 13. Violet     | N/F              |

(Note: Ground radio to vehicle chassis)

**Dodge Colt Vista / Colt 1985-1986  
Mitsubishi Cordia / Mirage /  
Montero / Starion /  
Tredia 1985-1986**

- |                |                  |
|----------------|------------------|
| 1. Red         | Reverse Dimmer   |
| 2. Yellow      | LR-              |
| 3. Orange      | RR-              |
| 4. Pink        | LF+              |
| 5. White       | RF-              |
| 6. Blue/White  | 12 Volt Switched |
| 7. White/Black | 12 Volt Constant |
| 8. Gray/Red    | N/F              |
| 9. Black       | LR+              |
| 10. Brown      | RR+              |
| 11. Gray/Black | LF-              |
| 12. Green      | RF+              |
| 13. Violet     | Illumination     |

(Note: Ground radio to vehicle chassis)

**Daihatsu 1988-1992 / Toyota 1982-1986**
**front speaker/power connector**

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | RF+              |
| 3. Orange      | LF+              |
| 4. Pink        | 12 Volt Switched |
| 5. White       | **Power Antenna  |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | RF-              |
| 9. Black       | LF-              |
| 10. Brown      | Chassis Ground   |
| 11. Gray/Black | Amp Turn-On      |
| 12. Green      | Dimmer           |
| 13. Violet     | N/F              |

(\*\*also required #11 wire to be connected)

**rear speaker/memory connector**

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | N/F              |
| 3. Orange      | RR+              |
| 4. Pink        | LF+              |
| 5. White       | N/F              |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | N/F              |
| 9. Black       | RR-              |
| 10. Brown      | 12 Volt Constant |
| 11. Gray/Black | LR-              |
| 12. Green      | N/F              |
| 13. Violet     | N/F              |

**Dodge D-50 Pickup 1983-1986  
Mitsubishi Pickup 1983-1986**

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | Right Door +     |
| 3. Orange      | N/F              |
| 4. Pink        | Reverse Dimmer   |
| 5. White       | Dimmer           |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | Speaker Common   |
| 9. Black       | Left Door +      |
| 10. Brown      | N/F              |
| 11. Gray/Black | N/F              |
| 12. Green      | 12 Volt Switched |
| 13. Violet     | N/F              |

(Note: Ground radio to vehicle chassis)

**Subaru XT coupe 1985-1991**

- |                |                  |
|----------------|------------------|
| 1. Red         | 12 Volt Switched |
| 2. Yellow      | Dimmer           |
| 3. Orange      | RF+              |
| 4. Pink        | R-               |
| 5. White       | RR+              |
| 6. Blue/White  | 12 Volt Constant |
| 7. White/Black | Chassis Ground   |
| 8. Gray/Red    | N/F              |
| 9. Black       | LF+              |
| 10. Brown      | Power Antenna    |
| 11. Gray/Black | L-               |
| 12. Green      | LR+              |
| 13. Violet     | N/F              |



## Installation instructions for part 70-1692

### Toyota Corona 1979-1982

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | RR+              |
| 3. Orange      | RF+              |
| 4. Pink        | Chassis Ground   |
| 5. White       | N/F              |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | LR+              |
| 9. Black       | LF+              |
| 10. Brown      | 12 Volt Switched |
| 11. Gray/Black | Speaker Common   |
| 12. Green      | N/F              |
| 13. Violet     | N/F              |

### Chevrolet Sprint 1985-1988

Spectrum 1987-1989  
Geo Prizm 1993-1994  
Metro 1989-1994 / Tracker 1989-1994  
Storm 1990-1993  
Isuzu Amigo 1989-1994 /  
I-Mark 1987-1989  
Impulse 1987-1993 / Rodeo 1991-1994  
Stylus 1991-1993 / Pickup 1988-1994  
Trooper 1992-1994  
Pontiac LeMans 1988-1993

- |                |                  |
|----------------|------------------|
| 1. Red         | LR+              |
| 2. Yellow      | RR+              |
| 3. Orange      | Reverse Dimmer   |
| 4. Pink        | 12 Volt Switched |
| 5. White       | LF+              |
| 6. Blue/White  | RF+              |
| 7. White/Black | LR-              |
| 8. Gray/Red    | RR-              |
| 9. Black       | Chassis Ground   |
| 10. Brown      | Illumination     |
| 11. Gray/Black | 12 Volt Constant |
| 12. Green      | LF-              |
| 13. Violet     | RF-              |

### Dodge Colt Vista / Conquest 1984

Colt 1979-1984 / Champ 1979-1982  
Challenger 1981-1983  
Sapporo 1981-1984  
Mitsubishi Cordia 1983-1984  
Montero 1983-1984 /  
Starion 1983-1984  
Tredia 1983-1984

- |                |                  |
|----------------|------------------|
| 1. Red         | N/F              |
| 2. Yellow      | RF+              |
| 3. Orange      | RR+              |
| 4. Pink        | Reverse Dimmer   |
| 5. White       | Dimmer           |
| 6. Blue/White  | N/F              |
| 7. White/Black | N/F              |
| 8. Gray/Red    | Speaker Common   |
| 9. Black       | LF+              |
| 10. Brown      | LR+              |
| 11. Gray/Black | 12 Volt Constant |
| 12. Green      | 12 Volt Switched |
| 13. Violet     | N/F              |

(Note: Ground radio to vehicle chassis)