


# Installation Instructions

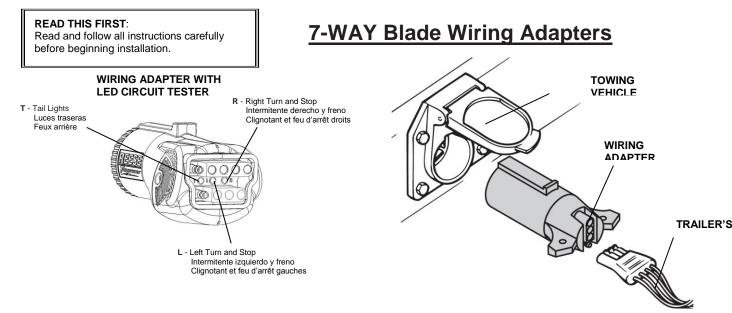

VEHICLE'S CONNECTOR	FUNCTIONS OF WIRING ADAPTER	TRAILER'S PLUG	CCP P/N
7-Way Blade, RV Type	7-Way Blade To 4-way Flat	4-way Flat	74607
	7-Way Blade To 4-way Flat with LED tester		78116
	7-Way Blade To 4-way Flat, Retractable		78007
	7-Way Blade To 4-way Flat Tow-Glo		78117
	7-Way Blade To 6-way Round	6-way Round Pin	85216 74685
	Combo 7-Way Blade To 6 way Round with Back-up alarm		74680
	Combo 7-Way Blade To 7-way Blade with Back-up alarm	7-way Blade	74679
	Combo 7-Way Blade To 4 & 5 way Flat with Back-up alarm	4-way or 5-way Flat	74678
	Combo 7-Way Blade To 4 & 5 way Flat		85212
	Combo 7-Way Blade To 4 & 5 way Flat with LED tester		78118
	Combo 7-Way Blade To 4 & 5 Flat with LED tester & 12V outlet		78119
	Combo 7-Way Blade To 6-way Round & 4 Flat with LED tester	6-way Round Pin or 4-way Flat	85350*

Plug wiring adapter into tow vehicle side connector to allow electrical connections between 7-way Blade Receptacle with variety of the trailer Plugs.

#### NOTE:

Wiring Adapters equipped with the built-in LED circuit testers will confirm that each connection is operating properly. Refer to the LED lights diagram shown.



### **INSTANT SWITCH INSTRUCTIONS \*:**

- Determine which circuit is located on the center pin of the 6-PIN Trailer Connector (either BRAKE or Auxiliary).
  Clide suittee as bettern of Advantanta events with the trailer
- 2. Slide switch on bottom of Adapter to match with the trailer Center Pin function.
- 3. Test connections to be sure all circuits are connected properly before towing.

## WARNING

All connections must be complete to function properly. Test and verify installation with a test light, circuit tester or trailer once installed.

### WARNING

Overloading circuit can cause fires. **DO NOT** exceed lower of towing manufacturer rating or:

- Max. Right Turn, Left Turn, Stop, & Tail Light Circuits: (7.5 amps)
- Max. (+) Battery, Reverse, and Electric Brake Circuits: (30 amps)

Read vehicle's owners manual & instruction sheet for additional information. Additional fusing maybe required.

March 15, 2011