

AZENIS FK453

FLAGSHIP SUMMER PERFORMANCE BRED FROM RACING DNA


The **AZENIS FK453** is the latest generation of Falken's flagship ultra high performance tires available in a wide array of sizes from 17-inch to 22-inch rim diameters. Fitments include popular staggered applications making this tire suitable for high-end vehicles. In addition, the FK453 features the latest developments in noise-absorption technology which help provide a quiet and comfortable ride. A silica enriched compound is utilized for confident dry and wet performance. Rated with W, Y, and (Y) speed ratings, this tire is composed of nylon-reinforced layers allowing for enhanced high-speed stability.



TIRE HIGHLIGHTS


W, Y, & (Y) Speed Ratings

17" – 22" Rim

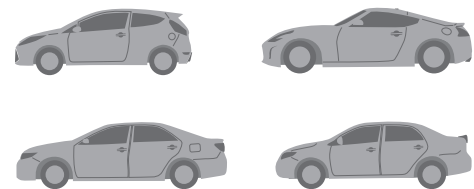

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
17"	205/40ZR17	XL	84W	28603707	7.5	7.0 - 8.0	23.4	8.6	886	7.0	10	19	50	1102	300-AA-A
	205/50ZR17	XL	93Y	28605701	6.5	5.5 - 7.5	25.1	8.5	834	7.1	10	22	50	1433	300-AA-A
	215/45ZR17	XL	91Y	28605704	7.0	7.0 - 8.0	24.6	8.6	842	7.4	10	24	50	1356	300-AA-A
	215/50ZR17	-	91W	28603771	7.0	6.0 - 7.5	25.6	9.0	823	7.4	10	24	51	1356	300-AA-A
	225/45ZR17	XL	94Y	28605706	7.5	7.0 - 8.5	24.9	9.0	832	7.8	10	25	50	1477	300-AA-A
	225/50ZR17	XL	98Y	28605772	7.0	6.0 - 8.0	26.0	9.2	808	7.8	10	26	50	1653	300-AA-A
	235/40ZR17	XL	94Y	28605702	8.5	8.0 - 9.5	24.4	9.7	854	8.2	10	24	50	1477	300-AA-A
	235/45ZR17	XL	97Y	28605710	8.0	7.5 - 9.0	25.3	9.6	823	8.0	10	25	50	1609	300-AA-A
	235/50ZR17	XL	100W	28603773	7.5	6.5 - 8.5	26.3	9.8	800	8.1	10	27	50	1764	300-AA-A
	235/55ZR17	XL	103W	28603725	7.5	6.5 - 8.5	27.2	9.8	776	8.1	10	28	50	1929	300-AA-A
	245/40ZR17	XL	95Y	28605709	8.5	8.0 - 9.5	24.6	10.0	842	8.4	10	25	50	1521	300-AA-A
	245/45ZR17	XL	99Y	28605712	8.0	7.5 - 9.0	25.6	9.8	818	8.3	10	25	50	1709	300-AA-A
	255/40ZR17	XL	98Y	28605703	9.0	8.5 - 10.0	25.0	10.5	832	8.7	10	26	50	1653	300-AA-A
	275/40ZR17	-	98Y	28605714	9.5	9.0 - 11.0	25.6	11.2	813	9.4	10	28	51	1653	300-AA-A

More sizes on the next page

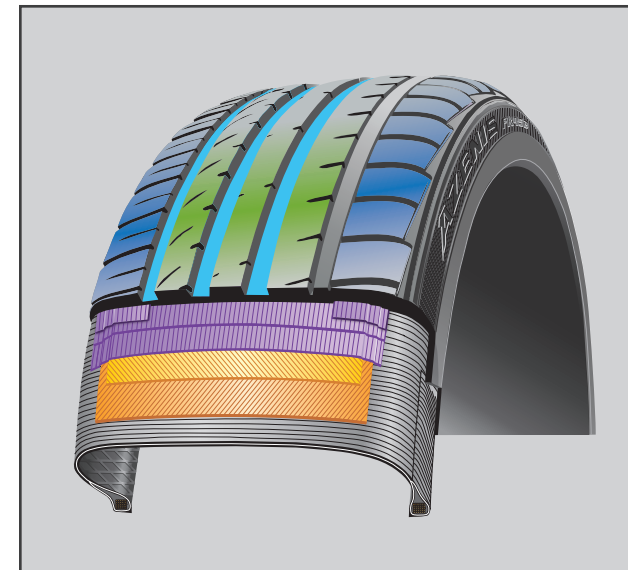

SILICA ENRICHED COMPOUND
designed and tested to meet the demands of European roads, the new silica based compound provides superior traction and grip in wet and dry conditions.

ASYMMETRIC VARIABLE TREAD DESIGN
with large outside shoulder blocks, provide enhanced wet and dry handling while reducing tire noise.

THREE WIDE CIRCUMFERENTIAL GROOVES
effectively evacuate water and significantly enhance hydroplaning resistance for enhanced wet handling.

RIGID CARCASS
retains the tire profile during some of the most extreme driving conditions, helping to enhance high speed stability and handling.

AZENIS FK453



Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
18"	215/35ZR18	XL	84Y	28605882	7.5	7.0 - 8.5	23.9	8.7	862	7.6	10	22	50	1102	300-AA-A
	215/40ZR18	XL	89Y	28605813	7.5	7.0 - 8.5	24.8	8.7	837	7.4	10	23	50	1279	300-AA-A
	215/45ZR18	XL	93Y	28605899	7.0	7.0 - 8.0	25.6	8.6	808	7.4	10	25	50	1433	300-AA-A
	225/40ZR18	XL	92Y	28605802	8.0	7.5 - 9.0	25.1	9.2	826	7.9	10	24	50	1389	300-AA-A
	225/45ZR18	XL	95Y	28605812	7.5	7.0 - 8.5	25.9	9.1	805	7.8	10	25	50	1521	300-AA-A
	225/50ZR18	-	95W	28603805	7.0	6.0 - 8.0	26.9	9.3	781	7.8	10	27	51	1521	300-AA-A
	235/40ZR18	XL	(95Y)	28605816	8.5	8.0 - 9.5	25.3	9.7	818	8.2	10	26	50	1521	300-AA-A
	235/45ZR18	XL	98Y	28605895	8.0	7.5 - 9.0	26.3	9.6	793	8.0	10	27	50	1653	300-AA-A
	235/50ZR18	XL	101W	28603825	7.5	6.5 - 8.5	27.3	9.8	771	8.1	10	29	50	1819	300-AA-A
	245/35ZR18	XL	92Y	28605804	8.5	8.0 - 9.5	24.7	9.9	837	8.7	10	25	50	1389	300-AA-A
	245/40ZR18	XL	(97Y)	28605806	8.5	8.0 - 9.5	25.6	9.9	808	8.4	10	27	50	1609	300-AA-A
	245/45ZR18	XL	100Y	28605810	8.0	7.5 - 9.0	26.6	9.8	783	8.3	10	28	50	1764	300-AA-A
	255/35ZR18	XL	94Y	28605801	9.0	8.5 - 10.0	25.0	10.3	832	9.1	10	27	50	1477	300-AA-A
	255/40ZR18	XL	(99Y)	28605890	9.0	8.5 - 10.0	26.0	10.5	800	8.7	10	27	50	1709	300-AA-A
	255/45ZR18	XL	103Y	28605811	8.5	8.0 - 9.5	27.0	10.3	771	8.6	10	29	50	1929	300-AA-A
	265/35ZR18	XL	(97Y)	28605805	9.5	9.0 - 10.5	25.3	10.8	821	9.4	10	27	50	1609	300-AA-A
	265/40ZR18	XL	(101Y)	28605821	9.5	9.0 - 10.5	26.4	10.8	790	9.1	10	29	50	1819	300-AA-A
	275/35ZR18	XL	99Y	28605808	9.5	9.0 - 11.0	25.4	11.1	811	9.8	10	29	50	1709	300-AA-A
	275/40ZR18	-	99Y	28605807	9.5	9.0 - 11.0	26.6	11.1	783	9.4	10	30	51	1709	300-AA-A
	285/35ZR18	XL	101Y	28605809	10.0	9.5 - 11.0	25.8	11.6	803	10.2	9	30	50	1819	300-AA-A
295/30ZR18	XL	98Y	28605814	10.5	10.0 - 11.0	24.9	12.0	832	10.7	9	29	50	1653	300-AA-A	
19"	215/35ZR19	XL	85Y	28605913	7.5	7.0 - 8.5	24.9	8.6	826	7.6	10	23	50	1135	300-AA-A
	225/35ZR19	XL	88Y	28605909	8.0	7.5 - 9.0	25.3	9.1	818	8.0	10	24	50	1235	300-AA-A
	225/40ZR19		89Y						COMING SOON						300-AA-A
	225/45ZR19	XL	96Y	28605937	7.5	7.0 - 8.5	27.0	9.0	769	7.8	10	27	50	1565	300-AA-A
	235/35ZR19	XL	(91Y)	28605906	8.5	8.0 - 9.5	25.5	9.5	813	8.4	10	25	50	1356	300-AA-A
	245/35ZR19	XL	(93Y)	28605908	8.5	8.0 - 9.5	25.8	9.9	803	8.7	10	27	50	1433	300-AA-A
	245/40ZR19	XL	98Y	28605911	8.5	8.0 - 9.5	26.7	10.0	776	8.4	10	28	50	1653	300-AA-A
	245/45ZR19	XL	102Y	28605904	8.0	7.5 - 9.0	27.7	9.8	753	8.3	10	28	50	1874	300-AA-A
	255/30ZR19	XL	91Y	28605990	9.0	8.5 - 9.5	25.0	10.2	823	9.2	10	26	50	1356	300-AA-A
	255/35ZR19	XL	(96Y)	28605973	9.0	8.5 - 10.0	26.0	10.4	798	9.1	10	28	50	1565	300-AA-A
	255/40ZR19	XL	100Y	28605907	9.0	8.5 - 10.0	27.0	10.5	769	8.7	10	29	50	1764	300-AA-A
	265/30ZR19	XL	(93Y)	28605905	9.5	9.0 - 10.0	25.3	10.6	816	9.6	9	28	50	1433	300-AA-A
	265/35ZR19	XL	98Y	28605938	9.5	9.0 - 10.5	26.3	10.7	788	9.4	10	30	50	1653	300-AA-A
	275/30ZR19	XL	(96Y)	28605910	9.5	9.0 - 10.0	25.6	10.8	808	9.9	9	28	50	1565	300-AA-A
	275/35ZR19	XL	(100Y)	28605902	9.5	9.0 - 11.0	26.5	11.0	778	9.8	10	30	50	1764	300-AA-A
	275/40ZR19	-	101Y	28605903	9.5	9.0 - 11.0	27.6	11.1	753	9.4	10	32	51	1819	300-AA-A
	285/30ZR19	XL	98Y	28605939	10.0	9.5 - 10.5	25.8	11.3	803	10.3	9	29	50	1653	300-AA-A
	285/35ZR19	-	(99Y)	28605912	10.0	9.5 - 11.0	26.9	11.5	771	10.2	9	32	51	1709	300-AA-A
	295/30ZR19	XL	(100Y)	28605940	10.5	10.0 - 11.0	26.0	11.8	808	10.7	9	28	50	1764	300-AA-A
	305/30ZR19	XL	(102Y)	28605941	11.0	10.5 - 11.5	26.2	12.3	790	11.1	9	32	50	1874	300-AA-A

Wheel Dia.	Size	Extra Load	Load Index/Speed Rating	Item Number	Measuring Rim Width (in)	Approved Rim Width Range (in)	Overall Diameter (in)	Section Width (in)	Revolutions Per Mile	Tread Width (in)	Tread Depth (/32")	Tire Weight (lbs.)	Max PSI (Cold)	Max Load	UTQG
20"	225/30ZR20	XL	85Y	28605007	8.0	8.0 - 8.0	25.4	9.0	811	8.1	10	23	50	1135	300-AA-A
	235/30ZR20	XL	(88Y)	28605002	8.5	8.5 - 8.5	25.6	9.6	805	8.5	10	24	50	1235	300-AA-A
	245/30ZR20	XL	(90Y)	28605008	8.5	8.0 - 9.0	25.8	9.8	798	8.9	10	26	50	1323	300-AA-A
	245/35ZR20	XL	95Y	28605014	8.5	8.0 - 9.5	26.9	9.8	774	8.7	10	27	50	1521	300-AA-A
	245/40ZR20	XL	99Y	28605003	8.5	8.0 - 9.5	27.7	9.9	749	8.4	10	29	50	1709	300-AA-A
	245/45ZR20	XL	103Y	28605023	8.0	7.5 - 9.0	28.7	9.7	725	8.3	10	31	50	1929	300-AA-A
	255/30ZR20	XL	92Y	28605011	9.0	8.5 - 9.5	26.1	10.2	790	9.2	10	28	50	1389	300-AA-A
	255/35ZR20	XL	97Y	28605004	9.0	8.5 - 10.0	27.1	10.2	767	9.1	10	29	50	1609	300-AA-A
	255/45ZR20	XL	105Y	28605006	8.5	8.0 - 9.5	29.0	10.3	717	8.6	10	32	50	2039	300-AA-A
	275/30ZR20	XL	97Y	28605001	9.5	9.0 - 10.0	26.5	10.9	778	9.9	9	29	50	1609	300-AA-A
	275/35ZR20	XL	102Y	28605005	9.5	9.0 - 11.0	27.6	11.0	751	9.8	10	31	50	1874	300-AA-A
	275/40ZR20	XL	106Y	28605947	9.5	9.0 - 11.0	28.7	11.1	725	9.4	10	33	50	2094	300-AA-A
	285/25ZR20	XL	93Y	28605012	10.5	10.5	25.6	11.6	805	10.6	9	28	50	1433	300-AA-A
285/30ZR20	XL	99Y	28605013	10.0	9.5 - 10.5	26.7	11.4	771	10.3	9	31	50	1709	300-AA-A	
22"	245/30ZR22	XL	92Y	28605202	8.5	8.0 - 9.0	27.8	9.8	740	8.9	10	28	50	1389	300-AA-A
	255/30ZR22	XL	95Y	28605203	9.0	8.5 - 9.5	28.1	10.2	734	9.2	10	30	50	1521	300-AA-A
	295/25ZR22	XL	97Y	28605009	10.5	10.0 - 11.0	27.9	11.6	736	10.9	9	33	50	1609	300-AA-A