

**TOYO TIRES®**

# PASSENGER & LIGHT TRUCK TIRES

2017 PRODUCT DATA BOOK







UNRIVALED



LT

## LIGHT TRUCK/SUV/CUV

S

## SPORTS CAR/COMPETITION

P

## PASSENGER CAR

W

## WINTER

### LIGHT TRUCK/SUV/CUV

|                     |    |
|---------------------|----|
| OPEN COUNTRY M/T    | 10 |
| OPEN COUNTRY R/T    | 14 |
| OPEN COUNTRY A/T II | 16 |
| OPEN COUNTRY H/T    | 20 |
| OPEN COUNTRY Q/T    | 24 |
| PROXES ST II        | 28 |
| PROXES S/T          | 30 |
| CELSIUS CUV         | 32 |
| OPEN COUNTRY C/T    | 34 |
| M-55                | 36 |

### SPORTS CAR/ COMPETITION

|                 |    |
|-----------------|----|
| PROXES 1        | 42 |
| PROXES R1R      | 44 |
| PROXES T1 SPORT | 46 |
| PROXES T1R      | 48 |
| PROXES 4 PLUS   | 50 |
| PROXES R888R    | 56 |
| PROXES R888     | 58 |
| PROXES RR       | 60 |
| PROXES RA1      | 62 |
| PROXES RS1      | 64 |
| PROXES TQ       | 66 |

### PASSENGER CAR

|              |    |
|--------------|----|
| VERSADO NOIR | 72 |
| VERSADO ECO  | 74 |
| EXTENSA HP   | 76 |
| EXTENSA A/S  | 78 |
| CELSIUS      | 80 |

### WINTER

|                   |    |
|-------------------|----|
| OBSERVE GSI-5     | 88 |
| OBSERVE GARIT KX  | 90 |
| OBSERVE G3-ICE    | 92 |
| OPEN COUNTRY WLT1 | 96 |

### ORIGINAL EQUIPMENT 98

|                     |     |
|---------------------|-----|
| TIRE SAFETY         | 100 |
| CONSUMER ADVISORY   |     |
| TECHNICAL BULLETINS |     |

### REFERENCE GUIDES

|               |     |
|---------------|-----|
| LIGHT TRUCK   | 106 |
| PASSENGER CAR | 109 |
| WINTER        | 113 |





# COMMITMENT



## WE'RE COMMITTED TO YOU, SO YOU CAN BE COMMITTED TO THEM.

You know you can count on Toyo Tires, with the right combination of performance, quality, and value, plus unmatched commitment to support independent tire dealers — like you. Now you've got one more reason — in fact, 545 more reasons — with Toyo Tires No Regrets® 500-Mile or 45-Day Trial Offer. The No Regrets program is simple, is powerful, and covers

almost all Toyo passenger and light truck tires. The reassurance of No Regrets makes it easier than ever to sell Toyo Tires. For your customers, it's even simpler — buy 'em, try 'em, love 'em, or bring 'em back! It's that easy. It's a great selling tool — a closer to virtually guarantee their satisfaction, and your increased sales. Driven to sell. Driven to satisfy. Driven to perform.



LIGHT TRUCK / SUV / CUV

# CONQUER



LIGHT TRUCK/SUV/CUV

| OPEN COUNTRY M/T                                                                  | OPEN COUNTRY R/T                                                                  | OPEN COUNTRY A/T II                                                                                                     | OPEN COUNTRY H/T                                                                                                       | OPEN COUNTRY Q/T                                                                               | PROXES ST II                                                                                                 | PROXES S/T                                                                                     | CELSIUS CUV                                                                                    |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
|  |  |                                       |                                     |             |                           |             |             |
| OFF-ROAD<br>MAXIMUM TRACTION                                                      | ON-/OFF-ROAD<br>RUGGED TERRAIN                                                    | ON-/OFF-ROAD<br>ALL-TERRAIN                                                                                             | HIGHWAY<br>ALL-SEASON                                                                                                  | CUV/SUV TOURING<br>ALL-SEASON TIRE                                                             | STREET/SPORT TRUCK<br>ALL-SEASON                                                                             | STREET/SPORT TRUCK<br>ALL-SEASON                                                               | VARIABLE-CONDITIONS                                                                            |
| DRY HANDLING 3.5                                                                  | DRY HANDLING 4.0                                                                  | DRY HANDLING 4.0                                                                                                        | DRY HANDLING 4.0                                                                                                       | DRY HANDLING 5.0                                                                               | DRY HANDLING 5.0                                                                                             | DRY HANDLING 4.5                                                                               | DRY HANDLING 4.5                                                                               |
| WET HANDLING 3.5                                                                  | WET HANDLING 4.0                                                                  | WET HANDLING 3.5                                                                                                        | WET HANDLING 3.5                                                                                                       | WET HANDLING 5.0                                                                               | WET HANDLING 4.5                                                                                             | WET HANDLING 4.0                                                                               | WET HANDLING 4.5                                                                               |
| RIDE COMFORT 3.0                                                                  | RIDE COMFORT 3.5                                                                  | RIDE COMFORT 3.5                                                                                                        | RIDE COMFORT 4.5                                                                                                       | RIDE COMFORT 4.5                                                                               | RIDE COMFORT 3.5                                                                                             | RIDE COMFORT 3.5                                                                               | RIDE COMFORT 5.0                                                                               |
| QUIET RIDE 3.0                                                                    | QUIET RIDE 3.5                                                                    | QUIET RIDE 4.0                                                                                                          | QUIET RIDE 4.5                                                                                                         | QUIET RIDE 5.0                                                                                 | QUIET RIDE 4.5                                                                                               | QUIET RIDE 4.0                                                                                 | QUIET RIDE 4.5                                                                                 |
| TREAD LIFE 3.5                                                                    | TREAD LIFE 4.0                                                                    | TREAD LIFE 5.0                                                                                                          | TREAD LIFE 4.5                                                                                                         | TREAD LIFE 4.0                                                                                 | TREAD LIFE 3.0                                                                                               | TREAD LIFE 3.0                                                                                 | TREAD LIFE 4.5                                                                                 |
| OFF-ROAD TRACTION 5.0                                                             | OFF-ROAD TRACTION 4.5                                                             | OFF-ROAD TRACTION 4.0                                                                                                   | OFF-ROAD TRACTION 2.5                                                                                                  | OFF-ROAD TRACTION 2.5                                                                          | OFF-ROAD TRACTION 2.0                                                                                        | OFF-ROAD TRACTION 1.5                                                                          | OFF-ROAD TRACTION 2.0                                                                          |
| WINTER HANDLING 3.5                                                               | WINTER HANDLING 4.0                                                               | WINTER HANDLING 4.5                                                                                                     | WINTER HANDLING 4.0                                                                                                    | WINTER HANDLING 4.0                                                                            | WINTER HANDLING 3.0                                                                                          | WINTER HANDLING 2.5                                                                            | WINTER HANDLING 5.0                                                                            |
| ROLLING RESISTANCE 2.0                                                            | ROLLING RESISTANCE 2.0                                                            | ROLLING RESISTANCE 3.0                                                                                                  | ROLLING RESISTANCE 4.0                                                                                                 | ROLLING RESISTANCE 4.0                                                                         | ROLLING RESISTANCE 3.0                                                                                       | ROLLING RESISTANCE 3.0                                                                         | ROLLING RESISTANCE 4.5                                                                         |
| <b>UTQG</b><br>--                                                                 | <b>UTQG</b><br>--                                                                 | <b>UTQG</b><br>S/T-Rated: 600 A B<br>H-Rated: 600 A A<br>LT Sizes: N/A                                                  | <b>UTQG</b><br>S/T-Rated: 640 A B<br>H/V-Rated: 640 A A<br>235/55R18 100V: 600 A A<br>LT Sizes: N/A                    | <b>UTQG</b><br>H/V-Rated: 680 A A<br>S/T-Rated: 680 A B                                        | <b>UTQG</b><br>V/W-Rated: 420 A A<br>Y-Rated: 280 A A<br>LT Sizes: N/A                                       | <b>UTQG</b><br>420 A A                                                                         | <b>UTQG</b><br>H/V-Rated: 500 A A, 520 A A                                                     |
| <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Full-Size Pickups<br>Plus Sizing      | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Full-Size Pickups<br>Plus Sizing      | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Full-Size SUVs<br>Full-Size Pickups<br>Direct OE Replacement<br>Plus Sizing | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Crossovers<br>Full-Size SUVs<br>Full-Size Pickups<br>Direct OE Replacement | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Crossovers<br>Luxury SUVs<br>Direct OE Replacement | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Crossovers<br>Full-Size SUVs<br>Full-Size Pickups<br>Plus Sizing | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Full-Size SUVs<br>Full-Size Pickups<br>Plus Sizing | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Crossovers<br>Luxury SUVs<br>Direct OE Replacement |
| <b>SPEED RATING</b><br>P-Q                                                        | <b>SPEED RATING</b><br>Q                                                          | <b>SPEED RATING</b><br>Q-R-S-T-H                                                                                        | <b>SPEED RATING</b><br>S-T-H-V                                                                                         | <b>SPEED RATING</b><br>S-T-H-V                                                                 | <b>SPEED RATING</b><br>H-V-W-Y                                                                               | <b>SPEED RATING</b><br>V-W                                                                     | <b>SPEED RATING</b><br>M-N                                                                     |
| <b>WHEEL DIAMETER</b><br>15"-16"-17"-18"-20"-22"-24"                              | <b>WHEEL DIAMETER</b><br>16"-17"-18"-20"-22"                                      | <b>WHEEL DIAMETER</b><br>15"-16"-17"-18"-19"-20"-22"                                                                    | <b>WHEEL DIAMETER</b><br>15"-16"-17"-18"-19"-20"-22"                                                                   | <b>WHEEL DIAMETER</b><br>16"-17"-18"-19"-20"-22"                                               | <b>WHEEL DIAMETER</b><br>16"-17"-18"-19"-20"-22"-23"-24"                                                     | <b>WHEEL DIAMETER</b><br>20"-22"-24"                                                           | <b>WHEEL DIAMETER</b><br>17"-18"-19"-20"                                                       |





LT

LIGHT TRUCK / SUV / CUV



## OFF-ROAD MAXIMUM TRACTION TIRE

The Open Country M/T is legendary for durability, off-road performance, long tread life, and an aggressive tread pattern. It's designed to help trucks work hard on pavement, then work just as hard when roads are muddy, snowy, and rocky—or when there are no roads at all.

### POPULAR FITMENTS

Chevrolet Trucks  
Ford F-Series  
Jeep  
Nissan Trucks  
Ram Series  
Toyota Trucks

### HIGH TURN-UP, 3-PLY POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.



# OPEN COUNTRY M/T

LT

LIGHT TRUCK / SUV / CUV

### AGGRESSIVE TREAD DESIGN WITH HOOK-SHAPED BLOCKS

- Delivers excellent off-road traction, while maintaining great on-road performance.

### OPEN, SCALLOPED SHOULDER BLOCKS

- Improves off-road traction.
- Enhances grip in muddy, sandy, or snowy off-road conditions.
- Ejects mud and snow through the open channels.

### OVER-THE-SHOULDER TREAD

- Helps to provide traction in deep mud and snow.
- Delivers improved off-road handling in hard turns.

### DEEP SIPING IN THE TREAD BLOCKS

- Helps maintain grip on wet surfaces.





LT

LIGHT TRUCK / SUV / CUV

|    | WHEEL DIA. | TIRE SIZE                      | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|--------------------------------|------------|---------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 15 |            | 31X10.50R15LT                  | 109Q       | C       | BSW      | 360490       | 7.0-( <b>8.5</b> )-9.0            | 55           | 19.1                | 31.1                | 10.7                 | 2270                     | -                      | 50                 | 667           |
|    |            | 33X10.50R15LT                  | 114P       | C       | BSW      | 360470       | 7.0-( <b>8.5</b> )-9.0            | 57           | 19.1                | 32.8                | 10.9                 | 2600                     | -                      | 50                 | 632           |
|    |            | 33x12.50R15LT                  | 108P       | C       | BSW      | 360100       | 8.0-( <b>10.0</b> )-11.0          | 69           | 21.0                | 33.0                | 12.8                 | 2205                     | -                      | 35                 | 628           |
|    |            | 33X13.50R15LT                  | 109Q       | C       | BSW      | 360290       | 8.5-( <b>11.0</b> )               | 75           | 21.0                | 33.1                | 13.9                 | 2270                     | -                      | 35                 | 628           |
|    |            | 35X13.50R15LT                  | 114Q       | C       | BSW      | 361000       | 8.5-( <b>11.0</b> )               | 79           | 21.0                | 34.8                | 14.4                 | 2600                     | -                      | 35                 | 596           |
|    |            | 37X14.50R15LT                  | 120Q       | C       | BSW      | 360260       | 10.0-( <b>12.0</b> )              | 94           | 21.0                | 36.7                | 15.6                 | 3080                     | -                      | 35                 | 566           |
| 16 |            | LT235/85R16                    | 120/116P   | E       | BSW      | 360440       | 6.0-( <b>6.5</b> )-7.5            | 52           | 18.4                | 32.0                | 9.4                  | 3042                     | 2778                   | 80                 | 648           |
|    |            | LT245/75R16                    | 120/116P   | E       | BSW      | 360450       | 6.5-( <b>7.0</b> )-8.0            | 52           | 18.4                | 30.7                | 9.9                  | 3042                     | 2778                   | 80                 | 674           |
|    |            | LT255/85R16<br>(33X10.00R16)   | 123/120P   | E       | BSW      | 360460       | 6.5-( <b>7.0</b> )-8.0            | 60           | 18.9                | 33.5                | 10.2                 | 3415                     | 3085                   | 80                 | 619           |
|    |            | LT265/75R16                    | 123P       | E       | BSW      | 360320       | 7.0-( <b>7.5</b> )-8.0            | 59           | 18.9                | 31.8                | 10.8                 | 3415                     | -                      | 80                 | 651           |
|    |            | LT285/75R16<br>(33X11.50R16)   | 126P       | E       | BSW      | 360280       | 7.5-( <b>8.0</b> )-9.0            | 68           | 19.1                | 33.0                | 11.6                 | 3740                     | -                      | 80                 | 628           |
|    |            | LT305/70R16<br>(33.0X12.00R16) | 124P       | E       | BSW      | 360110       | 8.0-( <b>9.0</b> )-9.5            | 72           | 20.0                | 33.0                | 12.2                 | 3525                     | -                      | 65                 | 628           |
| 17 |            | LT315/75R16<br>(35X12.50R16)   | 127Q       | E       | BSW      | 360230       | 8.0-( <b>8.5</b> )-10.0           | 76           | 21.0                | 34.9                | 12.9                 | 3860                     | -                      | 65                 | 595           |
|    |            | LT385/70R16<br>(38X14.50R16)   | 130Q       | D       | BSW      | 360480       | 10.0-( <b>11.0</b> )-12.0         | 97           | 21.0                | 37.7                | 15.6                 | 4190                     | -                      | 50                 | 550           |
|    |            | LT255/75R17                    | 111/108Q   | C       | BSW      | 360790       | 6.5-( <b>7.0</b> )-8.5            | 57           | 18.3                | 32.3                | 10.0                 | 2405                     | 2205                   | 50                 | 643           |
|    |            | LT265/70R17                    | 121P       | E       | BSW      | 360130       | 7.0-( <b>8.0</b> )-8.5            | 63           | 18.9                | 32.0                | 10.8                 | 3195                     | -                      | 80                 | 648           |
|    |            | LT285/70R17                    | 121/118P   | E       | BSW      | 360650       | 7.5-( <b>8.5</b> )-9.0            | 66           | 18.9                | 33.0                | 11.5                 | 3195                     | 2910                   | 80                 | 630           |
|    |            | LT285/75R17<br>(34X11.50R17)   | 121P       | E       | BSW      | 360430       | 7.5-( <b>8.0</b> )-9.5            | 71           | 19.1                | 34.1                | 11.6                 | 3195                     | -                      | 80                 | 608           |
| 18 |            | LT295/70R17<br>(33X11.50R17)   | 128P       | E       | BSW      | 360360       | 7.5-( <b>8.5</b> )-10.0           | 73           | 19.4                | 33.5                | 12.0                 | 3970                     | -                      | 80                 | 619           |
|    |            | LT315/70R17                    | 121/118Q   | E       | BSW      | 360780       | 8.0-( <b>9.5</b> )-11.0           | 77           | 20.2                | 34.6                | 12.7                 | 3195                     | 2910                   | 65                 | 600           |
|    |            | 33X12.50R17LT                  | 120Q       | E       | BSW      | 360760       | 8.5-( <b>10.0</b> )-11.0          | 74           | 21.0                | 32.8                | 12.5                 | 3085                     | -                      | 65                 | 634           |
|    |            | 35X12.50R17LT                  | 125Q       | E       | BSW      | 360310       | 8.5-( <b>10.0</b> )-11.0          | 83           | 21.0                | 34.8                | 13.2                 | 3640                     | -                      | 65                 | 596           |
|    |            | 37X12.50R17LT                  | 124Q       | D       | BSW      | 360770       | 8.5-( <b>10.0</b> )-11.0          | 83           | 21.0                | 36.8                | 12.5                 | 3525                     | -                      | 50                 | 565           |
|    |            | 37X13.50R17LT                  | 131Q       | E       | BSW      | 360270       | 8.5-( <b>11.0</b> )               | 93           | 21.0                | 37.0                | 14.6                 | 4300                     | -                      | 65                 | 560           |
| 18 |            | 40X13.50R17LT                  | 121Q       | C       | BSW      | 361010       | 8.5-( <b>11.0</b> )               | 106          | 21.0                | 39.7                | 14.4                 | 3195                     | -                      | 35                 | 522           |
|    |            | LT275/65R18                    | 123/120P   | E       | BSW      | 360620       | 7.5-( <b>8.0</b> )-9.0            | 65           | 18.9                | 32.3                | 11.0                 | 3415                     | 3085                   | 80                 | 643           |
|    |            | LT275/70R18<br>(33X11.00R18)   | 125P       | E       | BSW      | 360120       | 7.0-( <b>8.0</b> )-8.5            | 66           | 19.1                | 33.6                | 11.0                 | 3640                     | -                      | 80                 | 617           |
|    |            | LT285/70R18<br>(34X11.50R18)   | 127/124Q   | E       | BSW      | 360590       | 7.5-( <b>8.5</b> )-9.5            | 70           | 18.9                | 34.1                | 11.4                 | 3860                     | 3525                   | 80                 | 609           |
|    |            | LT285/75R18<br>(35X11.5R18)    | 129P       | E       | BSW      | 360420       | 7.5-( <b>8.0</b> )-9.5            | 71           | 19.1                | 35.1                | 11.6                 | 4080                     | -                      | 80                 | 591           |
|    |            | LT295/70R18<br>129/126P E/10   | 129/126P   | E       | BSW      | 360640       | 7.5-( <b>8.5</b> )-10.0           | 73           | 19.4                | 34.5                | 11.8                 | 4080                     | 3750                   | 80                 | 602           |
| 18 |            | LT315/70R18<br>(36X13.00R18)   | 127/124Q   | E       | BSW      | 360560       | 8.0-( <b>9.5</b> )-11.0           | 82           | 20.7                | 35.7                | 13.0                 | 3860                     | 3525                   | 65                 | 581           |
|    |            | 33X12.50R18LT                  | 118Q       | E       | BSW      | 360340       | 8.5-( <b>10.0</b> )-11.0          | 75           | 21.0                | 33.0                | 12.7                 | 2910                     | -                      | 65                 | 630           |
|    |            | 33X12.50R18LT                  | 122Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
|    |            | 35X12.50R18LT                  | 123Q       | E       | BSW      | 360090       | 8.5-( <b>10.0</b> )-11.0          | 81           | 21.0                | 35.0                | 13.2                 | 3415                     | -                      | 65                 | 593           |
|    |            | 35X12.50R18LT                  | 128Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
|    |            | 37X13.50R18LT                  | 124Q       | D       | BSW      | 360300       | 8.5-( <b>11.0</b> )               | 93           | 21.0                | 37.0                | 14.2                 | 3525                     | -                      | 50                 | 560           |
| 18 |            | 38x13.50R18LT                  | 126Q       | D       | BSW      | 360380       | 8.5-( <b>11.0</b> )               | 97           | 21.0                | 37.7                | 14.3                 | 3750                     | -                      | 50                 | 550           |
|    |            | 38X15.50R18LT                  | 128Q       | D       | BSW      | 360180       | 11.0-( <b>12.0</b> )-13.0         | 106          | 21.0                | 37.7                | 15.9                 | 3970                     | -                      | 50                 | 550           |

LT

LIGHT TRUCK / SUV / CUV

|    | WHEEL DIA. | TIRE SIZE                    | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|------------------------------|------------|---------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
|    |            | LT275/55R20                  | 115/112P   | D       | BSW      | 360670       | 7.5-( <b>8.5</b> )-9.5            | 68           | 19.1                | 32.1                | 11.2                 | 2680                     | 2470                   | 65                 | 647           |
|    |            | LT275/65R20<br>(34X11.00R20) | 126P       | E       | BSW      | 360410       | 7.5-( <b>8.0</b> )-9.5            | 71           | 19.1                | 34.5                | 11.0                 | 3750                     | -                      | 80                 | 601           |
|    |            | LT295/55R20                  | 123/120P   | E       | BSW      | 360610       | 8.0-( <b>9.5</b> )-10.0           | 72           | 19.4                | 33.0                | 12.2                 | 3415                     | 3085                   | 80                 | 630           |
|    |            | LT295/60R20                  | 126/123P   | E       | BSW      | 360660       | 8.0-( <b>8.5</b> )-10.0           | 80           | 19.4                | 34.2                | 11.8                 | 3750                     | 3415                   | 80                 | 608           |
|    |            | LT295/65R20                  | 129/126P   | E       | BSW      | 360630       | 8.0-( <b>8.5</b> )-10.0           | 75           | 19.4                | 35.4                | 11.8                 | 4080                     | 3750                   | 80                 | 588           |
|    |            | LT315/60R20<br>(35X12.50R20) | 125Q       | E       | BSW      | 360510       | 8.5-( <b>9.5</b> )-11.0           | 78           | 20.7                | 35.0                | 12.6                 | 3640                     | 3305                   | 65                 | 593           |
| 20 |            | 33X12.50R20LT                | 119Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
|    |            | 33X12.50R20LT                | 114Q       | E       | BSW      | 360330       | 8.5-( <b>10.0</b> )-11.0          | 72           | 21.0                | 33.0                | 12.6                 | 2600                     | -                      | 65                 | 630           |
|    |            | 35X12.50R20LT                | 121Q       | E       | BSW      | 360240       | 8.5-( <b>10.0</b> )-11.0          | 81           | 21.0                | 35.0                | 13.0                 | 3195                     | -                      | 65                 | 592           |
|    |            | 35X12.50R20LT                | 125Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
|    |            | 37X12.50R20LT                | 126Q       | E       | BSW      | 360750       | 8.5-( <b>10.0</b> )-11.0          | 85           | 21.0                | 36.8                | 12.5                 | 3750                     | -                      | 65                 | 565           |
|    |            | 37X13.50R20LT                | 127Q       | E       | BSW      | 360220       | 8.5-( <b>11.0</b> )               | 94           | 21.0                | 37.0                | 14.0                 | 3860                     | -                      | 65                 | 560           |
| 22 |            | 38X13.50R20LT                | 124Q       | D       | BSW      | 360390       | 8.5-( <b>11.0</b> )               | 100          | 21.0                | 37.7                | 14.3                 | 3525                     | -                      | 50                 | 550           |
|    |            | 38X15.50R20LT                | 125Q       | D       | BSW      | 360190       | 11.0-( <b>12.0</b> )-13.0         | 101          | 21.0                | 37.7                | 15.9                 | 3640                     | -                      | 50                 | 550           |
|    |            | 40X15.50R20LT                | 130Q       | D       | BSW      | 360370       | 11.0-( <b>12.0</b> )-13.0         | 112          | 21.0                | 39.7                | 15.9                 | 4190                     | -                      | 50                 | 522           |
|    |            | 33X12.50R22LT                | 109Q       | E       | BSW      | 360520       | 8.5-( <b>10.0</b> )-11.0          | 71           | 18.9                | 33.0                | 12.4                 | 2270                     | -                      | 65                 | 629           |
|    |            | 33X12.50R22LT                | 114Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
|    |            | 35X12.50R22LT                | 121Q       | F       | BSW      |              |                                   |              |                     |                     |                      | COMING SOON              |                        |                    |               |
| 24 |            | 35X12.50R22LT                | 117Q       | E       | BSW      | 360540       | 8.5-( <b>10.0</b> )-11.0          | 81           | 21.0                | 35.0                | 12.8                 | 2835                     | -                      | 65                 | 593           |
|    |            | 37X13.50R22LT                | 123Q       | E       | BSW      | 360210       | 8.5-( <b>11.0</b> )               | 90           | 21.0                | 37.0                | 14.0                 | 3420                     | -                      | 65                 | 560           |
|    |            | 40X15.50R22LT                | 127Q       | D       | BSW      | 360200       | 11.0-( <b>12.0</b> )-13.0         | 110          | 21.0                | 39.7                | 15.9                 | 3860                     | -                      | 50                 | 522           |
|    |            | 37X13.50R24LT                | 120Q       | E       | BSW      | 360350       | 8.5-( <b>11.0</b> )               | 89           | 21.0                | 37.0                | 13.6                 | 3085                     | -                      | 65                 | 561           |
|    |            | 40X15.50R24LT                | 128P       | E       | BSW      | 360680       | 11.0-( <b>12.0</b> )-14.0         | 107          | 21.0                | 39.8                | 15.4                 | 3970                     | -                      | 65                 | 522           |





ON-/OFF-ROAD RUGGED TERRAIN TIRE

Off-road performance meets on-road comfort with the Open Country R/T. Built rugged for any terrain, this tire offers excellent off-road traction, durable construction, and aggressive styling. Its ability to tackle dirt, sand, and rocks is inspired by the legendary Open Country M/T, while its quieter ride is a nod to our best-selling Open Country A/T II.

POPULAR FITMENTS

- Chevrolet Trucks
- Ford F-Series
- Jeep
- Nissan Trucks
- Ram Series
- Toyota Trucks

HIGH TURN-UP, 3-PLY POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.

OPTIMIZED PATTERN ARRANGEMENT

- Reduces noise for improved driving comfort.

AGGRESSIVE SIDEWALL DESIGNS WITH DURABLE SIDEWALL COMPOUND

- Enhances traction and side impact protection.
- Offers customization with a distinct look on each side of the tire.

OPEN, SCALLOPED SHOULDER BLOCKS

- Improves off-road traction.
- Enhances grip in muddy, sandy, or snowy off-road conditions.
- Ejects mud and snow through the open channels.

STONE AND MUD EJECTORS

- Forces stones and mud from grooves.



| WHEEL DIA. | TIRE SIZE     | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.) | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX LOAD (LBS) DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|---------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|--------------------|----------------------|-----------------------|---------------------|--------------------|---------------|
| 15         | 31X10.50R15LT | 109Q       | C       | BSW      | 351360       | 7.0-(8.5)-9.0                  | 57           | 18.9                | 30.5               | 10.6                 | 2270                  | -                   | 50                 | 681           |
| 16         | LT265/75R16   | 123/120Q   | E       | BSW      | 350720       | 7.0-(7.5)-8.0                  | 53           | 16.4                | 31.9               | 10.5                 | 3415                  | 3085                | 80                 | 651           |
|            | LT285/70R17   | 121/118Q   | E       | BSW      | 350160       | 7.5-(8.5)-9.0                  | 60           | 16.4                | 33.0               | 11.5                 | 3195                  | 2910                | 80                 | 630           |
|            | LT295/70R17   | 121/118Q   | E       | BSW      | 351210       | 7.5-(8.5)-10.0                 | 64           | 16.4                | 33.3               | 11.8                 | 3195                  | 2910                | 80                 | 624           |
| 17         | 35X12.50R17LT | 121Q       | E       | BSW      | 350210       | 8.5-(10.0)-11.0                | 74           | 18.9                | 34.8               | 12.5                 | 3195                  | -                   | 65                 | 598           |
|            | 37X12.50R17LT | 124Q       | D       | BSW      | 350700       | 8.5-(10.0)-11.0                | 78           | 18.9                | 36.8               | 12.5                 | 3525                  | -                   | 50                 | 565           |
|            | 37X13.50R17LT | 121Q       | D       | BSW      | 350670       | 8.5-(11.0)                     | 84           | 18.9                | 36.8               | 13.6                 | 3195                  | -                   | 50                 | 565           |
|            | LT275/70R18   | 125/122Q   | E       | BSW      | 351220       | 7.0-(8.0)-8.5                  | 61           | 16.4                | 33.2               | 11.0                 | 3640                  | 3305                | 80                 | 626           |
|            | LT285/60R18   | 122/119Q   | E       | BSW      | 351280       | 8.0-(8.5)-10.0                 | 58           | 16.4                | 31.5               | 11.5                 | 3305                  | 3000                | 80                 | 660           |
|            | LT285/65R18   | 125/122Q   | E       | BSW      | 350260       | 8.0-(8.5)-10.0                 | 59           | 16.4                | 32.8               | 11.5                 | 3640                  | 3305                | 80                 | 633           |
| 18         | LT285/75R18   | 129/126Q   | E       | BSW      | 351250       | 7.5-(8.0)-9.5                  | 66           | 16.4                | 34.8               | 11.3                 | 4080                  | 3750                | 80                 | 596           |
|            | 33X12.50R18LT | 118Q       | E       | BSW      | 350220       | 8.5-(10.0)-11.0                | 65           | 18.9                | 32.8               | 12.5                 | 2910                  | -                   | 65                 | 634           |
|            | 35X12.50R18LT | 123Q       | E       | BSW      | 350170       | 8.5-(10.0)-11.0                | 77           | 18.9                | 34.8               | 12.5                 | 3415                  | -                   | 65                 | 598           |
|            | 37X13.50R18LT | 124Q       | D       | BSW      | 351270       | 8.5-(11.0)                     | 85           | 18.9                | 36.8               | 13.6                 | 3525                  | -                   | 50                 | 565           |
|            | LT275/65R20   | 126/123Q   | E       | BSW      | 351200       | 7.5-(8.0)-9.5                  | 60           | 16.4                | 34.1               | 11.0                 | 3750                  | 3415                | 80                 | 609           |
|            | LT285/55R20   | 122/119Q   | E       | BSW      | 351240       | 8.0-(9.0)-10.0                 | 60           | 16.4                | 32.4               | 11.7                 | 3305                  | 3000                | 80                 | 642           |
|            | LT305/55R20   | 121/118Q   | E       | BSW      | 351230       | 8.5-(9.5)-11.0                 | 68           | 16.4                | 33.2               | 12.4                 | 3195                  | 2919                | 65                 | 625           |
|            | LT305/55R20   | 125Q       | F       | BSW      |              |                                |              |                     |                    |                      | COMING SOON           |                     |                    |               |
| 20         | 33X12.50R20LT | 114Q       | E       | BSW      | 350180       | 8.5-(10.0)-11.0                | 69           | 18.9                | 32.8               | 12.5                 | 2600                  | -                   | 65                 | 634           |
|            | 35X12.50R20LT | 121Q       | E       | BSW      | 350190       | 8.5-(10.0)-11.0                | 75           | 18.9                | 34.8               | 12.5                 | 3195                  | -                   | 65                 | 598           |
|            | 35X12.50R20LT | 125Q       | F       | BSW      |              |                                |              |                     |                    |                      | COMING SOON           |                     |                    |               |
|            | 35X13.50R20LT | 121Q       | E       | BSW      | 350690       | 9.5-(11.0)-12.0                | 76           | 18.9                | 34.8               | 13.6                 | 3195                  | -                   | 65                 | 598           |
|            | 37X12.50R20LT | 126Q       | E       | BSW      | 350230       | 8.5-(10.0)-11.0                | 81           | 18.9                | 36.8               | 12.5                 | 3750                  | -                   | 65                 | 565           |
|            | 37X13.50R20LT | 127Q       | E       | BSW      | 350680       | 8.5-(11.0)                     | 82           | 18.9                | 36.8               | 13.6                 | 3860                  | -                   | 65                 | 565           |
|            | 35X12.50R22LT | 117Q       | E       | BSW      | 350710       | 8.5-(10.0)-11.0                | 67           | 18.9                | 34.8               | 12.5                 | 2835                  | -                   | 65                 | 598           |
| 22         | 37X12.50R22LT | 123Q       | E       | BSW      | 350730       | 9.0-(10.0)-11.5                | 77           | 18.9                | 36.8               | 12.5                 | 3415                  | -                   | 65                 | 565           |
|            | 37X13.50R22LT | 123Q       | E       | BSW      | 351260       | 8.5-(11.0)                     | 82           | 18.9                | 36.8               | 13.6                 | 3415                  | -                   | 65                 | 565           |



Speed rated "Q" = 99mph. "D" = 8-ply rating, "E" = 10-ply rating, "F" = 12-ply rating. "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



LT

LIGHT TRUCK / SUV / CUV



## ON-/OFF-ROAD ALL-TERRAIN TIRE

This versatile all-terrain tire offers excellent traction and tread life along with a blatantly aggressive tread design and quiet ride.

Xtreme sizes feature a deeper tread depth, and a more aggressive tread and shoulder design. See size specifications for a list of sizes, designated by "XT" under Construction.

### POPULAR FITMENTS

Chevrolet Trucks  
Ram Series  
Ford F-Series  
Jeep Wrangler  
Toyota Tundra

### UTQG

P-Metric/Metric  
S/T-Rated: 600 A B  
H-Rated: 600 A A

### AGGRESSIVE SIDEWALL AND OPEN TREAD BLOCK DESIGN

- Delivers tough looks and even tougher performance in dirt, mud, or snow, while maintaining a quiet ride.



# OPEN COUNTRY A/T II

LT

LIGHT TRUCK / SUV / CUV

### WEAR-RESISTANT TREAD COMPOUND

- Extends tread life and durability.

### DEEP TREAD GROOVES WITH STONE-EJECTING BLOCKS

- Enhances mud and snow traction.
- Forces stones from grooves.

### TIE BARS BETWEEN BLOCKS

- Stabilizes tread blocks.
- Improves dry braking.
- Reduces irregular wear.

### POLYGONAL BLOCKS AND ZIGZAG SIPES

- Contributes to excellent snow performance.





LT

LIGHT TRUCK / SUV / CUV

| WHEEL DIA. | TIRE SIZE     | LOAD/SPEED | LOAD ID | CONSTRUCTION | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|---------------|------------|---------|--------------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 15         | P215/75R15    | 100S       | SL      | -            | OWL      | 352380       | 5.5- <b>(6.0)</b> -7.0            | 25.6         | 12.5                | 27.7                | 8.5                  | 1742                     | -                      | 44                 | 751           |
|            | P225/75R15    | 102S       | SL      | -            | OWL      | 352370       | <b>(6.0)</b> -7.5                 | 27.8         | 12.6                | 28.3                | 8.8                  | 1874                     | -                      | 44                 | 734           |
|            | P235/75R15    | 108S       | XL      | -            | OWL      | 352400       | 6.0- <b>(6.5)</b> -8.0            | 34.2         | 12.7                | 28.9                | 9.3                  | 2183                     | -                      | 50                 | 720           |
|            | LT235/75R15   | 104/101S   | C       | -            | OWL      | 352680       | 6.0- <b>(6.5)</b> -7.0            | 34.4         | 15.6                | 28.9                | 9.3                  | 1985                     | 1820                   | 50                 | 720           |
|            | P265/75R15    | 112S       | SL      | -            | OWL      | 352390       | 7.0- <b>(7.5)</b> -9.0            | 39           | 13.1                | 30.7                | 10.5                 | 2469                     | -                      | 44                 | 677           |
|            | 30X9.50R15LT  | 104S       | C       | -            | OWL      | 352690       | 6.5- <b>(7.5)</b> -8.5            | 36.6         | 15.6                | 29.5                | 9.4                  | 1985                     | -                      | 50                 | 704           |
|            | 31X10.50R15LT | 109S       | C       | -            | OWL      | 352700       | 7.0- <b>(8.5)</b> -9.0            | 40.2         | 16                  | 30.5                | 10.6                 | 2270                     | -                      | 50                 | 681           |
| 16         | P215/70R16    | 99S        | SL      | -            | BSW      | 352330       | 5.5- <b>(6.5)</b> -7.0            | 26.9         | 12.5                | 27.9                | 8.7                  | 1709                     | -                      | 44                 | 745           |
|            | LT215/85R16   | 115/112Q   | E       | -            | BSW      | 352670       | 5.5- <b>(6.0)</b> -7.0            | 40.6         | 15.4                | 30.4                | 8.5                  | 2680                     | 2470                   | 80                 | 683           |
|            | P225/70R16    | 101T       | SL      | -            | BSW      | 352340       | 6.0- <b>(6.5)</b> -7.5            | 28.4         | 12.6                | 28.4                | 9                    | 1819                     | -                      | 44                 | 731           |
|            | P225/70R16    | 101T       | SL      | -            | OWL      | 352350       | 6.0- <b>(6.5)</b> -7.5            | 28.7         | 12.6                | 28.4                | 9                    | 1819                     | -                      | 44                 | 731           |
|            | P225/75R16    | 104S       | SL      | -            | BSW      | 352360       | <b>(6.0)</b> -7.5                 | 30.6         | 12.6                | 29.3                | 8.8                  | 1984                     | -                      | 44                 | 709           |
|            | LT225/75R16   | 115/112Q   | E       | -            | BSW      | 352650       | <b>(6.0)</b> -7.0                 | 38.4         | 15.5                | 29.3                | 8.8                  | 2680                     | 2470                   | 80                 | 709           |
|            | P235/70R16    | 104T       | SL      | -            | BSW      | 352270       | 6.0- <b>(7.0)</b> -8.0            | 30.6         | 12.8                | 29                  | 9.4                  | 1984                     | -                      | 44                 | 717           |
|            | P235/70R16    | 104T       | SL      | -            | OWL      | 352280       | 6.0- <b>(7.0)</b> -8.0            | 29.1         | 12.7                | 29                  | 9.4                  | 1984                     | -                      | 44                 | 717           |
|            | LT235/85R16   | 120/116R   | E       | -            | BSW      | 352660       | 6.0- <b>(6.5)</b> -7.5            | 43           | 15.6                | 31.7                | 9.3                  | 3042                     | 2778                   | 80                 | 655           |
|            | P245/70R16    | 106S       | SL      | -            | OWL      | 352110       | 6.5- <b>(7.0)</b> -8.0            | 34.4         | 12.9                | 29.5                | 9.8                  | 2094                     | -                      | 44                 | 704           |
|            | P245/70R16    | 106S       | SL      | -            | BSW      | 352100       | 6.5- <b>(7.0)</b> -8.0            | 36.4         | 12.9                | 29.5                | 9.8                  | 2094                     | -                      | 44                 | 704           |
|            | P245/75R16    | 109S       | SL      | -            | BSW      | 352120       | 6.5- <b>(7.0)</b> -8.0            | 34.4         | 12.9                | 30.5                | 9.8                  | 2271                     | -                      | 44                 | 682           |
|            | P245/75R16    | 109S       | SL      | -            | OWL      | 352130       | 6.5- <b>(7.0)</b> -8.0            | 34.4         | 12.9                | 30.5                | 9.8                  | 2271                     | -                      | 44                 | 682           |
|            | LT245/75R16   | 108/104S   | C       | -            | OWL      | 352560       | 6.5- <b>(7.0)</b> -8.0            | 43.4         | 15.7                | 30.5                | 9.8                  | 2205                     | 2006                   | 50                 | 682           |
|            | LT245/75R16   | 120/116S   | E       | -            | BSW      | 352530       | 6.5- <b>(7.0)</b> -8.0            | 45           | 15.7                | 30.5                | 9.8                  | 3042                     | 2778                   | 80                 | 682           |
|            | LT245/75R16   | 120/116S   | E       | -            | OWL      | 352540       | 6.5- <b>(7.0)</b> -8.0            | 43.7         | 15.7                | 30.5                | 9.8                  | 3042                     | 2778                   | 80                 | 682           |
|            | LT245/75R16   | 108/104S   | C       | -            | BSW      | 352550       | 6.5- <b>(7.0)</b> -8.0            | 45           | 15.7                | 30.5                | 9.8                  | 2205                     | 2006                   | 50                 | 682           |
|            | 255/65R16     | 109H       | SL      | -            | BSW      | 352140       | 7.0- <b>(7.5)</b> -9.0            | 37.6         | 12.7                | 29.1                | 10.2                 | 2271                     | -                      | 51                 | 715           |
|            | P255/70R16    | 109S       | SL      | -            | BSW      | 352310       | 6.5- <b>(7.5)</b> -8.5            | 37.7         | 13                  | 30.1                | 10.2                 | 2271                     | -                      | 44                 | 691           |
|            | P255/70R16    | 109S       | SL      | -            | OWL      | 352320       | 6.5- <b>(7.5)</b> -8.5            | 37.7         | 13                  | 30.1                | 10.2                 | 2271                     | -                      | 44                 | 691           |
|            | P265/70R16    | 111T       | SL      | -            | OWL      | 352090       | 7.0- <b>(8.0)</b> -9.0            | 39.6         | 13.1                | 30.6                | 10.7                 | 2403                     | -                      | 44                 | 678           |
|            | P265/70R16    | 111T       | SL      | -            | BSW      | 352080       | 7.0- <b>(8.0)</b> -9.0            | 39.7         | 13.1                | 30.6                | 10.8                 | 2403                     | -                      | 44                 | 679           |
|            | P265/75R16    | 114T       | SL      | -            | BSW      | 352290       | 7.0- <b>(7.5)</b> -9.0            | 41.2         | 13.1                | 31.7                | 10.5                 | 2601                     | -                      | 44                 | 656           |
|            | P265/75R16    | 114T       | SL      | -            | OWL      | 352300       | 7.0- <b>(7.5)</b> -9.0            | 41           | 13.1                | 31.7                | 10.5                 | 2601                     | -                      | 44                 | 656           |
|            | LT265/75R16   | 123/120R   | E       | -            | BSW      | 352590       | 7.0- <b>(7.5)</b> -8.0            | 48.3         | 16                  | 31.7                | 10.5                 | 3415                     | 3085                   | 80                 | 656           |
|            | LT265/75R16   | 123/120R   | E       | -            | OWL      | 352600       | 7.0- <b>(7.5)</b> -8.0            | 47.2         | 16                  | 31.7                | 10.5                 | 3415                     | 3085                   | 80                 | 656           |
|            | LT265/75R16   | 112/109T   | C       | -            | BSW      | 352610       | 7.0- <b>(7.5)</b> -8.0            | 45.2         | 16                  | 31.7                | 10.5                 | 2470                     | 2270                   | 50                 | 656           |
|            | LT265/75R16   | 112/109T   | C       | -            | OWL      | 352620       | 7.0- <b>(7.5)</b> -8.0            | 48.3         | 16                  | 31.7                | 10.5                 | 2470                     | 2270                   | 50                 | 656           |
|            | LT285/75R16   | 126/123R   | E       | -            | OWL      | 352640       | 7.5- <b>(8.0)</b> -9.0            | 52.9         | 16.5                | 32.8                | 11.3                 | 3750                     | 3415                   | 80                 | 633           |
|            | LT285/75R16   | 126/123R   | E       | -            | BSW      | 352630       | 7.5- <b>(8.0)</b> -9.0            | 53.6         | 16.5                | 32.8                | 11.3                 | 3750                     | 3415                   | 80                 | 633           |
|            | LT295/75R16   | 128R       | E       | XT           | BSW      | 352820       | 7.5- <b>(8.0)</b> -9.5            | 63.7         | 17.1                | 33.4                | 11.6                 | 3970                     | -                      | 80                 | 622           |
|            | LT305/70R16   | 124/121R   | E       | XT           | BSW      | 352750       | 8.0- <b>(9.0)</b> -9.5            | 67.9         | 17.3                | 32.8                | 12.2                 | 3525                     | 3195                   | 65                 | 633           |
|            | LT315/75R16   | 127/124R   | E       | XT           | BSW      | 352770       | 8.0- <b>(8.5)</b> -11.0           | 71.7         | 17.4                | 34.6                | 12.3                 | 3860                     | 3525                   | 65                 | 601           |
| 17         | P235/65R17    | 103H       | SL      | -            | BSW      | 352050       | 6.5- <b>(7.0)</b> -8.5            | 34           | 12.5                | 29.1                | 9.4                  | 1929                     | -                      | 51                 | 715           |
|            | P235/75R17    | 108S       | SL      | -            | BSW      | 352260       | 6.0- <b>(6.5)</b> -8.0            | 39           | 12.7                | 30.9                | 9.3                  | 2205                     | -                      | 44                 | 673           |
|            | LT235/80R17   | 120/117R   | E       | -            | BSW      | 352470       | 6.0- <b>(6.5)</b> -7.5            | 43.7         | 15.6                | 31.8                | 9.3                  | 3085                     | 2835                   | 80                 | 653           |
|            | P245/65R17    | 105T       | SL      | -            | BSW      | 352020       | <b>(7.0)</b> -8.5                 | 35.7         | 12.6                | 29.4                | 9.8                  | 2039                     | -                      | 44                 | 705           |
|            | P245/65R17    | 105T       | SL      | -            | OWL      | 352030       | <b>(7.0)</b> -8.5                 | 33.4         | 12.6                | 29.5                | 9.8                  | 2039                     | -                      | 44                 | 704           |
|            | P245/70R17    | 108S       | SL      | -            | BSW      | 352160       | 6.5- <b>(7.0)</b> -8.0            | 38.1         | 12.9                | 30.6                | 9.8                  | 2205                     | -                      | 44                 | 680           |
|            | LT245/70R17   | 119/116R   | E       | -            | BSW      | 352570       | 6.5- <b>(7.0)</b> -8.0            | 46.3         | 15.7                | 30.6                | 9.8                  | 3000                     | 2755                   | 80                 | 680           |
|            | LT245/75R17   | 121/118S   | SL      | -            | BSW      | 352520       | 6.5- <b>(7.0)</b> -7.5            | 46.3         | 15.7                | 31.5                | 9.8                  | 3195                     | 2910                   | 80                 | 660           |
|            | P255/70R17    | 110S       | SL      | -            | BSW      | 352230       | 6.5- <b>(7.5)</b> -8.5            | 41.5         | 13                  | 31.1                | 10.2                 | 2337                     | -                      | 44                 | 668           |
|            | P265/65R17    | 110T       | SL      | -            | BSW      | 352040       | 7.5- <b>(8.0)</b> -9.5            | 39           | 12.9                | 30.5                | 10.8                 | 2337                     | -                      | 44                 | 681           |

LT

LIGHT TRUCK / SUV / CUV

| WHEEL DIA.    | TIRE SIZE     | LOAD/SPEED | LOAD ID | CONSTRUCTION | SIDEWALL    | PRODUCT CODE             | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|---------------|---------------|------------|---------|--------------|-------------|--------------------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 17            | P265/70R17    | 113S       | SL      | -            | BSW         | 352000                   | 7.0- <b>(8.0)</b> -9.0            | 41           | 13.1                | 31.5                | 10.7                 | 2535                     | -                      | 44                 | 659           |
|               | P265/70R17    | 113S       | SL      | -            | OWL         | 352010                   | 7.0- <b>(8.0)</b> -9.0            | 40.8         | 13.1                | 31.5                | 10.7                 | 2535                     | -                      | 44                 | 659           |
|               | LT265/70R17   | 121/118S   | E       | -            | BSW         | 352410                   | 7.0- <b>(8.0)</b> -8.5            | 48.7         | 16                  | 31.7                | 10.7                 | 3195                     | 2910                   | 80                 | 656           |
|               | LT265/70R17   | 121/118S   | E       | -            | OWL         | 352420                   | 7.0- <b>(8.0)</b> -8.5            | 48.7         | 16                  | 31.7                | 10.7                 | 3195                     | 2910                   | 80                 | 656           |
|               | P285/70R17    | 117T       | SL      | -            | BSW         | 352150                   | 7.5- <b>(8.5)</b> -9.5            | 48           | 13.4                | 32.8                | 11.5                 | 2833                     | -                      | 44                 | 634           |
|               | LT285/70R17   | 121/118S   | E       | -            | BSW         | 352430                   | 7.5- <b>(8.5)</b> -9.0            | 55.7         | 16.3                | 32.8                | 11.5                 | 3195                     | 2910                   | 80                 | 634           |
|               | LT285/70R17   | 121/118S   | E       | -            | OWL         | 352440                   | 7.5- <b>(8.5)</b> -9.0            | 50.5         | 16.3                | 32.8                | 11.5                 | 3195                     | 2910                   | 80                 | 634           |
|               | LT285/75R17   | 121/118S   | E       | XT           | BSW         | 352790                   | 7.5- <b>(8.0)</b> -9.5            | 63.1         | 17                  | 33.9                | 11.3                 | 3195                     | 2910                   | 80                 | 614           |
|               | LT305/70R17   | 121/118R   | E       | XT           | BSW         | 351170                   | 8.0- <b>(9.0)</b> -9.5            | 63.7         | 17.3                | 33.9                | 12.2                 | 3195                     | 2910                   | 65                 | 614           |
| 35X12.50R17LT | 121R          | E          | XT      | BSW          | 352810      | 8.5- <b>(10.0)</b> -11.0 | 69.9                              | 17.4         | 34.5                | 12.5                | 3195                 | -                        | 65                     | 602                |               |
| 18            | 255/55R18     | 109H       | XL      | -            | BSW         | 352220                   | 7.0- <b>(8.0)</b> -9.0            | 37.7         | 12.7                | 29                  | 10.4                 | 2271                     | -                      | 50                 | 716           |
|               | P255/70R18    | 112T       | SL      | -            | BSW         | 352250                   | 6.5- <b>(7.5)</b> -8.5            | 45           | 13                  | 32.1                | 10.2                 | 2469                     | -                      | 44                 | 647           |
|               | P265/60R18    | 109T       | SL      | -            | BSW         | 352240                   | 7.5- <b>(8.0)</b> -9.5            | 40.8         | 12.9                | 30.5                | 10.7                 | 2271                     | -                      | 44                 | 681           |
|               | P265/65R18    | 112S       | SL      | -            | BSW         | 352200                   | 7.5- <b>(8.0)</b> -9.5            | 43.9         | 12.9                | 31.5                | 10.7                 | 2469                     | -                      | 44                 | 659           |
|               | P265/70R18    | 114S       | SL      | -            | BSW         | 352180                   | 7.0- <b>(8.0)</b> -9.0            | 49.6         | 13.1                | 32.6                | 10.7                 | 2601                     | -                      | 44                 | 636           |
|               | P275/65R18    | 114T       | SL      | -            | BSW         | 352070                   | 7.5- <b>(8.0)</b> -9.5            | 50.7         | 13                  | 32.1                | 11                   | 2601                     | -                      | 44                 | 647           |
|               | LT275/65R18   | 123/120S   | E       | -            | BSW         | 352480                   | 7.5- <b>(8.0)</b> -9.0            | 52.8         | 16                  | 32.1                | 11                   | 3415                     | 3085                   | 80                 | 647           |
|               | LT275/65R18   | 123/120S   | E       | -            | OWL         | 352490                   | 7.5- <b>(8.0)</b> -9.0            | 50.3         | 16                  | 32.1                | 11                   | 3415                     | 3085                   | 80                 | 647           |
|               | LT275/65R18   | 113/110T   | C       | -            | OWL         | 352510                   | 7.5- <b>(8.0)</b> -9.0            | 50.3         | 16                  | 32.1                | 11                   | 2535                     | 2335                   | 50                 | 647           |
|               | LT275/65R18   | 113/110T   | C       | -            | BSW         | 352500                   | 7.5- <b>(8.0)</b> -9.0            | 52.7         | 16                  | 32.1                | 11                   | 2535                     | 2335                   | 50                 | 647           |
|               | LT275/70R18   | 125/122S   | E       | -            | BSW         | 352450                   | 7.0- <b>(8.0)</b> -8.5            | 53.1         | 16.1                | 33.2                | 11                   | 3640                     | 3305                   | 80                 | 626           |
|               | LT275/70R18   | 125/122S   | E       | -            | OWL         | 352460                   | 7.0- <b>(8.0)</b> -8.5            | 50.9         | 16.1                | 33.2                | 11                   | 3640                     | 3305                   | 80                 | 626           |
|               | 285/60R18     | 120S       | XL      | -            | BSW         | 352190                   | 8.0- <b>(8.5)</b> -10.0           | 53.8         | 13.6                | 31.5                | 11.5                 | 3086                     | -                      | 50                 | 660           |
|               | LT285/65R18   | 125/122S   | E       | XT           | BSW         | 352720                   | 8.0- <b>(8.5)</b> -10.0           | 58           | 16.9                | 32.6                | 11.5                 | 3640                     | 3305                   | 80                 | 638           |
|               | LT285/75R18   | 129/126S   | E       | XT           | BSW         | 352780                   | 7.5- <b>(8.0)</b> -9.5            | 65           | 17                  | 34.8                | 11.3                 | 4080                     | 3750                   | 80                 | 596           |
|               | LT295/70R18   | 129/126S   | E       | XT           | BSW         | 352850                   | 7.5- <b>(8.5)</b> -10.0           | 64.2         | 16.3                | 34.3                | 11.8                 | 4080                     | 3750                   | 80                 | 606           |
|               | LT325/60R18   | 124/121S   | E       | XT           | BSW         | 352760                   | 9.0- <b>(9.5)</b> -12.0           | 65.9         | 16.8                | 33.3                | 13                   | 3525                     | 3195                   | 65                 | 623           |
| LT325/65R18   | 127/124R      | E          | XT      | BSW          | 351190      | 9.0- <b>(9.5)</b> -12.0  | 70.8                              | 17.4         | 34.6                | 13                  | 3860                 | 3525                     | 65                     | 600                |               |
| 35X12.50R18LT | 123R          | E          | XT      | BSW          | 352710      | 8.5- <b>(10.0)</b> -11.0 | 80.7                              | 17           | 34.5                | 12.5                | 3415                 | -                        | 65                     | 602                |               |
| 35X12.50R18LT | 128Q          | F          | -       | BSW          | COMING SOON |                          |                                   |              |                     |                     |                      |                          |                        |                    |               |
| 20            | P275/55R20    | 111S       | SL      | -            | BSW         | 352170                   | 7.5- <b>(8.5)</b> -9.5            | 45.9         | 13                  | 31.9                | 11.2                 | 2403                     | -                      | 44                 | 652           |
|               | P275/60R20    | 114T       | SL      | -            | BSW         | 352060                   | 7.5- <b>(8.0)</b> -9.5            | 43.4         | 13                  | 33                  | 10.9                 | 2601                     | -                      | 44                 | 630           |
|               | LT275/65R20   | 126/123S   | E       | -            | BSW         | 352580                   | 7.5- <b>(8.0)</b> -9.5            | 56.7         | 16                  | 34.1                | 11                   | 3750                     | 3415                   | 80                 | 609           |
|               | LT285/55R20   | 122/119S   | E       | XT           | BSW         | 352800                   | 8.0- <b>(9.0)</b> -10.0           | 59.3         | 16                  | 32.4                | 11.7                 | 3305                     | 3000                   | 80                 | 642           |
|               | LT295/55R20   | 123/120S   | E       | XT           | BSW         | 352880                   | 8.0- <b>(9.5)</b> -10.0           | 60.8         | 16.3                | 32.8                | 12.2                 | 3415                     | 3085                   | 80                 | 634           |
|               | LT295/60R20   | 126/123S   | E       | XT           | BSW         | 352860                   | 8.0- <b>(8.5)</b> -10.0           | 62.4         | 16.4                | 33.9                | 11.8                 | 3750                     | 3415                   | 80                 | 612           |
|               | LT295/65R20   | 129/126S   | E       | XT           | BSW         | 352870                   | 8.0- <b>(8.5)</b> -10.0           | 63.7         | 17                  | 35.1                | 11.8                 | 4080                     | 3750                   | 80                 | 592           |
|               | 305/50R20     | 120T       | XL      | -            | BSW         | 350740                   | 8.5- <b>(9.5)</b> -11.0           | 51.2         | 13.9                | 32                  | 12.4                 | 3086                     | -                      | 50                 | 648           |
|               | 305/50R20     | 120S       | XL      | -            | BSW         | 352210                   | 8.5- <b>(9.5)</b> -11.0           | 51.2         | 13.9                | 32                  | 12.4                 | 3086                     | -                      | 50                 | 648           |
|               | LT305/55R20   | 121/118S   | E       | XT           | BSW         | 352740                   | 8.5- <b>(9.5)</b> -11.0           | 62.4         | 16.3                | 33.2                | 12.4                 | 3195                     | 2910                   | 65                 | 625           |
|               | LT305/55R20   | 125Q       | F       | -            | BSW         | COMING SOON              |                                   |              |                     |                     |                      |                          |                        |                    |               |
|               | LT325/60R20   | 126/123R   | E       | XT           | BSW         | 351180                   | 9.0- <b>(9.5)</b> -12.0           | 71.4         | 16.8                | 35.4                | 13                   | 3750                     | 3415                   | 65                 | 588           |
|               | 35X12.50R20LT | 121R       | E       | XT           | BSW         | 352730                   | 8.5- <b>(10.0)</b> -11.0          | 78.9         | 16.8                | 34.5                | 12.5                 | 3195                     | -                      | 65                 | 602           |
| 35X12.50R20LT | 125Q          | F          | -       | BSW          | COMING SOON |                          |                                   |              |                     |                     |                      |                          |                        |                    |               |
| 22            | LT325/50R22   | 122R       | E       | XT           | BSW         | 352830                   | 9.0- <b>(10.0)</b> -12.0          | 68.6         | 17                  | 34.8                | 13.2                 | 3305                     | -                      | 65                 | 596           |



LT

LIGHT TRUCK / SUV / CUV



## HIGHWAY ALL-SEASON TIRE

The Open Country H/T balances mileage, handling, and ride comfort in city and open-road driving. Designed for light trucks and large SUVs, this all-season tire is available in a wide range of original equipment sizes.

### POPULAR FITMENTS

Chevrolet Tahoe  
Chevrolet Trucks  
Ford Expedition  
Ford F-Series  
Ram Series  
Toyota Trucks

### UTQG

P-Metric/Metric  
S/T-Rated: 640 A B  
H/V-Rated: 640 A A

### WEAR-RESISTANT TREAD COMPOUND

- Extends tread life and durability.



# OPEN COUNTRY H/T

LT

LIGHT TRUCK / SUV / CUV

### STABILITY RIB IN SHOULDER AREA

- Promotes even shoulder wear.

### SYMMETRIC, VARIABLE PITCH TREAD DESIGN

- Contributes to a quiet, comfortable ride.

### TWO DEEP EVACUATION GROOVES

- Evacuates water to improve straight aquaplaning and handling performance.

### FULL-DEPTH MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Continues to aid with wet and snow traction as tire wears.





LT

LIGHT TRUCK / SUV / CUV

| WHEEL DIA. | TIRE SIZE     | LOAD/SPEED | LOAD ID | CONSTRUCTION | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|---------------|------------|---------|--------------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 15         | P225/70R15    | 100T       | SL      | -            | OWL      | 362030       | 6.0-( <b>6.5</b> )-7.5            | 26           | 12.6                | 27.4                | 8.9                  | 1753                     | -                      | 35                 | 757           |
|            | P225/75R15    | 102S       | SL      | -            | OWL      | 362140       | ( <b>6.0</b> )-7.5                | 28           | 12.6                | 28.3                | 8.9                  | 1874                     | -                      | 35                 | 733           |
|            | P235/70R15    | 102S       | SL      | -            | OWL      | 362040       | 6.0-( <b>7.0</b> )-8.0            | 28           | 12.7                | 28.0                | 9.4                  | 1896                     | -                      | 35                 | 743           |
|            | P235/75R15    | 105S       | SL      | -            | OWL      | 362150       | 6.0-( <b>6.5</b> )-8.0            | 31           | 12.7                | 28.9                | 9.3                  | 2028                     | -                      | 35                 | 719           |
|            | LT235/75R15   | 104/101S   | C       | -            | OWL      | 362210       | 6.0-( <b>6.5</b> )-7.0            | 34           | 14.0                | 28.8                | 9.5                  | 1985                     | 1820                   | 50                 | 722           |
|            | P265/70R15    | 110S       | SL      | -            | BSW      | 362050       | 7.0-( <b>8.0</b> )-9.0            | 37           | 13.1                | 29.6                | 10.4                 | 2337                     | -                      | 35                 | 702           |
|            | 31x10.50R15LT | 109S       | C       | -            | OWL      | 362000       | 7.0-( <b>8.5</b> )-9.0            | 43           | 15.6                | 30.3                | 10.9                 | 2270                     | -                      | 50                 | 685           |
|            |               |            |         |              |          |              |                                   |              |                     |                     |                      |                          |                        |                    |               |
| 16         | 215/65R16     | 98H        | SL      | -            | BSW      | 362340       | 6.0-( <b>6.5</b> )-7.5            | 25           | 12.2                | 27.0                | 8.8                  | 1653                     | -                      | 44                 | 770           |
|            | P215/70R16    | 99H        | SL      | -            | BSW      | 362060       | 5.5-( <b>6.5</b> )-7.0            | 28           | 12.5                | 27.9                | 8.7                  | 1709                     | -                      | 35                 | 744           |
|            | LT215/85R16   | 115/112S   | E       | -            | BSW      | 362290       | 5.5-( <b>6.0</b> )-7.0            | 41           | 15.0                | 30.4                | 8.9                  | 2680                     | 2470                   | 80                 | 683           |
|            | P225/70R16    | 101T       | SL      | -            | OWL      | 362070       | 6.0-( <b>6.5</b> )-7.5            | 29           | 12.6                | 28.4                | 9.0                  | 1819                     | -                      | 35                 | 731           |
|            | P225/75R16    | 104S       | SL      | -            | OWL      | 362160       | ( <b>6.0</b> )-7.5                | 31           | 12.6                | 29.3                | 8.9                  | 1984                     | -                      | 35                 | 708           |
|            | LT225/75R16   | 115/112S   | E       | -            | BSW      | 362220       | ( <b>6.0</b> )-7.0                | 39           | 13.9                | 29.3                | 9.1                  | 2680                     | 2470                   | 80                 | 710           |
|            | 235/60R16     | 100H       | SL      | -            | BSW      | 362330       | 6.5-( <b>7.0</b> )-8.5            | 28           | 12.5                | 27.1                | 9.4                  | 1764                     | -                      | 44                 | 767           |
|            | P235/65R16    | 101S       | SL      | -            | BSW      | 362360       | 6.5-( <b>7.0</b> )-8.5            | 31           | 12.5                | 28.0                | 9.6                  | 1819                     | -                      | 35                 | 741           |
|            | P235/70R16    | 104T       | SL      | -            | OWL      | 362080       | 6.0-( <b>7.0</b> )-8.0            | 30           | 12.7                | 28.9                | 9.3                  | 1984                     | -                      | 35                 | 718           |
|            | P235/75R16    | 106S       | SL      | -            | OWL      | 362660       | 6.0-( <b>6.5</b> )-8.0            | 34           | 12.9                | 29.8                | 9.4                  | 2094                     | -                      | 35                 | 697           |
|            | LT235/85R16   | 120/116S   | E       | -            | OWL      | 362280       | 6.0-( <b>6.5</b> )-7.5            | 44           | 15.2                | 31.8                | 9.4                  | 3042                     | 2778                   | 80                 | 654           |
|            | P245/70R16    | 106S       | SL      | -            | OWL      | 362090       | 6.5-( <b>7.0</b> )-8.0            | 35           | 12.9                | 29.4                | 9.6                  | 2094                     | -                      | 35                 | 706           |
|            | P245/75R16    | 109S       | SL      | -            | OWL      | 362170       | 6.5-( <b>7.0</b> )-8.0            | 40           | 12.9                | 30.4                | 9.8                  | 2271                     | -                      | 35                 | 683           |
|            | LT245/75R16   | 120/116S   | E       | -            | OWL      | 362230       | 6.5-( <b>7.0</b> )-8.0            | 45           | 15.2                | 30.4                | 9.8                  | 3042                     | 2778                   | 80                 | 684           |
|            | 255/65R16     | 109H       | SL      | -            | BSW      | 362350       | 7.0-( <b>7.5</b> )-9.0            | 34           | 12.7                | 29.1                | 10.2                 | 2271                     | -                      | 44                 | 715           |
|            | P255/70R16    | 109S       | SL      | -            | OWL      | 362100       | 6.5-( <b>7.5</b> )-8.5            | 38           | 13.0                | 30.0                | 10.1                 | 2271                     | -                      | 35                 | 692           |
|            | P265/70R16    | 111S       | SL      | -            | OWL      | 362110       | 7.0-( <b>8.0</b> )-9.0            | 40           | 13.1                | 30.6                | 10.4                 | 2403                     | -                      | 35                 | 678           |
|            | P265/75R16    | 114T       | SL      | -            | OWL      | 362180       | 7.0-( <b>7.5</b> )-9.0            | 41           | 13.1                | 31.5                | 10.4                 | 2601                     | -                      | 35                 | 659           |
|            | LT265/75R16   | 112/109S   | C       | -            | OWL      | 362240       | 7.0-( <b>7.5</b> )-8.0            | 45           | 15.6                | 31.6                | 10.8                 | 2470                     | 2270                   | 50                 | 658           |
|            | LT265/75R16   | 119/116S   | D       | -            | OWL      | 362250       | 7.0-( <b>7.5</b> )-8.0            | 49           | 15.6                | 31.6                | 10.8                 | 3000                     | 2755                   | 65                 | 658           |
|            | LT265/75R16   | 123/120S   | E       | -            | OWL      | 362260       | 7.0-( <b>7.5</b> )-8.0            | 50           | 15.6                | 31.6                | 10.8                 | 3415                     | 3085                   | 80                 | 658           |
|            | P275/70R16    | 114H       | SL      | -            | BSW      | 362120       | 7.0-( <b>8.0</b> )-9.0            | 41           | 13.2                | 31.1                | 10.8                 | 2601                     | -                      | 35                 | 667           |
|            | LT285/75R16   | 126/123S   | E       | -            | OWL      | 362920       | 7.5-( <b>8.0</b> )-9.0            | 56           | 16.5                | 32.8                | 11.4                 | 3750                     | 3415                   | 80                 | 633           |
| 17         | 225/65R17     | 102H       | SL      | -            | BSW      | 362510       | 6.0-( <b>6.5</b> )-8.0            | 30           | 12.3                | 28.5                | 8.9                  | 1874                     | -                      | 44                 | 729           |
|            | P235/60R17    | 100S       | SL      | -            | OWL      | 362630       | 6.5-( <b>7.0</b> )-8.5            | 32           | 11.3                | 28.2                | 9.4                  | 1764                     | -                      | 35                 | 737           |
|            | P235/60R17    | 100S       | SL      | -            | BSW      | 363060       | 6.5-( <b>7.0</b> )-8.5            | 34           | 12.5                | 28.2                | 9.4                  | 1764                     | -                      | 35                 | 737           |
|            | 235/65R17     | 104H       | SL      | -            | BSW      | 363000       | 6.5-( <b>7.0</b> )-8.5            | 37           | 12.5                | 29.1                | 9.4                  | 1984                     | -                      | 44                 | 713           |
|            | 235/65R17     | 104H       | SL      | -            | OWL      | 362370       | 6.5-( <b>7.0</b> )-8.5            | 33           | 12.5                | 29.0                | 9.4                  | 1984                     | -                      | 44                 | 716           |
|            | P235/70R17    | 108S       | RD      | -            | BSW      | 363070       | 6.0-( <b>7.0</b> )-8.0            | 38           | 12.7                | 29.9                | 9.4                  | 2205                     | -                      | 41                 | 695           |
|            | P235/70R17    | 108S       | RD      | -            | OWL      | 362650       | 6.0-( <b>7.0</b> )-8.0            | 32           | 12.7                | 29.9                | 9.4                  | 2205                     | -                      | 41                 | 695           |
|            | P235/75R17    | 108S       | SL      | -            | OWL      | 362670       | 6.0-( <b>6.5</b> )-8.0            | 36           | 12.9                | 30.9                | 9.5                  | 2205                     | -                      | 35                 | 673           |
|            | LT235/80R17   | 120/117S   | E       | -            | BSW      | 362270       | 6.0-( <b>6.5</b> )-7.5            | 43           | 15.2                | 31.7                | 9.2                  | 3085                     | 2835                   | 80                 | 655           |
|            | P245/65R17    | 105H       | SL      | -            | OWL      | 362010       | ( <b>7.0</b> )-8.5                | 34           | 12.6                | 29.5                | 9.7                  | 2039                     | -                      | 35                 | 704           |
|            | P245/65R17    | 105H       | SL      | -            | BSW      | 362990       | ( <b>7.0</b> )-8.5                | 38           | 12.6                | 29.5                | 9.7                  | 2039                     | -                      | 35                 | 704           |
|            | P245/70R17    | 108S       | SL      | -            | BSW      | 363020       | 6.5-( <b>7.0</b> )-8.0            | 41           | 12.9                | 30.4                | 9.8                  | 2205                     | -                      | 35                 | 683           |
|            | P245/70R17    | 108S       | SL      | -            | OWL      | 362300       | 6.5-( <b>7.0</b> )-8.0            | 38           | 12.9                | 30.6                | 9.8                  | 2205                     | -                      | 35                 | 680           |
|            | LT245/70R17   | 119/116S   | E       | -            | BSW      | 363040       | 6.5-( <b>7.0</b> )-8.0            | 46           | 15.4                | 30.6                | 9.9                  | 3000                     | 2755                   | 80                 | 678           |
|            | LT245/70R17   | 119/116S   | E       | -            | OWL      | 362190       | 6.5-( <b>7.0</b> )-8.0            | 44           | 15.4                | 30.5                | 9.8                  | 3000                     | 2755                   | 80                 | 681           |
|            | P245/75R17    | 110S       | SL      | -            | OWL      | 362680       | 6.5-( <b>7.0</b> )-8.0            | 38           | 12.9                | 31.5                | 9.8                  | 2337                     | -                      | 35                 | 660           |
|            | LT245/75R17   | 121/118S   | E       | -            | BSW      | 362620       | 6.5-( <b>7.0</b> )-7.5            | 47           | 15.2                | 31.5                | 9.9                  | 3195                     | 2910                   | 80                 | 660           |
|            | LT245/75R17   | 121/118S   | E       | -            | BSW      | 362780       | 6.5-( <b>7.0</b> )-7.5            | 49           | 15.2                | 31.5                | 9.8                  | 3195                     | 2910                   | 80                 | 660           |
|            | 255/60R17     | 106H       | SL      | -            | BSW      | 362590       | 7.0-( <b>7.0</b> )-9.0            | 35           | 12.9                | 29.1                | 10.3                 | 2094                     | -                      | 44                 | 715           |
|            | P255/65R17    | 108S       | SL      | -            | BSW      | 363030       | 7.0-( <b>7.0</b> )-9.0            | 40           | 12.7                | 30.1                | 10.4                 | 2205                     | -                      | 35                 | 691           |

LT

LIGHT TRUCK / SUV / CUV

| WHEEL DIA.  | TIRE SIZE   | LOAD/SPEED | LOAD ID | CONSTRUCTION | SIDEWALL | PRODUCT CODE  | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|-------------|-------------|------------|---------|--------------|----------|---------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 17          | P255/65R17  | 108S       | SL      | -            | OWL      | 362430        | 7.0-(7.5)-9.0                     | 38           | 12.7                | 30.1                | 10.3                 | 2205                     | -                      | 35                 | 691           |
|             | P255/70R17  | 110S       | SL      | -            | OWL      | 362310        | 6.5-(7.5)-8.5                     | 41           | 13.0                | 31.1                | 10.3                 | 2337                     | -                      | 35                 | 668           |
|             | P255/70R17  | 110S       | SL      | -            | BSW      | 363050        | 6.5-(7.5)-8.5                     | 42           | 13.0                | 31.1                | 10.3                 | 2337                     | -                      | 35                 | 668           |
|             | P265/65R17  | 110S       | SL      | -            | BSW      | 363010        | 7.5-(8.0)-9.5                     | 42           | 12.9                | 30.6                | 10.8                 | 2337                     | -                      | 35                 | 680           |
|             | P265/65R17  | 110S       | SL      | -            | OWL      | 362020        | 7.5-(8.0)-9.5                     | 40           | 12.9                | 30.5                | 10.6                 | 2337                     | -                      | 35                 | 682           |
|             | P265/70R17  | 113T       | SL      | -            | OWL      | 362130        | 7.0-(8.0)-9.0                     | 42           | 13.1                | 31.5                | 10.7                 | 2535                     | -                      | 35                 | 659           |
|             | P265/70R17  | 113T       | SL      | -            | BSW      | 362980        | 7.0-(8.0)-9.0                     | 45           | 13.1                | 31.5                | 10.8                 | 2535                     | -                      | 35                 | 660           |
|             | LT265/70R17 | 121/118S   | E       | -            | BSW      | 362770        | 7.0-(8.0)-8.5                     | 51           | 15.6                | 31.6                | 10.7                 | 3195                     | 2910                   | 80                 | 658           |
|             | LT265/70R17 | 121/118S   | E       | -            | OWL      | 362200        | 7.0-(8.0)-8.5                     | 50           | 15.6                | 31.6                | 10.7                 | 3195                     | 2910                   | 80                 | 658           |
|             | P285/70R17  | 117T       | SL      | -            | BSW      | 362540        | 7.5-(8.5)-9.5                     | 45           | 13.4                | 32.7                | 11.4                 | 2833                     | -                      | 35                 | 636           |
| LT285/70R17 | 121/118S    | E          | -       | OWL          | 362940   | 7.5-(8.5)-9.0 | 55                                | 16.5         | 32.7                | 11.7                | 3195                 | 2910                     | 80                     | 636                |               |
| 18          | 235/55R18   | 100V       | SL      | -            | BSW      | 362400        | 6.5-(7.5)-8.5                     | 27           | 10.1                | 28.2                | 9.6                  | 1764                     | -                      | 44                 | 738           |
|             | 235/60R18   | 107V       | RD      | -            | BSW      | 362560        | 6.5-(7.0)-8.5                     | 33           | 10.7                | 29.1                | 9.4                  | 2150                     | -                      | 50                 | 714           |
|             | P235/65R18  | 104T       | SL      | -            | BSW      | 362640        | 6.5-(7.0)-8.5                     | 32           | 12.5                | 30.2                | 9.6                  | 1984                     | -                      | 35                 | 689           |
|             | P245/60R18  | 104H       | SL      | -            | BSW      | 362760        | (7.0)-8.5                         | 35           | 12.6                | 29.6                | 9.6                  | 1984                     | -                      | 35                 | 701           |
|             | 255/55R18   | 109V       | RD      | -            | BSW      | 362570        | 7.0-(8.0)-9.0                     | 36           | 12.2                | 29.1                | 10.4                 | 2271                     | -                      | 50                 | 715           |
|             | 255/60R18   | 112H       | RD      | -            | BSW      | 362600        | 7.0-(7.5)-9.0                     | 37           | 12.7                | 30.0                | 10.1                 | 2469                     | -                      | 50                 | 692           |
|             | P255/65R18  | 109S       | SL      | -            | BSW      | 364150        | 7.0-(7.5)-9.0                     | 39           | 11.6                | 31.1                | 10.2                 | 2271                     | -                      | 44                 | 669           |
|             | 255/70R18   | 113S       | SL      | -            | BSW      | 362610        | 6.5-(7.5)-8.5                     | 39           | 11.8                | 32.2                | 10.4                 | 2535                     | -                      | 44                 | 646           |
|             | P265/60R18  | 109T       | SL      | -            | OWL      | 362460        | 7.0-(8.0)-9.5                     | 37           | 12.9                | 30.5                | 10.6                 | 2271                     | -                      | 35                 | 682           |
|             | P265/60R18  | 109T       | SL      | -            | BSW      | 363080        | 7.5-(8.0)-9.5                     | 42           | 12.9                | 30.5                | 10.8                 | 2271                     | -                      | 35                 | 681           |
|             | P265/65R18  | 112S       | SL      | -            | BSW      | 362910        | 7.5-(8.0)-9.5                     | 41           | 12.9                | 31.5                | 10.7                 | 2469                     | -                      | 35                 | 660           |
|             | P265/70R18  | 114S       | SL      | -            | BSW      | 362830        | 7.0-(8.0)-9.0                     | 48           | 13.1                | 32.6                | 10.8                 | 2601                     | -                      | 35                 | 636           |
|             | P265/70R18  | 114S       | SL      | -            | OWL      | 362320        | 7.0-(8.0)-9.0                     | 44           | 13.1                | 32.6                | 10.8                 | 2601                     | -                      | 35                 | 636           |
|             | P275/60R18  | 111H       | SL      | -            | BSW      | 362710        | 7.5-(8.0)-9.5                     | 39           | 13.0                | 30.8                | 10.9                 | 2403                     | -                      | 35                 | 675           |
|             | P275/65R18  | 114T       | SL      | -            | BSW      | 362840        | 7.5-(8.0)-9.5                     | 47           | 13.0                | 32.2                | 11.0                 | 2601                     | -                      | 35                 | 646           |
|             | P275/65R18  | 114T       | SL      | -            | OWL      | 362470        | 7.5-(8.0)-9.5                     | 44           | 13.0                | 32.2                | 11.0                 | 2601                     | -                      | 35                 | 646           |
|             | LT275/65R18 | 123S       | E       | -            | OWL      | 362480        | 7.5-(8.0)-9.0                     | 52           | 15.6                | 32.0                | 10.9                 | 3415                     | -                      | 80                 | 650           |
|             | LT275/65R18 | 123S       | E       | -            | BSW      | 362790        | 7.5-(8.0)-9.0                     | 53           | 15.6                | 32.0                | 10.9                 | 3415                     | -                      | 80                 | 650           |
| LT275/70R18 | 125S        | E          | -       | BSW          | 363090   | 7.0-(8.0)-8.5 | 55                                | 15.6         | 33.1                | 11.2                | 3640                 | -                        | 80                     | 628                |               |
| LT275/70R18 | 125S        | E          | -       | OWL          | 362450   | 7.0-(8.0)-8.5 | 53                                | 15.6         | 33.1                | 11.0                | 3640                 | -                        | 80                     | 628                |               |
| 19          | P245/55R19  | 103S       | SL      | -            | BSW      | 362850        | 7.0-(7.5)-8.5                     | 34           | 12.6                | 29.7                | 9.6                  | 1929                     | -                      | 44                 | 700           |
|             | 255/55R19   | 111V       | RD      | -            | BSW      | 362580        | 7.0-(8.0)-9.0                     | 38           | 12.2                | 30.0                | 10.4                 | 2403                     | -                      | 50                 | 692           |
|             | 255/60R19   | 109H       | SL      | -            | BSW      | 364080        | 7.0-(7.5)-9.0                     | 37           | 12.7                | 31.1                | 10.2                 | 2271                     | -                      | 44                 | 669           |
| 20          | P235/55R20  | 102T       | SL      | -            | BSW      | 362860        | 6.5-(7.5)-8.5                     | 34           | 12.5                | 30.2                | 9.4                  | 1874                     | -                      | 44                 | 687           |
|             | P245/50R20  | 102V       | SL      | -            | BSW      | 364130        | 7.0-(7.5)-8.5                     | 37           | 11.8                | 29.7                | 10.0                 | 1874                     | -                      | 44                 | 700           |
|             | P255/55R20  | 107H       | SL      | -            | BSW      | 364140        | 7.0-(8.0)-9.0                     | 38           | 12.7                | 31.0                | 10.4                 | 2149                     | -                      | 44                 | 670           |
|             | 265/50R20   | 111V       | RD      | -            | BSW      | 362690        | 7.5-(8.5)-9.5                     | 40           | 10.8                | 30.4                | 10.9                 | 2403                     | -                      | 50                 | 683           |
|             | 275/55R20   | 117S       | RD      | -            | OWL      | 362700        | 7.5-(8.5)-9.5                     | 42           | 13.0                | 31.9                | 11.4                 | 2833                     | -                      | 50                 | 651           |
|             | P275/60R20  | 114S       | SL      | -            | OWL      | 362890        | 7.5-(8.0)-9.5                     | 47           | 13.0                | 33.1                | 10.9                 | 2601                     | -                      | 35                 | 627           |
| 22          | 285/45R22   | 114H       | RD      | -            | BSW      | 362720        | 9.0-(9.5)-10.5                    | 43           | 12.2                | 32.0                | 11.2                 | 2601                     | -                      | 50                 | 648           |



LT

LIGHT TRUCK / SUV / CUV



## CUV/SUV TOURING ALL-SEASON TIRE

The Open Country Q/T offers a quiet, comfortable ride; impressive tread life; and attractive design. Built for a wide range of vehicles, from CUVs to luxury SUVs, this premium all-season tire also provides confident handling and stability.

### POPULAR FITMENTS

Acura MDX  
BMW X-series  
Cadillac Escalade  
Lexus NX/RX  
Porsche Macan  
Toyota RAV4

### UTQG

H/V-rated: 680 A A  
S/T-rated: 680 A B

### FOUR WIDE CIRCUMFERENTIAL GROOVES

- Evacuates water to improve wet traction.



# OPEN COUNTRY Q/T

LT

LIGHT TRUCK / SUV / CUV

### OPEN LATERAL SLITS

- Improves water drainage and straight aquaplaning.

### SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

### MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on wet and dry roads.
- Improves light snow traction.





|    | WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS)<br>SINGLE | MAX LOAD (LBS)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|------------|------------|---------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|--------------------------|------------------------|--------------------|---------------|
| 16 |            | 215/70R16  | 100H       | SL      | BSW      | 318050       | 5.5- <b>(6.5)</b> -7.0            | 29           | 12.2                | 27.9                | 8.7                  | 1764                     | -                      | 51                 | 745           |
|    |            | 225/70R16  | 103H       | SL      | BSW      | 318060       | 6.0- <b>(6.5)</b> -7.5            | 31           | 12.3                | 28.4                | 9.0                  | 1929                     | -                      | 51                 | 731           |
|    |            | P235/70R16 | 104T       | SL      | BSW      | 318070       | 6.0- <b>(7.0)</b> -8.0            | 33           | 12.5                | 29.0                | 9.4                  | 1984                     | -                      | 44                 | 717           |
|    |            | 255/65R16  | 109H       | SL      | BSW      | 318120       | 7.0- <b>(7.5)</b> -9.0            | 37           | 12.7                | 29.1                | 10.2                 | 2271                     | -                      | 51                 | 715           |
| 17 |            | 225/65R17  | 102H       | SL      | BSW      | 318010       | 6.0- <b>(6.5)</b> -8.0            | 31           | 12.3                | 28.5                | 9.0                  | 1874                     | -                      | 51                 | 729           |
|    |            | 235/60R17  | 102T       | SL      | BSW      | 318160       | 6.5- <b>(7.0)</b> -8.5            | 33           | 12.5                | 28.1                | 9.4                  | 1874                     | -                      | 44                 | 739           |
|    |            | 235/65R17  | 108V       | XL      | BSW      | 318090       | 6.5- <b>(7.0)</b> -8.5            | 33           | 12.0                | 29.1                | 9.4                  | 2205                     | -                      | 50                 | 715           |
|    |            | P245/65R17 | 105H       | SL      | BSW      | 318110       | <b>(7.0)</b> -8.5                 | 37           | 12.6                | 29.5                | 9.8                  | 2039                     | -                      | 51                 | 704           |
|    |            | 255/60R17  | 106V       | SL      | BSW      | 318190       | 7.0- <b>(7.5)</b> -9.0            | 36           | 12.2                | 29.1                | 10.2                 | 2094                     | -                      | 51                 | 715           |
|    |            | P265/65R17 | 110S       | SL      | BSW      | 318140       | 7.5- <b>(8.0)</b> -9.5            | 42           | 12.9                | 30.6                | 10.7                 | 2337                     | -                      | 44                 | 680           |
|    |            | P265/70R17 | 113H       | SL      | BSW      | 318000       | 7.0- <b>(8.0)</b> -9.0            | 42           | 12.9                | 31.7                | 10.7                 | 2535                     | -                      | 51                 | 656           |
|    |            | 235/55R18  | 100V       | SL      | BSW      | 318240       | 6.5- <b>(7.5)</b> -8.5            | 32           | 12.0                | 28.1                | 9.6                  | 1764                     | -                      | 51                 | 738           |
|    |            | 235/60R18  | 107V       | XL      | BSW      | 318170       | 6.5- <b>(7.0)</b> -8.5            | 33           | 12.0                | 29.1                | 9.4                  | 2149                     | -                      | 50                 | 714           |
| 18 |            | 235/65R18  | 106H       | SL      | BSW      | 318100       | 6.5- <b>(7.0)</b> -8.5            | 34           | 12.5                | 30.0                | 9.4                  | 2094                     | -                      | 51                 | 692           |
|    |            | 245/60R18  | 105H       | SL      | BSW      | 318180       | <b>(7.0)</b> -8.5                 | 35           | 12.6                | 29.6                | 9.8                  | 2039                     | -                      | 51                 | 703           |
|    |            | 255/55R18  | 109V       | XL      | BSW      | 318020       | 7.0- <b>(8.0)</b> -9.0            | 36           | 12.2                | 29.0                | 10.4                 | 2271                     | -                      | 50                 | 716           |
|    |            | 255/60R18  | 112V       | XL      | BSW      | 318200       | 7.0- <b>(7.5)</b> -9.0            | 37           | 12.2                | 30.0                | 10.2                 | 2469                     | -                      | 50                 | 692           |
|    |            | P255/65R18 | 109S       | SL      | BSW      | 318130       | 7.0- <b>(7.5)</b> -9.0            | 39           | 12.7                | 31.1                | 10.2                 | 2271                     | -                      | 44                 | 669           |
|    |            | 265/60R18  | 110V       | SL      | BSW      | 318220       | 7.5- <b>(8.0)</b> -9.5            | 40           | 12.2                | 30.5                | 10.7                 | 2337                     | -                      | 51                 | 681           |
|    |            | P265/65R18 | 112H       | SL      | BSW      | 318150       | 7.5- <b>(8.0)</b> -9.5            | 43           | 12.9                | 31.5                | 10.7                 | 2469                     | -                      | 51                 | 659           |

|    | WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS.) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS.)<br>SINGLE | MAX LOAD (LBS.)<br>DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|------------|------------|---------|----------|--------------|-----------------------------------|---------------|---------------------|---------------------|----------------------|---------------------------|-------------------------|--------------------|---------------|
| 19 |            | P225/55R19 | 99V        | SL      | BSW      | 318230       | 6.0- <b>(7.0)</b> -8.0            | 33            | 11.8                | 28.8                | 9.2                  | 1709                      | -                       | 51                 | 722           |
|    |            | 235/50R19  | 99H        | SL      | BSW      | 318310       | 6.5- <b>(7.5)</b> -8.5            | 32            | 12.0                | 28.3                | 9.6                  | 1709                      | -                       | 51                 | 734           |
|    |            | 235/55R19  | 105V       | XL      | BSW      | 318250       | 6.5- <b>(7.5)</b> -8.5            | 33            | 12.0                | 29.2                | 9.6                  | 2039                      | -                       | 50                 | 712           |
|    |            | P245/55R19 | 103H       | SL      | BSW      | 318270       | 7.0- <b>(7.5)</b> -8.5            | 36            | 12.6                | 29.6                | 10.0                 | 1929                      | -                       | 51                 | 701           |
|    |            | 255/50R19  | 107V       | XL      | BSW      | 318330       | 7.0- <b>(8.0)</b> -9.0            | 36            | 12.2                | 29.1                | 10.4                 | 2149                      | -                       | 50                 | 714           |
|    |            | 255/55R19  | 111V       | XL      | BSW      | 318280       | 7.0- <b>(8.0)</b> -9.0            | 38            | 12.2                | 30.0                | 10.4                 | 2403                      | -                       | 50                 | 692           |
|    |            | 255/60R19  | 109H       | SL      | BSW      | 318210       | 7.0- <b>(7.5)</b> -9.0            | 40            | 12.7                | 31.1                | 10.2                 | 2271                      | -                       | 51                 | 669           |
|    |            | 265/50R19  | 110V       | XL      | BSW      | 318350       | 7.5- <b>(8.5)</b> -9.5            | 38            | 12.2                | 29.5                | 10.9                 | 2337                      | -                       | 50                 | 704           |
|    |            | 275/55R19  | 111V       | SL      | BSW      | 318300       | 7.5- <b>(8.5)</b> -9.5            | 42            | 12.3                | 30.9                | 11.2                 | 2403                      | -                       | 51                 | 672           |
|    |            | 235/55R20  | 102V       | SL      | BSW      | 318370       | 6.5- <b>(7.5)</b> -8.5            | 35            | 12.5                | 30.2                | 9.6                  | 1874                      | -                       | 51                 | 689           |
| 20 |            | P245/50R20 | 102V       | SL      | BSW      | 318320       | 7.0- <b>(7.5)</b> -8.5            | 37            | 12.1                | 29.7                | 10.0                 | 1874                      | -                       | 51                 | 700           |
|    |            | 255/50R20  | 109V       | XL      | BSW      | 318340       | 7.0- <b>(8.0)</b> -9.0            | 36            | 12.2                | 30.1                | 10.4                 | 2271                      | -                       | 50                 | 691           |
|    |            | 255/55R20  | 110V       | XL      | BSW      | 318290       | 7.0- <b>(8.0)</b> -9.0            | 39            | 12.2                | 31.0                | 10.4                 | 2337                      | -                       | 50                 | 670           |
|    |            | 265/50R20  | 111V       | XL      | BSW      | 318360       | 7.5- <b>(8.5)</b> -9.5            | 39            | 12.2                | 30.5                | 10.9                 | 2403                      | -                       | 50                 | 682           |
| 22 |            | P285/45R22 | 110H       | SL      | BSW      | 318030       | 9.0- <b>(9.5)</b> -10.5           | 47            | 12.5                | 32.1                | 11.2                 | 2337                      | -                       | 51                 | 647           |

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



STREET/SPORT TRUCK ALL-SEASON TIRE

Developed for sport trucks, SUVs, and CUVs, the stylish design and advanced tread elements of this premium tire deliver the perfect balance of style and performance. The Proxes ST II provides superb handling, confident all-season performance, consistent wear, and a smooth, quiet ride.

POPULAR FITMENTS

Cadillac Escalade  
Chevrolet Tahoe  
Infiniti Q-Series  
Land Rover Range Rover  
Porsche Cayenne  
Toyota Sequoia

UTQG

V/W-Rated: 420 A A  
Y-Rated: 280 A A

COMPUTER-OPTIMIZED,  
ALL-SEASON TREAD DESIGN

- Provides a good balance between wet traction and dry handling.

SILENT WALL™ TECHNOLOGY

- Reduces pipe resonance, resulting in a quieter ride.

FIVE VARIABLE PITCH DESIGN  
ON SHOULDER

- Reduces pattern noise.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves light snow traction.

LINEAR GROOVING

- Lowers pressure on the block edge for better wear and handling.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|-----------------------|--------------------|---------------|
| 16         | 265/70R16 | 112V       | SL      | BSW      | 244010       | 7.0-(8.0)-9.0                  | 34           | 11.2                | 30.6                | 10.9                 | 2469                  | 51                 | 679           |
|            | 275/60R16 | 109V       | SL      | BSW      | 244020       | 7.5-(8.0)-9.5                  | 35           | 11.2                | 28.9                | 10.9                 | 2271                  | 51                 | 719           |
| 17         | 225/55R17 | 97V        | SL      | BSW      | 244070       | 6.0-(7.0)-8.0                  | 28           | 10.6                | 26.7                | 9.1                  | 1609                  | 51                 | 777           |
|            | 235/65R17 | 104V       | SL      | BSW      | 244030       | 6.5-(7.0)-8.5                  | 30           | 10.7                | 29.0                | 9.3                  | 1984                  | 51                 | 717           |
|            | 255/60R17 | 110V       | XL      | BSW      | 244060       | 7.0-(7.5)-9.0                  | 34           | 11.0                | 29.0                | 10.1                 | 2337                  | 50                 | 717           |
|            | 275/55R17 | 109V       | SL      | BSW      | 244080       | 7.5-(8.5)-9.5                  | 35           | 11.2                | 28.9                | 10.9                 | 2271                  | 51                 | 720           |
|            | 275/60R17 | 110V       | SL      | BSW      | 244040       | 7.5-(8.0)-9.5                  | 37           | 11.2                | 29.9                | 10.8                 | 2337                  | 51                 | 694           |
|            | 285/60R17 | 114V       | SL      | BSW      | 244050       | 8.0-(8.5)-10.0                 | 39           | 11.3                | 30.4                | 11.4                 | 2601                  | 51                 | 684           |
| 18         | 255/45R18 | 99V        | SL      | BSW      | 244150       | 8.0-(8.5)-9.5                  | 29           | 10.3                | 27.0                | 9.8                  | 1709                  | 51                 | 769           |
|            | 255/50R18 | 106V       | XL      | BSW      | 244130       | 7.0-(8.0)-9.0                  | 33           | 10.8                | 28.1                | 10.2                 | 2094                  | 50                 | 740           |
|            | 255/55R18 | 109V       | XL      | BSW      | 244110       | 7.0-(8.0)-9.0                  | 34           | 11.0                | 29.0                | 10.2                 | 2271                  | 50                 | 717           |
|            | 255/60R18 | 112V       | XL      | BSW      | 244090       | 7.0-(7.5)-9.0                  | 36           | 11.0                | 30.0                | 9.9                  | 2469                  | 50                 | 693           |
|            | 285/60R18 | 116V       | SL      | BSW      | 244100       | 8.0-(8.5)-10.0                 | 40           | 11.3                | 31.3                | 11.3                 | 2756                  | 51                 | 663           |
|            | 295/45R18 | 108V       | SL      | BSW      | 244160       | 9.5-(10.0)-11.0                | 34           | 10.8                | 28.3                | 11.4                 | 2205                  | 51                 | 733           |
| 19         | 255/50R19 | 103V       | SL      | BSW      | 244180       | 7.0-(8.0)-9.0                  | 34           | 10.8                | 29.1                | 10.2                 | 1929                  | 51                 | 715           |
|            | 255/55R19 | 111V       | XL      | BSW      | 244170       | 7.0-(8.0)-9.0                  | 36           | 11.0                | 30.0                | 10.3                 | 2403                  | 50                 | 693           |
|            | 275/45R19 | 108Y       | XL      | BSW      | 244190       | 8.5-(9.0)-10.5                 | 32           | 10.1                | 28.7                | 10.7                 | 2205                  | 50                 | 724           |
|            | 285/45R19 | 111V       | XL      | BSW      | 244560       | 9.0-(9.5)-10.5                 | 37           | 10.7                | 29.1                | 11.2                 | 2403                  | 50                 | 714           |
| 20         | 245/50R20 | 102V       | SL      | BSW      | 244220       | 7.0-(7.5)-8.5                  | 36           | 10.7                | 29.7                | 10.0                 | 1874                  | 51                 | 698           |
|            | 255/40R20 | 101V       | XL      | BSW      | 244310       | 8.5-(9.0)-10.0                 | 33           | 10.3                | 28.0                | 10.0                 | 1819                  | 50                 | 741           |
|            | 255/45R20 | 105V       | XL      | BSW      | 244270       | 8.0-(8.5)-9.5                  | 34           | 10.3                | 29.0                | 9.9                  | 2039                  | 50                 | 716           |
|            | 255/50R20 | 109V       | XL      | BSW      | 244230       | 7.0-(8.0)-9.0                  | 38           | 10.8                | 30.0                | 10.2                 | 2271                  | 50                 | 692           |
|            | 265/45R20 | 108V       | XL      | BSW      | 244280       | 8.5-(9.0)-10.0                 | 35           | 10.5                | 29.4                | 10.2                 | 2205                  | 50                 | 707           |
|            | 265/50R20 | 111V       | XL      | BSW      | 244240       | 7.5-(8.5)-9.5                  | 39           | 11.0                | 30.4                | 10.8                 | 2403                  | 50                 | 683           |
|            | 275/40R20 | 106W       | XL      | BSW      | 244320       | 9.0-(9.5)-11.0                 | 34           | 10.6                | 28.7                | 10.7                 | 2094                  | 50                 | 725           |
|            | 275/45R20 | 110V       | XL      | BSW      | 244290       | 8.5-(9.0)-10.5                 | 39           | 10.6                | 29.7                | 10.6                 | 2337                  | 50                 | 700           |
|            | 275/55R20 | 117V       | XL      | BSW      | 244210       | 7.5-(8.5)-9.5                  | 43           | 11.2                | 31.8                | 10.9                 | 2833                  | 50                 | 653           |
|            | 285/50R20 | 116V       | XL      | BSW      | 244250       | 8.0-(9.0)-10.0                 | 43           | 11.2                | 31.2                | 11.4                 | 2756                  | 50                 | 665           |
|            | 295/40R20 | 106V       | SL      | BSW      | 244330       | 10.0-(10.5)-11.5               | 39           | 10.8                | 29.3                | 11.7                 | 2094                  | 51                 | 710           |
|            | 295/45R20 | 114V       | XL      | BSW      | 244300       | 9.5-(10.0)-11.0                | 40           | 10.8                | 30.4                | 11.6                 | 2601                  | 50                 | 683           |
|            | 305/50R20 | 120V       | XL      | BSW      | 244260       | 8.5-(9.5)-11.0                 | 47           | 11.5                | 32.0                | 12.1                 | 3086                  | 50                 | 649           |
|            | 315/35R20 | 110W       | XL      | BSW      | 244540       | 10.5-(11.0)-12.5               | 37           | 11.1                | 28.6                | 12.2                 | 2337                  | 50                 | 726           |
| 22         | 265/35R22 | 102W       | XL      | BSW      | 244410       | 9.0-(9.5)-10.5                 | 33           | 10.5                | 29.3                | 10.5                 | 1874                  | 50                 | 709           |
|            | 265/40R22 | 106V       | XL      | BSW      | 244390       | 9.0-(9.5)-10.5                 | 37           | 10.5                | 30.3                | 10.5                 | 2094                  | 50                 | 686           |
|            | 265/45R22 | 109V       | XL      | BSW      | 244360       | 8.5-(9.0)-10.0                 | 37           | 10.5                | 31.4                | 10.3                 | 2271                  | 50                 | 661           |
|            | 285/35R22 | 106W       | XL      | BSW      | 244420       | 9.5-(10.0)-11.0                | 37           | 10.7                | 29.8                | 11.2                 | 2094                  | 50                 | 698           |
|            | 285/40R22 | 110V       | XL      | BSW      | 244500       | 9.5-(10.0)-11.0                | 41           | 10.7                | 31.0                | 11.1                 | 2337                  | 50                 | 669           |
|            | 285/45R22 | 114V       | XL      | BSW      | 244370       | 9.0-(9.5)-10.5                 | 42           | 10.7                | 32.0                | 11.1                 | 2601                  | 50                 | 648           |
|            | 305/40R22 | 114V       | XL      | BSW      | 244510       | 10.0-(11.0)-12.0               | 44           | 11.0                | 31.6                | 12.1                 | 2601                  | 50                 | 657           |
| 23         | 305/45R22 | 118V       | XL      | BSW      | 244380       | 9.5-(10.0)-11.5                | 44           | 11.0                | 32.8                | 11.8                 | 2910                  | 50                 | 634           |
|            | 305/40R23 | 115V       | XL      | BSW      | 244440       | 10.0-(11.0)-12.0               | 44           | 11.0                | 32.5                | 12.2                 | 2679                  | 50                 | 639           |
|            | 285/40R24 | 112V       | XL      | BSW      | 244470       | 9.5-(10.0)-11.0                | 43           | 10.7                | 32.9                | 11.7                 | 2469                  | 50                 | 631           |
|            | 295/30R24 | 105V       | XL      | BSW      | 244490       | 10.0-(10.5)-11.0               | 39           | 10.8                | 31.0                | 11.1                 | 2039                  | 50                 | 670           |
| 24         | 305/35R24 | 112V       | XL      | BSW      | 244480       | 10.0-(11.0)-12.0               | 44           | 11.0                | 32.4                | 12.1                 | 2469                  | 50                 | 640           |

Speed Rated "V" = 149mph, "W" = 168mph, "Y" = 186mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



STREET/SPORT TRUCK ALL-SEASON TIRE

This low-profile, high-performance tire offers great value in a wide range of weather and road conditions. The Proxes S/T gives sport trucks, SUVs, and CUVs stability and all-season handling plus high performance, long tread life, and a smooth ride.

POPULAR FITMENTS

Cadillac Escalade  
Chevrolet Tahoe  
Infiniti Q-Series  
Land Rover  
Range Rover  
Porsche Cayenne  
Toyota Sequoia

UTQG

420 A A

ALL-SEASON TREAD COMPOUND AND DESIGN

- Provides balanced wet, dry, and light snow performance.
- Contributes to exceptional tread life.

DOUBLE “V-SHAPED” TREAD GROOVES

- Evacuates water for good all-season performance.

REINFORCED CONSTRUCTION

- Provides higher maximum load capacity.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX LOAD (LBS) DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|-----------------------|---------------------|--------------------|---------------|
| 20         | 265/50R20 | 111V       | RD      | BSW      | 242330       | 7.5-(8.5)-9.5                  | 39           | 11.3                | 30.4                | 11.0                 | 2403                  | -                   | 50                 | 683           |
|            | 275/40R20 | 106W       | RD      | BSW      | 242740       | 9.0-(9.5)-11.0                 | 34           | 10.6                | 28.6                | 10.8                 | 2094                  | -                   | 50                 | 727           |
|            | 275/45R20 | 110V       | RD      | BSW      | 242790       | 8.5-(9.0)-10.5                 | 34           | 10.7                | 29.8                | 10.6                 | 2337                  | -                   | 50                 | 698           |
|            | 275/55R20 | 117V       | RD      | BSW      | 242800       | 7.5-(8.5)-9.5                  | 42           | 11.2                | 31.9                | 11.0                 | 2833                  | -                   | 50                 | 652           |
|            | 285/50R20 | 116V       | RD      | BSW      | 242710       | 8.0-(9.0)-10.0                 | 42           | 10.8                | 31.1                | 11.6                 | 2756                  | -                   | 50                 | 669           |
|            | 295/45R20 | 114V       | RD      | BSW      | 242320       | 9.5-(10.0)-11.0                | 40           | 11.0                | 30.5                | 11.7                 | 2601                  | -                   | 50                 | 683           |
|            | 305/50R20 | 120V       | RD      | BSW      | 242350       | 8.5-(9.5)-11.0                 | 45           | 11.5                | 32.1                | 12.4                 | 3086                  | -                   | 50                 | 648           |
| 22         | 265/35R22 | 102W       | RD      | BSW      | 242760       | 9.0-(9.5)-10.5                 | 34           | 10.5                | 29.3                | 10.4                 | 1874                  | -                   | 50                 | 708           |
|            | 265/40R22 | 106V       | RD      | BSW      | 242460       | 9.0-(9.5)-10.5                 | 45           | 10.5                | 30.4                | 10.7                 | 2094                  | -                   | 50                 | 684           |
|            | 285/45R22 | 114V       | RD      | BSW      | 242690       | 9.0-(9.5)-10.5                 | 42           | 10.8                | 32.2                | 11.2                 | 2601                  | -                   | 50                 | 645           |
|            | 305/40R22 | 114V       | RD      | BSW      | 242390       | 10.0-(10.5)-12.0               | 45           | 11.0                | 31.6                | 12.3                 | 2601                  | -                   | 50                 | 657           |
|            | 305/45R22 | 118V       | RD      | BSW      | 242370       | 9.5-(10.0)-11.5                | 48           | 11.0                | 32.8                | 12.0                 | 2910                  | -                   | 50                 | 636           |
| 24         | 305/35R24 | 112V       | RD      | BSW      | 242820       | 10.0-(11.0)-12.0               | 42           | 11.0                | 32.5                | 12.1                 | 2469                  | -                   | 50                 | 640           |

Speed rated "V" = 149mph, "W" = 168mph. "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



VARIABLE-CONDITIONS TIRE

Toyo Celsius CUV offers year-round versatility plus winter-weather safety in one. This variable-conditions tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire.

POPULAR FITMENTS

Audi Q5  
Ford Edge  
Chevrolet Equinox  
Honda CR-V  
Toyota RAV4  
Subaru Outback

UTQG

500 A A  
520 A A

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for traction on wet and dry roads.

SNOW CLAWS

- Improves deep snow traction.
- Increases block rigidity for better ice and wet traction.

SLUSH GROOVES

- Evacuates slush for increased traction on slush and snow.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on icy, wet, and dry roads.



Mountain Snowflake  
qualified for severe  
snow conditions.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 17         | 225/55R17  | 101V       | XL      | BSW      | 128000       | 6.0-(7.0)-8.0                  | 28           | 11.0                | 26.8                | 9.2                  | 1819           | 50                 | 776           |
|            | 225/60R17  | 99V        | SL      | BSW      | 128020       | 6.0-(6.5)-8.0                  | 28           | 11.1                | 27.6                | 9.0                  | 1709           | 51                 | 752           |
|            | 225/65R17  | 102H       | SL      | BSW      | 128040       | 6.0-(6.5)-8.0                  | 31           | 11.2                | 28.5                | 9.0                  | 1874           | 51                 | 729           |
|            | 235/55R17  | 103V       | XL      | BSW      | 128010       | 6.5-(7.5)-8.5                  | 31           | 11.1                | 27.2                | 9.6                  | 1929           | 50                 | 765           |
|            | 235/60R17  | 102H       | SL      | BSW      | 128030       | 6.5-(7.0)-8.5                  | 31           | 11.2                | 28.1                | 9.4                  | 1874           | 51                 | 739           |
|            | 235/65R17  | 108V       | XL      | BSW      | 128050       | 6.5-(7.0)-8.5                  | 33           | 11.3                | 29.1                | 9.4                  | 2205           | 50                 | 715           |
|            | P245/65R17 | 105H       | SL      | BSW      | 128060       | (7.0)-8.5                      | 33           | 11.3                | 29.5                | 9.8                  | 2039           | 51                 | 704           |
| 18         | 235/55R18  | 100V       | SL      | BSW      | 128070       | 6.5-(7.5)-8.5                  | 31           | 11.1                | 28.1                | 9.6                  | 1764           | 51                 | 738           |
|            | 235/60R18  | 107V       | XL      | BSW      | 128090       | 6.5-(7.0)-8.5                  | 33           | 11.2                | 29.1                | 9.4                  | 2149           | 50                 | 714           |
|            | P235/65R18 | 104H       | SL      | BSW      | 128120       | 6.5-(7.0)-8.5                  | 32           | 11.3                | 30.0                | 9.4                  | 1984           | 51                 | 692           |
|            | 245/60R18  | 105H       | SL      | BSW      | 128100       | (7.0)-8.5                      | 33           | 11.3                | 29.6                | 9.8                  | 2039           | 51                 | 703           |
|            | 255/55R18  | 109V       | XL      | BSW      | 128080       | 7.0-(8.0)-9.0                  | 36           | 11.3                | 29.0                | 10.4                 | 2271           | 50                 | 716           |
|            | P255/65R18 | 109H       | SL      | BSW      | 128130       | 7.0-(7.5)-9.0                  | 38           | 11.3                | 31.1                | 10.2                 | 2271           | 51                 | 669           |
|            | 265/60R18  | 110V       | SL      | BSW      | 128110       | 7.5-(8.0)-9.5                  | 40           | 11.3                | 30.5                | 10.7                 | 2337           | 51                 | 681           |
| 19         | 235/50R19  | 99H        | SL      | BSW      | 128140       | 6.5-(7.5)-8.5                  | 32           | 11.1                | 28.3                | 9.6                  | 1709           | 51                 | 734           |
|            | 235/55R19  | 105V       | XL      | BSW      | 128170       | 6.5-(7.5)-8.5                  | 33           | 11.1                | 29.2                | 9.6                  | 2039           | 50                 | 712           |
|            | P245/55R19 | 103H       | SL      | BSW      | 128180       | 7.0-(7.5)-8.5                  | 34           | 11.2                | 29.6                | 10.0                 | 1929           | 51                 | 701           |
|            | 255/50R19  | 107V       | XL      | BSW      | 128150       | 7.0-(8.0)-9.0                  | 35           | 11.3                | 29.1                | 10.4                 | 2149           | 50                 | 714           |
|            | P255/60R19 | 108H       | SL      | BSW      | 128200       | 7.0-(7.5)-9.0                  | 40           | 11.3                | 31.1                | 10.2                 | 2205           | 51                 | 669           |
|            | 265/50R19  | 110H       | XL      | BSW      | 128160       | 7.5-(8.5)-9.5                  | 37           | 11.3                | 29.5                | 10.9                 | 2337           | 50                 | 704           |
|            | 275/55R19  | 111V       | SL      | BSW      | 128190       | 7.5-(8.5)-9.5                  | 40           | 11.3                | 30.9                | 11.2                 | 2403           | 51                 | 672           |
| 20         | P235/55R20 | 102H       | SL      | BSW      | 128230       | 6.5-(7.5)-8.5                  | 32           | 11.1                | 30.2                | 9.6                  | 1874           | 51                 | 689           |
|            | P245/50R20 | 102V       | SL      | BSW      | 128210       | 7.0-(7.5)-8.5                  | 34           | 11.2                | 29.7                | 10.0                 | 1874           | 51                 | 700           |
|            | 265/50R20  | 107V       | SL      | BSW      | 128220       | 7.5-(8.5)-9.5                  | 38           | 11.3                | 30.5                | 10.9                 | 2149           | 51                 | 682           |

Speed rated "H" = 130mph, "V" = 149mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



ON-/OFF-ROAD COMMERCIAL GRADE TIRE

The Open Country C/T boasts all-terrain commercial grade durability, plus a Three-Peak Mountain Snowflake qualifies it for severe snow conditions. Developed for balanced on- and off-road work, its unique tread design and tough construction deliver long tread life and traction in gravel, mud, and snow. Contrary to its aggressive appearance, the Open Country C/T also provides a quiet, comfortable highway ride.

POPULAR FITMENTS

Chevrolet Silverado  
Ford F-Series  
Ram Series  
Toyota Tundra  
Nissan Titan



Mountain Snowflake  
qualified for severe  
snow conditions.

HIGH TURN-UP, 3-PLY  
POLYESTER CONSTRUCTION

- Contributes to excellent durability, impact resistance, and handling.

BALANCED TREAD COMPOUND

- Helps resist cutting, chipping, and stone drilling while remaining flexible in lower temperatures.
- Extends tire life and provides dependable year round service.

DUAL-ANGLE SHOULDER BLOCKS

- Enhances traction in snow, mud, and rutted road conditions.

OPEN SHOULDER DESIGN

- Helps provide traction in mild mud, slush, and snow.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in ice traction.



| WHEEL DIA. | TIRE SIZE     | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX LOAD (LBS) DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|---------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|-----------------------|---------------------|--------------------|---------------|
| 16         | LT245/75R16   | 120/116Q   | E       | BSW      | 345050       | 6.5-(7.0)-8.0                  | 51           | 18.3                | 30.7                | 9.8                  | 3042                  | 2778                | 80                 | 676           |
|            | LT235/80R17   | 120/117Q   | E       | BSW      | 345090       | 6.0-(6.5)-7.5                  | 53           | 18.3                | 32.0                | 9.3                  | 3085                  | 2835                | 80                 | 648           |
|            | LT245/70R17   | 119/116Q   | E       | BSW      | 345070       | 6.5-(7.0)-8.0                  | 51           | 18.3                | 30.8                | 9.8                  | 3000                  | 2755                | 80                 | 675           |
| 17         | LT245/75R17   | 121/118Q   | E       | BSW      | 345030       | 6.5-(7.0)-7.5                  | 54           | 18.3                | 31.7                | 9.8                  | 3195                  | 2910                | 80                 | 655           |
|            | LT265/70R17   | 121/118Q   | E       | BSW      | 345010       | 7.0-(8.0)-8.5                  | 56           | 18.4                | 31.9                | 10.7                 | 3195                  | 2910                | 80                 | 651           |
|            | LT285/70R17   | 121/118Q   | E       | BSW      | 345000       | 7.5-(8.5)-9.0                  | 61           | 18.4                | 33.0                | 11.5                 | 3195                  | 2910                | 80                 | 630           |
|            | 35X12.50R17LT | 121Q       | E       | BSW      | 345120       | 8.5-(10.0)-11.0                | 77           | 19.3                | 34.8                | 12.5                 | 3195                  | -                   | 65                 | 598           |
|            | LT265/70R18   | 124/121Q   | E       | BSW      | 345060       | 7.0-(8.0)-9.0                  | 57           | 18.4                | 32.9                | 10.7                 | 3525                  | 3195                | 80                 | 632           |
| 18         | LT275/65R18   | 123/120Q   | E       | BSW      | 345040       | 7.5-(8.0)-9.0                  | 59           | 18.4                | 32.3                | 11.0                 | 3415                  | 3085                | 80                 | 643           |
|            | LT275/70R18   | 125/122Q   | E       | BSW      | 345020       | 7.0-(8.0)-8.5                  | 62           | 18.4                | 33.4                | 11.0                 | 3640                  | 3305                | 80                 | 621           |
|            | 35X12.50R18LT | 123Q       | E       | BSW      | 345130       | 8.5-(10.0)-11.0                | 79           | 19.3                | 34.8                | 12.5                 | 3415                  | -                   | 65                 | 598           |
|            | LT265/60R20   | 121/118Q   | E       | BSW      | 345110       | 7.5-(8.0)-9.5                  | 61           | 18.4                | 32.8                | 10.7                 | 3195                  | 2910                | 80                 | 634           |
| 20         | LT275/55R20   | 115/112Q   | D       | BSW      | 345100       | 7.5-(8.5)-9.5                  | 62           | 18.4                | 32.1                | 11.2                 | 2680                  | 2470                | 65                 | 647           |
|            | LT275/65R20   | 126/123Q   | E       | BSW      | 345080       | 7.5-(8.0)-9.5                  | 65           | 18.4                | 34.3                | 11.0                 | 3750                  | 3415                | 80                 | 605           |
|            | LT285/55R20   | 122/119Q   | E       | BSW      | 345150       | 8.0-(9.0)-10.0                 | 65           | 18.4                | 32.6                | 11.7                 | 3305                  | 3000                | 80                 | 637           |
|            | 35X12.50R20LT | 121Q       | E       | BSW      | 345140       | 8.5-(10.0)-11.0                | 73           | 19.3                | 34.8                | 12.5                 | 3195                  | -                   | 65                 | 598           |



Speed rated "Q" = 99 mph, "D" = 8-ply rating, "E" = 10-ply rating, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



ON-/OFF-ROAD COMMERCIAL TRACTION TIRE

The iconic M-55 might be the hardest-working member of your crew. This commercial grade tire was built to handle the toughest of off-road jobs through snow, mud, and rough terrain. Its extreme durability and long tread life provide heavy-duty truck owners with dependable year round service.

POPULAR FITMENTS

Chevrolet Silverado 2500  
Ram Series  
Ford F-250/F-350  
Ford E-Series

AGGRESSIVE LUG AND BLOCK TREAD DESIGN

- Provides solid handling and traction.

OPEN SHOULDER DESIGN

- Maximizes water evacuation for excellent all-terrain traction and stability.

AGGRESSIVE SIPING

- Improves wet and snow traction.

PINNED FOR STUDS

- Able to accept TSMI #15 studs to aid in snow traction.



| WHEEL DIA. | TIRE SIZE   | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX LOAD (LBS) DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|-----------------------|---------------------|--------------------|---------------|
| 15         | LT215/75R15 | 100/97M    | C       | BSW      | 309160       | 5.5-(6.0)-7.0                  | 31           | 17.0                | 27.7                | 8.5                  | 1765                  | 1610                | 50                 | 751           |
|            | LT215/75R15 | 100/97Q    | C       | BSW      | 309290       | 5.5-(6.0)-7.0                  | 30           | 17.0                | 27.7                | 8.5                  | 1765                  | 1610                | 50                 | 751           |
|            | LT235/75R15 | 104/101M   | C       | BSW      | 309200       | 6.0-(6.5)-7.0                  | 35           | 17.6                | 28.9                | 9.3                  | 1985                  | 1820                | 50                 | 720           |
|            | LT235/75R15 | 104/101Q   | C       | BSW      | 309270       | 6.0-(6.5)-7.0                  | 37           | 17.6                | 28.9                | 9.3                  | 1985                  | 1820                | 50                 | 720           |
|            | LT215/85R16 | 115/112Q   | E       | BSW      | 309020       | 5.5-(6.0)-7.0                  | 44           | 17.0                | 30.7                | 8.7                  | 2680                  | 2470                | 80                 | 676           |
|            | LT225/75R16 | 115/112N   | E       | BSW      | 309410       | (6.0)-7.0                      | 39           | 16.9                | 29.4                | 8.5                  | 2680                  | 2470                | 80                 | 706           |
| 16         | LT225/75R16 | 115/112Q   | E       | BSW      | 309000       | (6.0)-7.0                      | 40           | 17.0                | 29.4                | 8.7                  | 2680                  | 2470                | 80                 | 705           |
|            | LT235/85R16 | 120/116N   | E       | BSW      | 309460       | 6.0-(6.5)-7.5                  | 49           | 17.5                | 32.0                | 9.3                  | 3042                  | 2778                | 80                 | 649           |
|            | LT235/85R16 | 120/116Q   | E       | BSW      | 309220       | 6.0-(6.5)-7.5                  | 49           | 17.5                | 32.0                | 9.3                  | 3042                  | 2770                | 80                 | 650           |
|            | LT245/75R16 | 120/116N   | E       | BSW      | 309420       | 6.5-(7.0)-8.0                  | 46           | 17.5                | 30.7                | 9.8                  | 3042                  | 2778                | 80                 | 675           |
|            | LT245/75R16 | 120/116Q   | E       | BSW      | 312150       | 6.5-(7.0)-8.0                  | 46           | 17.5                | 30.8                | 9.8                  | 3042                  | 2778                | 80                 | 675           |
|            | LT255/85R16 | 123/120Q   | E       | BSW      | 309100       | 6.5-(7.0)-8.0                  | 59           | 18.1                | 33.4                | 10.4                 | 3415                  | 3085                | 80                 | 622           |
|            | LT265/75R16 | 123/120Q   | E       | BSW      | 309070       | 7.0-(7.5)-8.0                  | 58           | 18.3                | 32.0                | 10.8                 | 3415                  | 3085                | 80                 | 649           |
|            | LT285/75R16 | 126/123Q   | E       | BSW      | 312130       | 7.5-(8.0)-9.0                  | 60           | 18.9                | 33.2                | 11.2                 | 3740                  | 3415                | 80                 | 626           |
|            | LT235/80R17 | 120/117N   | E       | BSW      | 309490       | 6.0-(6.5)-7.5                  | 49           | 17.5                | 31.9                | 9.3                  | 3085                  | 2835                | 80                 | 651           |
|            | LT235/80R17 | 120/117Q   | E       | BSW      | 312060       | 6.0-(6.5)-7.5                  | 49           | 17.6                | 32.0                | 9.3                  | 3085                  | 2835                | 80                 | 649           |
| 17         | LT245/75R17 | 121/118Q   | E       | BSW      | 309050       | 6.5-(7.0)-7.5                  | 49           | 17.6                | 31.9                | 9.7                  | 3195                  | 2910                | 80                 | 651           |
|            | LT265/70R17 | 121/118Q   | E       | BSW      | 309190       | 7.0-(8.0)-8.5                  | 53           | 18.3                | 32.0                | 10.6                 | 3195                  | 2910                | 80                 | 648           |
|            | LT285/70R17 | 121/118Q   | E       | BSW      | 301750       | 7.5-(8.5)-9.0                  | 53           | 18.9                | 33.1                | 11.4                 | 3195                  | 2910                | 80                 | 627           |
|            | LT265/70R18 | 124/121Q   | E       | BSW      | 309310       | 7.0-(8.0)-9.0                  | 57           | 18.3                | 33.0                | 10.6                 | 3525                  | 3195                | 80                 | 629           |
| 18         | LT275/65R18 | 123/120Q   | E       | BSW      | 309300       | 7.5-(8.0)-9.0                  | 57           | 18.9                | 32.4                | 11.0                 | 3415                  | 3085                | 80                 | 640           |
|            | LT275/70R18 | 125/122Q   | E       | BSW      | 310270       | 7.0-(8.0)-8.5                  | 60           | 18.8                | 33.6                | 11.0                 | 3640                  | 3305                | 80                 | 619           |

Speed rated "Q" = 99mph, "M" = 81mph, "N" = 87 mph, "C" = 6-ply rating, "E" = 10-ply rating.  
"BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



SPORTS CAR / COMPETITION

PROVEN



SPORTS CAR

PROXES 1



MAX PERFORMANCE  
SUMMER

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 5.0 |
| WET HANDLING       | 5.0 |
| RIDE COMFORT       | 3.5 |
| QUIET RIDE         | 4.5 |
| TREAD LIFE         | 2.5 |
| WINTER HANDLING    | N/A |
| ROLLING RESISTANCE | 3.0 |

**UTQG**  
240 AA A

VEHICLE & APPLICATION SEGMENT

Sports Cars  
Direct OE Replacement

**SPEED RATING**  
[Y]

**WHEEL DIAMETER**  
18"-19"

PROXES R1R



EXTREME PERFORMANCE  
SUMMER

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 5.0 |
| WET HANDLING       | 5.0 |
| RIDE COMFORT       | 3.0 |
| QUIET RIDE         | 3.0 |
| TREAD LIFE         | 2.0 |
| WINTER HANDLING    | N/A |
| ROLLING RESISTANCE | 2.0 |

**UTQG**  
200 AA A

VEHICLE & APPLICATION SEGMENT

Sports Cars  
Autocross  
Direct OE Replacement  
Plus Sizing

**SPEED RATING**  
V-W

**WHEEL DIAMETER**  
15"-16"-17"-18"

PROXES T1 SPORT



ULTRA-HIGH PERFORMANCE  
SUMMER

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 4.5 |
| WET HANDLING       | 5.0 |
| RIDE COMFORT       | 3.0 |
| QUIET RIDE         | 4.5 |
| TREAD LIFE         | 3.0 |
| WINTER HANDLING    | N/A |
| ROLLING RESISTANCE | 3.0 |

**UTQG**  
240 AA A

VEHICLE & APPLICATION SEGMENT

Sports Cars  
Luxury Sedans  
Direct OE Replacement  
Plus Sizing

**SPEED RATING**  
Y-[Y]

**WHEEL DIAMETER**  
17"-18"-19"-20"

PROXES T1R



ULTRA-HIGH PERFORMANCE  
SUMMER

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 4.0 |
| WET HANDLING       | 4.5 |
| RIDE COMFORT       | 3.0 |
| QUIET RIDE         | 3.0 |
| TREAD LIFE         | 3.0 |
| WINTER HANDLING    | N/A |
| ROLLING RESISTANCE | 3.0 |

**UTQG**  
280 AA A

VEHICLE & APPLICATION SEGMENT

Plus Sizing

**SPEED RATING**  
V-W-Y

**WHEEL DIAMETER**  
15"-16"-19"-20"-21"-22"

PROXES 4 PLUS



ULTRA-HIGH PERFORMANCE  
ALL-SEASON

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 4.0 |
| WET HANDLING       | 4.5 |
| RIDE COMFORT       | 4.0 |
| QUIET RIDE         | 4.5 |
| TREAD LIFE         | 4.0 |
| WINTER HANDLING    | 3.0 |
| ROLLING RESISTANCE | 3.0 |

**UTQG**  
560 A A

VEHICLE & APPLICATION SEGMENT

Sports Cars  
Luxury Sedans  
Direct OE Replacement  
Plus Sizing

**SPEED RATING**  
V-W-Y

**WHEEL DIAMETER**  
16"-17"-18"-19"-20"

SPORTS CAR:

These high performance tires are built for spirited driving. Advanced technologies in compounds and design deliver exceptional wet and dry handling, high-speed stability, and longer tread life. If that isn't enough, most of these tires are backed by our risk-free No Regrets Trial Offer.





MAX PERFORMANCE SUMMER TIRE

Built for many of the most powerful cars in the world, this max performance summer tire is the flagship for our legendary Proxes line of high performance products. The Proxes 1 is also our most technologically advanced tire, developed with a focus on high-speed performance, cornering, and braking.

POPULAR FITMENTS

BMW M3  
BMW M5  
Chevrolet Corvette  
Porsche Cayman S  
Porsche 911 Carrera Turbo

UTQG

240 AA A

TRUFORM™ TECHNOLOGY

- Reduces tread deformation for better steering response and high-speed stability.
- Improves handling performance.

MULTI-COMPOUND TREAD

- Outside: Engineered for cornering performance.
- Inside: Engineered for braking performance.

UNIQUE TREAD COMPOUND AND DESIGN: REAR SIZES (285 AND WIDER)

- Improves cornering power.
- Improves vehicle balance.

MULTI-FUNCTION TAPER

- Obtains uniform contact pressure during cornering.
- Provides a wide water channel for better hydroplaning resistance.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 18         | 235/40R18 | (91Y)      | SL      | BSW      | 100500       | 8.0- <b>(8.5)</b> -9.5         | 25           | 9.7                 | 25.4                | 9.7                  | 1356           | 51                 | 817           |
|            | 245/40R18 | (93Y)      | SL      | BSW      | 100580       | 8.0- <b>(8.5)</b> -9.5         | 26           | 9.7                 | 25.7                | 9.8                  | 1433           | 51                 | 808           |
|            | 265/40R18 | (101Y)     | XL      | BSW      | 100510       | 9.0- <b>(9.5)</b> -10.5        | 29           | 9.7                 | 26.3                | 10.8                 | 1819           | 50                 | 789           |
|            | 295/35R18 | (99Y)      | SL      | BSW      | 100520       | 10.0- <b>(10.5)</b> -11.5      | 32           | 9.1                 | 26.2                | 11.9                 | 1709           | 51                 | 793           |
| 19         | 235/35R19 | (87Y)      | SL      | BSW      | 100540       | 8.0- <b>(8.5)</b> -9.5         | 25           | 9.7                 | 25.6                | 9.7                  | 1201           | 51                 | 813           |
|            | 255/35R19 | (96Y)      | XL      | BSW      | 100590       | 8.5- <b>(9.0)</b> -10.0        | 27           | 9.7                 | 26.1                | 10.2                 | 1565           | 50                 | 796           |
|            | 255/40R19 | (96Y)      | SL      | BSW      | 100530       | 8.5- <b>(9.0)</b> -10.0        | 29           | 9.7                 | 27.1                | 10.2                 | 1565           | 51                 | 767           |
|            | 285/35R19 | (99Y)      | SL      | BSW      | 100550       | 9.5- <b>(10.0)</b> -11.0       | 32           | 9.1                 | 26.9                | 11.5                 | 1709           | 51                 | 773           |
|            | 295/30R19 | (100Y)     | XL      | BSW      | 100560       | 10.0- <b>(10.5)</b> -11.0      | 31           | 9.1                 | 26.1                | 12.0                 | 1764           | 50                 | 796           |
|            | 305/30R19 | (102Y)     | XL      | BSW      | 100570       | 10.5- <b>(11.0)</b> -11.5      | 33           | 9.1                 | 26.3                | 12.3                 | 1874           | 50                 | 790           |

Speed rated "Y" = 195mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



EXTREME PERFORMANCE SUMMER TIRE

Years of grueling on-track experience and advanced engineering shine through in this extreme-performance summer tire. The Proxes R1R helps you drive hard through the corners and quickly accelerate in the straightaways. Features include an aggressive, arrowhead tread design; extra wide footprint; high-grip compound; and autocross-inspired casing design.

POPULAR FITMENTS

BMW 3-Series  
Honda S2000  
Porsche Boxster  
Subaru WRX STi  
Mitsubishi Lancer Evolution

UTQG

200 AA A

SILICA-REINFORCED,  
HIGH-GRIP TREAD COMPOUND

- Improves grip for better handling performance during high-spirited driving.

TAPERED CENTER BLOCK EDGE

- Stabilizes center block movement to decrease irregular wear.
- Helps to increase hydroplaning resistance.

ADVANCED AUTOCROSS-  
INSPIRED CASING WITH MODIFIED  
RADIAL CONSTRUCTION

- Improves steering response and handling.

STABILITY CONTROL SLITS

- Provides resistance to irregular wear.
- Improves dry performance by maintaining block stiffness during aggressive braking.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 195/50R15  | 82V        | SL      | BSW      | 170100       | 5.5-(6.0)-7.0                  | 19.6         | 8.2                 | 22.8                | 7.8                  | 1047           | 51                 | 910           |
|            | 195/50R15  | 82V        | SL      | BSW      | 173370       | 5.5-(6.0)-7.0                  | 19.6         | 8.2                 | 22.8                | 7.8                  | 1047           | 51                 | 910           |
|            | 195/55R15  | 85V        | SL      | BSW      | 173260       | 5.5-(6.0)-7.0                  | 20.3         | 8.4                 | 23.5                | 8.1                  | 1135           | 51                 | 883           |
|            | 195/55R15  | 85V        | SL      | BSW      | 170270       | 5.5-(6.0)-7.0                  | 20.3         | 8.4                 | 23.5                | 8.1                  | 1135           | 51                 | 883           |
|            | 205/50R15  | 86V        | SL      | BSW      | 173330       | 5.5-(6.5)-7.5                  | 20.4         | 8.2                 | 23.0                | 8.5                  | 1168           | 51                 | 903           |
|            | 225/45ZR15 | 87W        | SL      | BSW      | 173280       | 7.0-(7.5)-8.5                  | 22.1         | 8.1                 | 23.0                | 8.9                  | 1201           | 51                 | 905           |
| 16         | 205/45R16  | 83W        | SL      | BSW      | 173360       | 6.5-(7.0)-7.5                  | 18.9         | 8.2                 | 23.2                | 8.1                  | 1074           | 51                 | 894           |
|            | 205/45R16  | 83W        | SL      | BSW      | 170040       | 6.5-(7.0)-7.5                  | 18.9         | 8.2                 | 23.2                | 8.1                  | 1074           | 51                 | 894           |
|            | 205/50R16  | 87V        | SL      | BSW      | 170260       | 5.5-(6.5)-7.5                  | 21.8         | 8.6                 | 24.3                | 8.4                  | 1201           | 51                 | 856           |
|            | 205/50R16  | 87V        | SL      | BSW      | 173350       | 5.5-(6.5)-7.5                  | 21.8         | 8.6                 | 24.3                | 8.4                  | 1201           | 51                 | 856           |
|            | 205/55R16  | 91V        | SL      | BSW      | 145020       | 5.5-(6.5)-7.5                  | 22           | 8.6                 | 24.8                | 8.1                  | 1356           | 51                 | 838           |
|            | 225/45ZR16 | 89W        | SL      | BSW      | 145040       | 7.0-(7.5)-8.5                  | 22.5         | 8.1                 | 23.9                | 9.0                  | 1279           | 51                 | 871           |
|            | 225/50R16  | 92V        | SL      | BSW      | 145010       | 6.0-(7.0)-8.0                  | 22.9         | 8.8                 | 24.8                | 9.0                  | 1389           | 51                 | 838           |
|            | 225/50R16  | 92V        | SL      | BSW      | 170250       | 6.0-(7.0)-8.0                  | 22.9         | 8.8                 | 24.8                | 9.0                  | 1389           | 51                 | 838           |
| 17         | 215/45ZR17 | 87W        | SL      | BSW      | 173340       | (7.0)-8.0                      | 21.8         | 7.9                 | 24.5                | 8.3                  | 1201           | 51                 | 847           |
|            | 225/45ZR17 | 91W        | SL      | BSW      | 145070       | 7.0-(7.5)-8.5                  | 23.8         | 8.1                 | 25.0                | 8.9                  | 1356           | 51                 | 832           |
|            | 235/40ZR17 | 90W        | SL      | BSW      | 170090       | 8.0-(8.5)-9.5                  | 23.8         | 8.2                 | 24.4                | 9.4                  | 1323           | 51                 | 850           |
|            | 235/40ZR17 | 90W        | SL      | BSW      | 173210       | 8.0-(8.5)-9.5                  | 23.8         | 8.2                 | 24.4                | 9.4                  | 1323           | 51                 | 850           |
|            | 235/45ZR17 | 94W        | SL      | BSW      | 145050       | 7.5-(8.0)-9.0                  | 23.6         | 8.2                 | 25.3                | 9.4                  | 1477           | 51                 | 820           |
|            | 235/45ZR17 | 94W        | SL      | BSW      | 170170       | 7.5-(8.0)-9.0                  | 23.6         | 8.2                 | 25.3                | 9.4                  | 1477           | 51                 | 820           |
|            | 245/35ZR17 | 91W        | XL      | BSW      | 173220       | 8.0-(8.5)-9.5                  | 23.6         | 8.2                 | 23.8                | 9.7                  | 1356           | 50                 | 872           |
|            | 245/40ZR17 | 91W        | SL      | BSW      | 173240       | 8.0-(8.5)-9.5                  | 23.5         | 8.2                 | 24.7                | 9.8                  | 1356           | 51                 | 840           |
|            | 245/40ZR17 | 91W        | SL      | BSW      | 170160       | 8.0-(8.5)-9.5                  | 23.5         | 8.2                 | 24.7                | 9.8                  | 1356           | 51                 | 840           |
|            | 245/45ZR17 | 95W        | SL      | BSW      | 145080       | 7.5-(8.0)-9.0                  | 28           | 8.2                 | 26.0                | 9.7                  | 1521           | 51                 | 799           |
|            | 255/40ZR17 | 94W        | SL      | BSW      | 145060       | 8.5-(9.0)-10.0                 | 26.4         | 8.2                 | 25.2                | 10.3                 | 1477           | 51                 | 825           |
|            | 255/40ZR17 | 94W        | SL      | BSW      | 170150       | 8.5-(9.0)-10.0                 | 26.4         | 8.2                 | 25.2                | 10.3                 | 1477           | 51                 | 825           |
|            | 275/40ZR17 | 98W        | SL      | BSW      | 145110       | 9.0-(9.5)-11.0                 | 26.5         | 8.2                 | 25.6                | 10.8                 | 1653           | 51                 | 811           |
|            | 225/40ZR18 | 88W        | SL      | BSW      | 173190       | 7.5-(8.0)-9.0                  | 23           | 8.2                 | 25.0                | 9.0                  | 1235           | 51                 | 830           |
|            | 245/40ZR18 | 93W        | SL      | BSW      | 173250       | 8.0-(8.5)-9.5                  | 25           | 8.2                 | 26.0                | 9.6                  | 1433           | 51                 | 800           |
|            | 255/35ZR18 | 90W        | SL      | BSW      | 145090       | 8.5-(9.0)-10.0                 | 23.6         | 8.2                 | 25.1                | 10.1                 | 1323           | 51                 | 828           |
| 18         | 265/35ZR18 | 93W        | SL      | BSW      | 170070       | 9.0-(9.5)-10.5                 | 26.3         | 8.2                 | 25.4                | 10.6                 | 1433           | 51                 | 817           |
|            | 265/35ZR18 | 93W        | SL      | BSW      | 173230       | 9.0-(9.5)-10.5                 | 26.3         | 8.2                 | 25.4                | 10.6                 | 1433           | 51                 | 817           |

Speed rated "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



ULTRA-HIGH PERFORMANCE SUMMER TIRE

The Proxes T1 Sport delivers increased control and precision for true balance in both wet and dry handling. State-of-the-art design and construction provide the perfect mix of high-speed stability and cornering power, precise steering response, and quick braking on wet or dry pavement.

POPULAR FITMENTS

BMW 1-Series  
BMW Z4  
Ford Mustang GT  
Infiniti G37  
Nissan 370Z

UTQG

240 AA A

OUTSIDE TREAD: WIDER AND MORE EVEN CONTACT PRESSURE

- Gives better cornering performance.

INSIDE TREAD: WIDE GROOVES AND RIGID RIB-BASED DESIGN

- Enhances braking performance.
- Helps prevent hydroplaning.

HIGH-STIFFNESS SIDEWALL AND HIGH-HARDNESS BEAD FILLER

- Quicker and more linear steering response as compared to Proxes T1R.

WIDE PROFILE DESIGN

- Improves contact pressure distribution for better cornering and braking performance as compared to Proxes T1R.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 17         | 205/50ZR17 | 93Y        | XL      | BSW      | 252380       | 5.5-(6.5)-7.5                  | 22           | 10.1                | 25.0                | 8.4                  | 1433           | 50                 | 830           |
|            | 225/45ZR17 | 94Y        | XL      | BSW      | 252350       | 7.0-(7.5)-8.5                  | 25           | 10.1                | 24.8                | 9.1                  | 1477           | 50                 | 836           |
|            | 235/40ZR17 | 94Y        | XL      | BSW      | 252300       | 8.0-(8.5)-9.5                  | 23           | 9.6                 | 24.2                | 9.6                  | 1477           | 50                 | 857           |
|            | 235/45ZR17 | 97Y        | XL      | BSW      | 252360       | 7.5-(8.0)-9.0                  | 24           | 10.1                | 25.2                | 9.4                  | 1609           | 50                 | 826           |
|            | 245/40ZR17 | 95Y        | XL      | BSW      | 252310       | 8.0-(8.5)-9.5                  | 24           | 10.1                | 24.6                | 9.8                  | 1521           | 50                 | 844           |
|            | 245/45ZR17 | 99Y        | XL      | BSW      | 252370       | 7.5-(8.0)-9.0                  | 26           | 10.1                | 25.5                | 9.7                  | 1709           | 50                 | 814           |
|            | 255/40ZR17 | 98Y        | XL      | BSW      | 252320       | 8.5-(9.0)-10.0                 | 26           | 10.1                | 24.9                | 10.2                 | 1653           | 50                 | 834           |
|            | 265/40ZR17 | 96Y        | SL      | BSW      | 252330       | 9.0-(9.5)-10.5                 | 26           | 10.1                | 25.2                | 10.7                 | 1565           | 51                 | 826           |
|            | 215/40ZR18 | 89Y        | XL      | BSW      | 252190       | 7.0-(7.5)-8.5                  | 22           | 10.1                | 24.8                | 8.5                  | 1279           | 50                 | 839           |
|            | 215/45ZR18 | 93Y        | XL      | BSW      | 252240       | (7.0)-8.0                      | 22           | 10.1                | 25.5                | 8.5                  | 1433           | 50                 | 816           |
| 18         | 225/40ZR18 | 92Y        | XL      | BSW      | 252200       | 7.5-(8.0)-9.0                  | 24           | 9.6                 | 25.1                | 9.1                  | 1389           | 50                 | 829           |
|            | 225/45ZR18 | (95Y)      | XL      | BSW      | 252250       | 7.0-(7.5)-8.5                  | 24           | 10.1                | 25.9                | 9.0                  | 1521           | 50                 | 803           |
|            | 235/40ZR18 | (95Y)      | XL      | BSW      | 252210       | 8.0-(8.5)-9.5                  | 25           | 9.6                 | 25.2                | 9.6                  | 1521           | 50                 | 823           |
|            | 235/45ZR18 | (98Y)      | XL      | BSW      | 252260       | 7.5-(8.0)-9.0                  | 26           | 10.1                | 26.2                | 9.3                  | 1653           | 50                 | 793           |
|            | 235/50ZR18 | 101Y       | XL      | BSW      | 252290       | 6.5-(7.5)-8.5                  | 29           | 10.1                | 27.2                | 9.7                  | 1819           | 50                 | 765           |
|            | 245/35ZR18 | 92Y        | XL      | BSW      | 252140       | 8.0-(8.5)-9.5                  | 23           | 10.1                | 24.6                | 9.6                  | 1389           | 50                 | 843           |
|            | 245/40ZR18 | 97Y        | XL      | BSW      | 252220       | 8.0-(8.5)-9.5                  | 27           | 9.7                 | 25.7                | 9.7                  | 1609           | 50                 | 809           |
|            | 245/45ZR18 | (100Y)     | XL      | BSW      | 252270       | (8.0)-9.5                      | 28           | 10.1                | 26.6                | 9.7                  | 1764           | 50                 | 782           |
|            | 255/35ZR18 | 94Y        | XL      | BSW      | 252150       | 8.5-(9.0)-10.0                 | 26           | 10.1                | 24.9                | 10.1                 | 1477           | 50                 | 835           |
|            | 255/40ZR18 | (99Y)      | XL      | BSW      | 252230       | 8.5-(9.0)-10.0                 | 27           | 10.1                | 25.9                | 10.2                 | 1709           | 50                 | 802           |
|            | 255/45ZR18 | 103Y       | XL      | BSW      | 252280       | 8.0-(8.5)-9.5                  | 28           | 10.1                | 26.9                | 10.2                 | 1929           | 50                 | 771           |
|            | 265/35ZR18 | (97Y)      | XL      | BSW      | 252160       | 9.0-(9.5)-10.5                 | 24           | 10.1                | 25.3                | 10.6                 | 1609           | 50                 | 821           |
|            | 275/35ZR18 | (95Y)      | SL      | BSW      | 252170       | 9.0-(9.5)-11.0                 | 27           | 10.1                | 25.5                | 10.8                 | 1521           | 51                 | 816           |
|            | 275/40ZR18 | (99Y)      | SL      | BSW      | 252510       | 9.0-(9.5)-11.0                 | 30           | 10.1                | 26.7                | 11.0                 | 1709           | 51                 | 778           |
|            | 285/30ZR18 | 97Y        | XL      | BSW      | 252500       | 9.5-(10.0)-10.5                | 27           | 9.4                 | 24.8                | 11.2                 | 1609           | 50                 | 838           |
|            | 285/35ZR18 | 101Y       | XL      | BSW      | 252180       | 9.5-(10.0)-11.0                | 32           | 9.4                 | 25.7                | 11.6                 | 1819           | 50                 | 807           |
|            | 295/35ZR18 | (103Y)     | XL      | BSW      | 252950       | 10.0-(10.5)-11.5               | 34           | 9.1                 | 26.1                | 11.9                 | 1929           | 50                 | 796           |
|            | 225/35ZR19 | (88Y)      | XL      | BSW      | 252060       | 7.5-(8.0)-9.0                  | 22           | 10.1                | 25.2                | 9.1                  | 1235           | 50                 | 823           |
|            | 225/40ZR19 | 93Y        | XL      | BSW      | 252100       | 7.5-(8.0)-9.0                  | 24           | 10.1                | 26.2                | 9.1                  | 1433           | 50                 | 793           |
|            | 235/35ZR19 | (91Y)      | XL      | BSW      | 252070       | 8.0-(8.5)-9.5                  | 23           | 10.1                | 25.4                | 9.5                  | 1356           | 50                 | 819           |
| 19         | 235/40ZR19 | 96Y        | XL      | BSW      | 252850       | 8.0-(8.5)-9.5                  | 24           | 9.2                 | 26.4                | 9.5                  | 1565           | 50                 | 786           |
|            | 245/35ZR19 | (93Y)      | XL      | BSW      | 252080       | 8.0-(8.5)-9.5                  | 25           | 10.1                | 25.7                | 9.6                  | 1433           | 50                 | 809           |
|            | 245/40ZR19 | (98Y)      | XL      | BSW      | 252110       | 8.0-(8.5)-9.5                  | 27           | 10.1                | 26.6                | 9.8                  | 1653           | 50                 | 781           |
|            | 245/45R19  | 102Y       | XL      | BSW      | 252770       | 7.5-(8.0)-9.0                  | 30           | 9.7                 | 27.7                | 9.6                  | 1874           | 50                 | 751           |
|            | 255/30ZR19 | (91Y)      | XL      | BSW      | 252030       | 8.5-(9.0)-9.5                  | 26           | 10.1                | 25.0                | 10.0                 | 1356           | 50                 | 830           |
|            | 255/35ZR19 | (96Y)      | XL      | BSW      | 252090       | 8.5-(9.0)-10.0                 | 26           | 10.0                | 25.9                | 10.1                 | 1565           | 50                 | 801           |
|            | 255/40ZR19 | 100Y       | XL      | BSW      | 252120       | 8.5-(9.0)-10.0                 | 28           | 10.1                | 26.9                | 10.2                 | 1764           | 50                 | 771           |
|            | 265/30ZR19 | (93Y)      | XL      | BSW      | 252040       | 9.0-(9.5)-10.0                 | 26           | 10.1                | 25.2                | 10.6                 | 1433           | 50                 | 824           |
|            | 265/35ZR19 | (98Y)      | XL      | BSW      | 252470       | 9.0-(9.5)-10.5                 | 27           | 9.2                 | 26.3                | 10.7                 | 1653           | 50                 | 790           |
|            | 275/30ZR19 | (96Y)      | XL      | BSW      | 252530       | 9.0-(9.5)-10.0                 | 26           | 10.1                | 25.6                | 10.6                 | 1565           | 50                 | 810           |
|            | 275/35ZR19 | (100Y)     | XL      | BSW      | 252540       | 9.0-(9.5)-11.0                 | 29           | 10.1                | 26.6                | 10.9                 | 1764           | 50                 | 780           |
|            | 275/40ZR19 | 105Y       | XL      | BSW      | 252840       | 9.0-(9.5)-11.0                 | 31           | 9.7                 | 27.7                | 10.9                 | 2039           | 50                 | 751           |
|            | 285/30ZR19 | (98Y)      | XL      | BSW      | 252520       | 9.5-(10.0)-10.5                | 29           | 9.4                 | 25.8                | 11.3                 | 1653           | 50                 | 806           |
|            | 285/35ZR19 | (99Y)      | SL      | BSW      | 252780       | 9.5-(10.0)-11.0                | 33           | 9.1                 | 26.9                | 11.4                 | 1709           | 51                 | 773           |
|            | 295/30ZR19 | (100Y)     | XL      | BSW      | 252050       | 10.0-(10.5)-11.0               | 32           | 9.4                 | 26.1                | 11.9                 | 1764           | 50                 | 795           |
| 20         | 325/30ZR19 | (105Y)     | XL      | BSW      | 252790       | 11.0-(11.5)-12.0               | 36           | 9.1                 | 26.7                | 13.0                 | 2039           | 50                 | 777           |
|            | 235/30ZR20 | (88Y)      | XL      | BSW      | 252590       | (8.5)                          | 22           | 10.1                | 25.7                | 9.4                  | 1235           | 50                 | 808           |
|            | 245/30ZR20 | (90Y)      | XL      | BSW      | 252570       | 8.0-(8.5)-9.0                  | 23           | 10.1                | 25.9                | 9.7                  | 1323           | 50                 | 803           |
|            | 245/35ZR20 | (95Y)      | XL      | BSW      | 252580       | 8.0-(8.5)-9.5                  | 24           | 10.1                | 26.8                | 9.7                  | 1521           | 50                 | 776           |
|            | 245/40ZR20 | 99Y        | XL      | BSW      | 252960       | 8.0-(8.5)-9.5                  | 28           | 9.7                 | 27.7                | 9.8                  | 1709           | 50                 | 749           |
|            | 245/45ZR20 | 103Y       | XL      | BSW      | 252820       | 7.5-(8.0)-9.0                  | 31           | 9.7                 | 28.7                | 9.6                  | 1929           | 50                 | 725           |
|            | 255/30ZR20 | (92Y)      | XL      | BSW      | 252000       | 8.5-(9.0)-9.5                  | 25           | 10.1                | 26.0                | 10.0                 | 1389           | 50                 | 799           |
|            | 255/35ZR20 | (97Y)      | XL      | BSW      | 252020       | 8.5-(9.0)-10.0                 | 28           | 10.1                | 27.0                | 10.1                 | 1609           | 50                 | 770           |
|            | 255/40ZR20 | (101Y)     | XL      | BSW      | 252800       | 8.5-(9.0)-10.0                 | 30           | 9.7                 | 28.0                | 10.2                 | 1819           | 50                 | 741           |
|            | 275/30ZR20 | (97Y)      | XL      | BSW      | 252560       | 9.0-(9.5)-10.0                 | 28           | 10.1                | 26.7                | 10.6                 | 1609           | 50                 | 779           |
|            | 275/35ZR20 | (102Y)     | XL      | BSW      | 252490       | 9.0-(9.5)-11.0                 | 28           | 10.1                | 27.7                | 10.7                 | 1874           | 50                 | 751           |
|            | 275/40ZR20 | 106Y       | XL      | BSW      | 252830       | 9.0-(9.5)-11.0                 | 33           | 9.7                 | 28.7                | 10.9                 | 2094           | 50                 | 725           |
|            | 285/30ZR20 | (99Y)      | XL      | BSW      | 252550       | 9.5-(10.0)-10.5                | 31           | 9.4                 | 26.9                | 11.2                 | 1709           | 50                 | 773           |
|            | 285/35ZR20 | (100Y)     | SL      | BSW      | 100450       | 9.5-(10.0)-11.0                | 37           | 9.1                 | 27.9                | 11.4                 | 1764           | 51                 | 745           |
|            | 305/25ZR20 | (97Y)      | XL      | BSW      | 252810       | 10.5-(11.0)-11.5               | 35           | 9.4                 | 26.0                | 12.3                 | 1609           | 50                 | 799           |
|            | 325/25ZR20 | (101Y)     | XL      | BSW      | 252880       | 11.5-(12.0)-12.5               | 35           | 9.1                 | 26.4                | 13.2                 | 1819           | 50                 | 788           |

Speed rated "Y" = 186mph, "V" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



ULTRA-HIGH PERFORMANCE SUMMER TIRE

The Proxes T1R is an ultra-high performance summer tire designed for high-end sport sedans and coupes. A refined tread design and construction offer improved dry and wet handling as well as performance.

POPULAR FITMENTS

Audi A7  
Cadillac CTS-V  
Chevrolet Corvette  
Jaguar XKR  
Lexus GS 450

UTQG

280 AA A

SILICA-REINFORCED,  
HIGH-GRIP TREAD COMPOUND

- Improves wet performance.
- Delivers exceptional dry performance.

REFINED UNIDIRECTIONAL  
TREAD DESIGN

- Provides exceptional dry and wet performance with a classic design.

V-SHAPED MAIN GROOVES

- Disperses water for better wet performance and aquaplaning.

RIGID SHOULDER RIB-BANDS

- Improves cornering for exceptional dry performance.
- Reduces irregular wear for a smooth, quiet ride.

PARALLEL SHOULDER SLITS

- Helps reduce irregular wear.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 185/55R15 | 82V        | SL      | BSW      | 241150       | 5.0-( <b>6.0</b> )-6.5         | 16           | 10.6                | 23.0                | 7.6                  | 1047           | 44                 | 903           |
|            | 195/45R15 | 78V        | SL      | BSW      | 250760       | 6.0-( <b>6.5</b> )-7.5         | 16           | 10.3                | 22.0                | 7.7                  | 937            | 44                 | 946           |
| 16         | 195/55R16 | 91V        | RD      | BSW      | 241070       | 5.5-( <b>6.0</b> )-7.0         | 18           | 10.6                | 24.3                | 7.9                  | 1356           | 50                 | 854           |
|            | 225/50R16 | 92W        | SL      | BSW      | 250790       | 6.0-( <b>7.0</b> )-8.0         | 21           | 10.6                | 24.7                | 9.2                  | 1389           | 44                 | 840           |
|            | 245/45R16 | 94W        | SL      | BSW      | 250640       | 7.5-( <b>8.0</b> )-9.0         | 22           | 10.3                | 24.6                | 9.6                  | 1477           | 44                 | 844           |
|            | 235/35R19 | 91Y        | RD      | BSW      | 251630       | 8.0-( <b>8.5</b> )-9.5         | 22           | 10.3                | 25.5                | 9.5                  | 1356           | 50                 | 814           |
| 19         | 275/30R19 | 96Y        | RD      | BSW      | 251590       | 9.0-( <b>9.5</b> )-10.0        | 26           | 10.3                | 25.6                | 10.6                 | 1565           | 50                 | 812           |
|            | 315/25R19 | 98Y        | RD      | BSW      | 251300       | 11.0-( <b>11.5</b> )-12.0      | 30           | 10.3                | 25.2                | 12.8                 | 1653           | 50                 | 824           |
|            | 245/30R20 | 90Y        | RD      | BSW      | 251520       | 8.0-( <b>8.5</b> )-9.0         | 24           | 10.3                | 25.9                | 9.5                  | 1323           | 50                 | 801           |
| 20         | 255/30R20 | 92Y        | RD      | BSW      | 251510       | 8.5-( <b>9.5</b> )-9.5         | 25           | 10.3                | 26.1                | 10.0                 | 1389           | 50                 | 796           |
|            | 255/35R20 | 97Y        | RD      | BSW      | 251550       | 8.5-( <b>9.0</b> )-10.0        | 27           | 10.3                | 27.0                | 10.2                 | 1609           | 50                 | 769           |
|            | 275/30R20 | 97Y        | RD      | BSW      | 251500       | <b>9.0-(9.5)-10.0</b>          | 26           | 10.3                | 26.6                | 10.6                 | 1609           | 50                 | 782           |
|            | 285/25R20 | 93Y        | RD      | BSW      | 240410       | <b>(10.5)</b>                  | 27           | 10.3                | 25.6                | 11.5                 | 1433           | 50                 | 762           |
|            | 305/25R20 | 97Y        | RD      | BSW      | 240930       | 10.5-( <b>11.0</b> )-11.5      | 29           | 10.3                | 26.0                | 12.2                 | 1609           | 50                 | 799           |
|            | 305/30R20 | 103Y       | RD      | BSW      | 240490       | 10.5-( <b>11.0</b> )-11.5      | 34           | 10.3                | 27.2                | 12.3                 | 1929           | 50                 | 813           |
|            | 315/25R20 | 99Y        | RD      | BSW      | 250580       | 11.0-( <b>11.5</b> )-12.0      | 33           | 10.3                | 26.3                | 12.6                 | 1709           | 50                 | 789           |
|            | 345/25R20 | 104Y       | RD      | BSW      | 251400       | 12.0-( <b>12.5</b> )-13.0      | 35           | 10.3                | 26.8                | 13.6                 | 1984           | 50                 | 776           |
| 21         | 255/30R21 | 93Y        | RD      | BSW      | 240780       | 8.5-( <b>9.0</b> )-9.5         | 26           | 10.3                | 27.1                | 10.2                 | 1433           | 50                 | 767           |
|            | 285/30R21 | 100Y       | RD      | BSW      | 240510       | 9.5-( <b>10.0</b> )-10.5       | 30           | 10.3                | 27.8                | 11.2                 | 1764           | 50                 | 747           |
|            | 295/25R21 | 96Y        | RD      | BSW      | 240330       | 10.0-( <b>10.5</b> )-11.0      | 30           | 10.3                | 27.0                | 11.7                 | 1565           | 50                 | 770           |
| 22         | 255/30R22 | 95Y        | RD      | BSW      | 240770       | 8.5-( <b>9.0</b> )-9.5         | 30           | 10.3                | 28.1                | 10.2                 | 1521           | 50                 | 740           |
|            | 265/30R22 | 97Y        | RD      | BSW      | 240530       | 9.0-( <b>9.5</b> )-10.0        | 30           | 10.3                | 28.4                | 10.5                 | 1609           | 50                 | 732           |
|            | 285/25R22 | 95Y        | RD      | BSW      | 240370       | <b>(10.5)</b>                  | 31           | 10.3                | 27.6                | 11.4                 | 1521           | 50                 | 753           |
|            | 295/25R22 | 97Y        | RD      | BSW      | 240940       | 10.0-( <b>10.5</b> )-11.0      | 32           | 10.3                | 27.9                | 11.5                 | 1609           | 50                 | 745           |

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph. "SL" = Standard Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.





## ULTRA-HIGH PERFORMANCE ALL-SEASON TIRE

The Proxes 4 Plus is the perfect match for high-horsepower sports cars, delivering exceptional all-season performance and a quiet ride throughout the life of the tire. It also offers a quiet ride plus excellent tread life and a competitive mileage warranty. This ultra-high performance all-season tire is available in a wide range of sizes and is backed by the Toyo Tires No Regrets Trial Offer.

### POPULAR FITMENTS

Chevrolet Camaro  
Dodge Challenger  
Ford Mustang  
Hyundai Genesis Coupe  
Nissan 370Z

UTQG  
560 A A

### HIGH-GRIP SILICA TREAD COMPOUND

- Delivers exceptional braking and handling in wet and dry conditions.
- Delivers longer tread life.



# PROXES 4 PLUS

### MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves light snow traction.

### OUTSIDE TREAD: WIDE RIBS AND CLOSED SHOULDER

- Improves vehicle responsiveness.
- Improves cornering performance.

### INSIDE TREAD: WIDE GROOVES AND HIGH SIPE DENSITY

- Improves braking and acceleration.
- Maximizes wet and snow evacuation.



\*Mileage projection based upon commissioned third-party test results. Test conducted on 225/45R17 tires. Individual results may vary.



|    | WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|-----------|------------|---------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 16 |            | 195/50R16 | 84W        | SL      | BSW      | 254580       | 5.5- <b>(6.0)</b> -7.0            | 19           | 10.3                | 23.7                | 7.9                  | 1102           | 51                 | 876           |
|    |            | 205/50R16 | 91V        | XL      | BSW      | 254010       | 5.5- <b>(6.5)</b> -7.5            | 21           | 10.7                | 24.0                | 8.5                  | 1356           | 50                 | 865           |
|    |            | 205/55R16 | 94V        | XL      | BSW      | 254000       | 5.5- <b>(6.5)</b> -7.5            | 23           | 10.7                | 24.7                | 8.6                  | 1477           | 50                 | 840           |
| 17 |            | 205/40R17 | 84W        | XL      | BSW      | 254230       | 7.0- <b>(7.5)</b> -8.0            | 20           | 10.3                | 23.5                | 8.5                  | 1102           | 50                 | 882           |
|    |            | 205/45R17 | 88W        | XL      | BSW      | 254590       | 6.5- <b>(7.0)</b> -7.5            | 21           | 10.3                | 24.3                | 8.1                  | 1235           | 50                 | 857           |
|    |            | 205/50R17 | 93W        | XL      | BSW      | 254020       | 5.5- <b>(6.5)</b> -7.5            | 22           | 10.3                | 25.1                | 8.5                  | 1433           | 50                 | 827           |
|    |            | 215/45R17 | 91W        | XL      | BSW      | 254090       | <b>(7.0)</b> -8.0                 | 23           | 10.3                | 24.6                | 8.4                  | 1356           | 50                 | 843           |
|    |            | 215/50R17 | 95W        | XL      | BSW      | 254030       | 6.0- <b>(7.0)</b> -7.5            | 25           | 10.3                | 25.4                | 8.9                  | 1521           | 50                 | 818           |
|    |            | 215/55R17 | 94W        | SL      | BSW      | 254650       | 6.0- <b>(7.0)</b> -7.5            | 26           | 10.3                | 26.3                | 8.9                  | 1477           | 51                 | 790           |
|    |            | 225/45R17 | 94W        | XL      | BSW      | 254100       | 7.0- <b>(7.5)</b> -8.5            | 24           | 10.3                | 25.0                | 8.9                  | 1477           | 50                 | 831           |
|    |            | 225/50R17 | 98W        | XL      | BSW      | 254040       | 6.0- <b>(7.0)</b> -8.0            | 26           | 10.3                | 25.9                | 9.4                  | 1653           | 50                 | 803           |
|    |            | 225/55R17 | 97W        | SL      | BSW      | 254600       | 6.0- <b>(7.0)</b> -8.0            | 27           | 10.3                | 26.8                | 9.2                  | 1609           | 51                 | 776           |
|    |            | 235/45R17 | 97W        | XL      | BSW      | 254110       | 7.5- <b>(8.0)</b> -9.0            | 26           | 10.3                | 25.3                | 9.5                  | 1609           | 50                 | 821           |
|    |            | 235/50R17 | 100W       | XL      | BSW      | 254050       | 6.5- <b>(7.5)</b> -8.5            | 28           | 10.3                | 26.3                | 9.8                  | 1764           | 50                 | 789           |
|    |            | 235/55R17 | 99W        | SL      | BSW      | 254610       | 6.5- <b>(7.5)</b> -8.5            | 27           | 10.3                | 27.2                | 9.6                  | 1709           | 51                 | 765           |
|    |            | 245/40R17 | 95W        | XL      | BSW      | 254240       | 8.0- <b>(8.5)</b> -9.5            | 25           | 10.3                | 24.8                | 9.9                  | 1521           | 50                 | 837           |
|    |            | 245/45R17 | 99W        | XL      | BSW      | 254120       | 7.5- <b>(8.0)</b> -9.0            | 26           | 10.3                | 25.8                | 9.8                  | 1709           | 50                 | 806           |
|    |            | 255/40R17 | 98W        | XL      | BSW      | 254250       | 8.5- <b>(9.0)</b> -10.0           | 26           | 10.3                | 25.0                | 10.3                 | 1653           | 50                 | 832           |
|    |            | 275/40R17 | 98W        | SL      | BSW      | 254620       | 9.0- <b>(9.5)</b> -11.0           | 27           | 10.3                | 25.7                | 10.9                 | 1653           | 51                 | 809           |
|    |            | 215/45R18 | 93W        | XL      | BSW      | 254130       | <b>(7.0)</b> -8.0                 | 23           | 10.3                | 25.6                | 8.4                  | 1433           | 50                 | 811           |
|    |            | 225/40R18 | 92Y        | XL      | BSW      | 254260       | 7.5- <b>(8.0)</b> -9.0            | 22           | 10.0                | 25.1                | 8.9                  | 1389           | 50                 | 827           |
|    |            | 225/45R18 | 95W        | XL      | BSW      | 254140       | 7.0- <b>(7.5)</b> -8.5            | 26           | 10.3                | 26.0                | 9.0                  | 1521           | 50                 | 800           |
|    |            | 225/50R18 | 95W        | SL      | BSW      | 254060       | 6.0- <b>(7.0)</b> -8.0            | 28           | 10.3                | 26.9                | 9.2                  | 1521           | 51                 | 773           |
|    |            | 235/40R18 | 95Y        | XL      | BSW      | 254270       | 8.0- <b>(8.5)</b> -9.5            | 23           | 10.0                | 25.5                | 9.5                  | 1521           | 50                 | 815           |
|    |            | 235/45R18 | 98W        | XL      | BSW      | 254150       | 7.5- <b>(8.0)</b> -9.0            | 28           | 10.3                | 26.3                | 9.3                  | 1653           | 50                 | 789           |
| 18 |            | 235/50R18 | 101W       | XL      | BSW      | 254070       | 6.5- <b>(7.5)</b> -8.5            | 30           | 10.3                | 27.3                | 9.6                  | 1819           | 50                 | 761           |
|    |            | 245/40R18 | 97Y        | XL      | BSW      | 254280       | 8.0- <b>(8.5)</b> -9.5            | 26           | 10.0                | 25.9                | 9.7                  | 1609           | 50                 | 802           |
|    |            | 245/45R18 | 100W       | XL      | BSW      | 254160       | 7.5- <b>(8.0)</b> -9.0            | 29           | 10.3                | 26.7                | 9.7                  | 1764           | 50                 | 779           |
|    |            | 255/35R18 | 94Y        | XL      | BSW      | 254360       | 8.5- <b>(9.0)</b> -10.0           | 25           | 10.0                | 25.0                | 10.2                 | 1477           | 50                 | 831           |
|    |            | 255/40R18 | 99Y        | XL      | BSW      | 254290       | 8.5- <b>(9.0)</b> -10.0           | 27           | 10.0                | 26.0                | 10.2                 | 1709           | 50                 | 799           |
|    |            | 255/45R18 | 103Y       | XL      | BSW      | 254170       | 8.0- <b>(8.5)</b> -9.5            | 29           | 10.0                | 27.0                | 10.0                 | 1929           | 50                 | 768           |
|    |            | 265/35R18 | 97W        | XL      | BSW      | 254630       | 9.0- <b>(9.5)</b> -10.5           | 26           | 10.3                | 25.3                | 10.7                 | 1609           | 50                 | 821           |
|    |            | 275/35R18 | 99Y        | XL      | BSW      | 254370       | 9.0- <b>(9.5)</b> -11.0           | 27           | 10.0                | 25.6                | 10.9                 | 1709           | 50                 | 813           |
|    |            | 285/35R18 | 101Y       | XL      | BSW      | 254380       | 9.5- <b>(10.0)</b> -11.0          | 31           | 10.0                | 25.9                | 11.4                 | 1819           | 50                 | 803           |
|    |            | 225/35R19 | 88Y        | XL      | BSW      | 254390       | 7.5- <b>(8.0)</b> -9.0            | 23           | 10.0                | 25.2                | 9.1                  | 1235           | 50                 | 823           |
|    |            | 225/40R19 | 93Y        | XL      | BSW      | 254300       | 7.5- <b>(8.0)</b> -9.0            | 24           | 10.0                | 26.1                | 9.1                  | 1433           | 50                 | 796           |
|    |            | 225/45R19 | 96W        | XL      | BSW      | 254180       | 7.0- <b>(7.5)</b> -8.5            | 27           | 10.3                | 27.1                | 9.0                  | 1565           | 50                 | 767           |
|    |            | 235/35R19 | 91Y        | XL      | BSW      | 254400       | 8.0- <b>(8.5)</b> -9.5            | 25           | 10.0                | 25.5                | 9.5                  | 1356           | 50                 | 816           |
|    |            | 235/40R19 | 96Y        | XL      | BSW      | 254660       | 8.0- <b>(8.5)</b> -9.5            | 27           | 10.0                | 26.4                | 9.5                  | 1565           | 50                 | 786           |
| 19 |            | 245/35R19 | 93Y        | XL      | BSW      | 254410       | 8.0- <b>(8.5)</b> -9.5            | 27           | 10.0                | 25.8                | 9.8                  | 1433           | 50                 | 806           |
|    |            | 245/40R19 | 98Y        | XL      | BSW      | 254310       | 8.0- <b>(8.5)</b> -9.5            | 27           | 10.0                | 26.7                | 9.8                  | 1653           | 50                 | 777           |
|    |            | 245/45R19 | 102Y       | XL      | BSW      | 254190       | 7.5- <b>(8.0)</b> -9.0            | 29           | 10.0                | 27.7                | 9.6                  | 1874           | 50                 | 749           |
|    |            | 245/50R19 | 105W       | XL      | BSW      | 254080       | 7.0- <b>(7.5)</b> -8.5            | 31           | 10.7                | 28.7                | 10.0                 | 2039           | 50                 | 724           |
|    |            | 255/30R19 | 91Y        | XL      | BSW      | 254480       | 8.5- <b>(9.0)</b> -9.5            | 24           | 10.0                | 25.1                | 10.2                 | 1356           | 50                 | 828           |
|    |            | 255/35R19 | 96Y        | XL      | BSW      | 254420       | 8.5- <b>(9.0)</b> -10.0           | 28           | 10.0                | 26.0                | 10.2                 | 1565           | 50                 | 798           |
|    |            | 255/40R19 | 100Y       | XL      | BSW      | 254320       | 8.5- <b>(9.0)</b> -10.0           | 28           | 10.0                | 27.0                | 10.2                 | 1764           | 50                 | 768           |
|    |            | 255/45R19 | 104W       | XL      | BSW      | 254200       | 8.0- <b>(8.5)</b> -9.5            | 30           | 10.3                | 28.1                | 10.0                 | 1984           | 50                 | 740           |

|    | WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|-----------|------------|---------|----------|--------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 19 |            | 265/30R19 | 93Y        | XL      | BSW      | 254490       | 9.0- <b>(9.5)</b> -10.0           | 25           | 10.0                | 25.3                | 10.7                 | 1433           | 50                 | 821           |
|    |            | 275/30R19 | 96Y        | XL      | BSW      | 254500       | 9.0- <b>(9.5)</b> -10.0           | 27           | 10.0                | 25.6                | 10.6                 | 1565           | 50                 | 811           |
|    |            | 275/35R19 | 100Y       | XL      | BSW      | 254430       | 9.0- <b>(9.5)</b> -11.0           | 29           | 10.0                | 26.6                | 10.9                 | 1764           | 50                 | 782           |
|    |            | 275/40R19 | 105Y       | XL      | BSW      | 254330       | 9.0- <b>(9.5)</b> -11.0           | 33           | 10.0                | 27.8                | 10.9                 | 2039           | 50                 | 748           |
|    |            | 295/30R19 | 100Y       | XL      | BSW      | 254510       | 10.0- <b>(10.5)</b> -11.0         | 29           | 10.0                | 26.0                | 11.9                 | 1764           | 50                 | 798           |
| 20 |            | 225/30R20 | 85W        | XL      | BSW      | 254520       | <b>(8.0)</b>                      | 22           | 10.3                | 25.4                | 9.1                  | 1135           | 50                 | 819           |
|    |            | 225/35R20 | 90W        | XL      | BSW      | 254440       | 7.5- <b>(8.0)</b> -9.0            | 25           | 10.3                | 26.3                | 9.0                  | 1323           | 50                 | 791           |
|    |            | 235/30R20 | 88W        | XL      | BSW      | 254530       | <b>(8.5)</b>                      | 23           | 10.3                | 25.6                | 9.5                  | 1235           | 50                 | 812           |
|    |            | 245/35R20 | 95W        | XL      | BSW      | 254450       | 8.0- <b>(8.5)</b> -9.5            | 29           | 10.3                | 26.8                | 9.8                  | 1521           | 50                 | 776           |
|    |            | 245/40R20 | 99W        | XL      | BSW      | 254340       | 8.0- <b>(8.5)</b> -9.5            | 29           | 10.3                | 27.7                | 9.8                  | 1709           | 50                 | 749           |
|    |            | 245/45R20 | 103Y       | XL      | BSW      | 254210       | 7.5- <b>(8.0)</b> -9.0            | 30           | 10.0                | 28.7                | 9.6                  | 1929           | 50                 | 725           |
|    |            | 255/30R20 | 92W        | XL      | BSW      | 254540       | 8.5- <b>(9.0)</b> -9.5            | 27           | 10.3                | 26.1                | 10.2                 | 1389           | 50                 | 797           |
|    |            | 255/35R20 | 97Y        | XL      | BSW      | 254460       | 8.5- <b>(9.0)</b> -10.0           | 28           | 10.0                | 27.1                | 10.0                 | 1609           | 50                 | 767           |
|    |            | 255/45R20 | 105Y       | XL      | BSW      | 254220       | 8.0- <b>(8.5)</b> -9.5            | 32           | 10.0                | 29.1                | 10.0                 | 2039           | 50                 | 715           |
|    |            | 275/30R20 | 97Y        | XL      | BSW      | 254550       | 9.0- <b>(9.5)</b> -10.0           | 28           | 10.0                | 26.5                | 10.9                 | 1609           | 50                 | 783           |
|    |            | 275/35R20 | 102Y       | XL      | BSW      | 254470       | 9.0- <b>(9.5)</b> -11.0           | 31           | 10.0                | 27.6                | 10.9                 | 1874           | 50                 | 754           |
|    |            | 275/40R20 | 106Y       | XL      | BSW      | 254350       | 9.0- <b>(9.5)</b> -11.0           | 33           | 10.0                | 28.7                | 10.9                 | 2094           | 50                 | 725           |
|    |            | 295/25R20 | 95Y        | XL      | BSW      | 254570       | 10.0- <b>(10.5)</b> -11.0         | 28           | 10.0                | 25.6                | 11.7                 | 1521           | 50                 | 812           |
|    |            | 295/30R20 | 101Y       | XL      | BSW      | 254560       | 10.0- <b>(10.5)</b> -11.0         | 31           | 10.0                | 27.0                | 11.9                 | 1819           | 50                 | 769           |
|    |            | 315/35R20 | 110Y       | XL      | BSW      | 254640       | 10.5- <b>(11.0)</b> -12.5         | 26           | 10.0                | 28.7                | 12.6                 | 2337           | 50                 | 725           |



COMPETITION

PROXES R888R



DOT COMPETITION

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 4.5 |
| WET PERFORMANCE | 4.0 |
| BRAKING         | 4.5 |
| TREAD LIFE      | 4.5 |

UTQG

100 AA A

VEHICLE & APPLICATION SEGMENT

Road Racing  
Race-Prepared Vehicles  
High Performance Street

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"

PROXES R888



DOT COMPETITION

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 4.0 |
| WET PERFORMANCE | 4.5 |
| BRAKING         | 4.5 |
| TREAD LIFE      | 4.5 |

UTQG

100 AA A

VEHICLE & APPLICATION SEGMENT

Road Racing  
Race-Prepared Vehicles  
High Performance Street

WHEEL DIAMETER

13"-14"-15"-16"-17"-18"-19"-20"

PROXES RR



DOT COMPETITION

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 4.5 |
| WET PERFORMANCE | N/A |
| BRAKING         | 4.5 |
| TREAD LIFE      | 4.0 |

UTQG

40 C A

VEHICLE & APPLICATION SEGMENT

Road Racing  
Endurance Racing  
Race-Prepared Vehicles

WHEEL DIAMETER

13"-15"-16"-17"-18"

PROXES RA1



DOT COMPETITION

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 3.5 |
| WET PERFORMANCE | 5.0 |
| BRAKING         | 4.5 |
| TREAD LIFE      | 5.0 |

UTQG

100 AA A

VEHICLE & APPLICATION SEGMENT

Road Racing  
Race-Prepared Vehicles  
High Performance Street

WHEEL DIAMETER

13"-15"-16"-17"-18"

PROXES RS1



FULL-SLICK COMPETITION

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 5.0 |
| WET PERFORMANCE | N/A |
| BRAKING         | 5.0 |
| TREAD LIFE      | 4.0 |

UTQG

--

VEHICLE & APPLICATION SEGMENT

Road Racing  
Endurance Racing  
Race-Prepared Vehicles

WHEEL DIAMETER

18"

PROXES TQ



DOT DRAG RADIAL

|                 |     |
|-----------------|-----|
| DRY PERFORMANCE | 4.5 |
| WET PERFORMANCE | N/A |
| BRAKING         | 4.5 |
| TREAD LIFE      | 4.5 |

UTQG

00 B B

VEHICLE & APPLICATION SEGMENT

Drag Racing

WHEEL DIAMETER

16"-17"-18"

COMPETITION:

Made for the track, these tires are engineered to win. From road racing to track days and high-performance driving schools, Toyo Tires have been a staple in U.S. racing for over 25 years. You'll find them as the spec tire for several classes in NASA and PCA Club Racing.





DOT COMPETITION TIRE

The Proxes R888R is an evolution of the race-winning Proxes R888, delivering even faster lap times and better dry handling. The credit goes to a new tread design and an improved contact patch that puts more rubber on the track. Racers will also appreciate the predictable handling and how quickly the Proxes R888R reaches optimal operating temperature.

\*Caution: Recommended for competition events only.

POPULAR FITMENTS

BMW 3 Series  
BMW 4 Series  
Porsche Cayman  
Chevrolet Corvette  
Porsche 911

UTQG

100 AA A

HIGH GRIP RACE COMPOUND

- Reaches optimal operating temperature quickly and provides consistent performance.
- Improves grip for excellent cornering performance.

OPTIMIZED CONTACT PATCH

- Improves dry traction in braking, acceleration and cornering.

LARGE TREAD BLOCKS ON OUTSIDE TREAD

- Maximizes lateral grip for improved cornering.

WIDE CENTER RIB

- Improves directional stability and precise steering response.

WATER EVACUATION CHANNEL

- Assists with wet traction.

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES R888R:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: 32 to 38 (psi)
- Camber: -1° to -3°
- Caster: As much positive as possible



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (in.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (in.)** | OVERALL WIDTH (in.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|----------------------|-----------------------|----------------|--------------------|---------------|
| 13         | 185/60R13  | 80V        | SL      | BSW      | 103180       | 5.0- <b>(5.5)</b> -6.5         | 17           | 6.3                 | 21.7                 | 7.4                   | 992            | 51                 | 956           |
|            | 205/60R13  | 86V        | SL      | BSW      | 103200       | 5.5- <b>(6.0)</b> -7.5         | 20           | 6.3                 | 22.7                 | 8.2                   | 1168           | 51                 | 916           |
|            | 225/45R13  | 84V        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
| 14         | 185/60R14  | 82V        | SL      | BSW      | 103190       | 5.0- <b>(5.5)</b> -6.5         | 19           | 6.3                 | 22.8                 | 7.4                   | 1047           | 51                 | 913           |
|            | 195/50R15  | 82V        | SL      | BSW      | 102740       | 5.5- <b>(6.0)</b> -7.0         | 19           | 6.3                 | 22.7                 | 7.9                   | 1047           | 51                 | 914           |
|            | 195/55R15  | 85V        | SL      | BSW      | 103520       | 5.5- <b>(6.0)</b> -7.0         | 20           | 6.3                 | 23.4                 | 7.9                   | 1135           | 51                 | 887           |
| 15         | 205/50ZR15 | 86W        | SL      | BSW      | 103210       | 5.5- <b>(6.5)</b> -7.5         | 21           | 6.3                 | 23.1                 | 8.4                   | 1168           | 51                 | 899           |
|            | 225/50ZR15 | 91W        | SL      | BSW      | 103510       | 6.0- <b>(7.0)</b> -8.0         | 23           | 6.3                 | 23.9                 | 9.2                   | 1356           | 51                 | 869           |
|            | 225/45ZR15 | 87W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 235/50ZR15 | 94W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 195/50ZR16 | 84W        | SL      | BSW      | 103500       | 5.5- <b>(6.0)</b> -7.0         | 20           | 6.3                 | 23.7                 | 7.9                   | 1102           | 51                 | 876           |
| 16         | 205/45ZR16 | 83W        | SL      | BSW      | 103800       | 6.5- <b>(7.0)</b> -7.5         | 21           | 6.3                 | 23.2                 | 8.1                   | 1074           | 51                 | 894           |
|            | 205/50ZR16 | 87W        | SL      | BSW      | 103810       | 5.5- <b>(6.5)</b> -7.5         | 22           | 6.3                 | 24.1                 | 8.4                   | 1201           | 51                 | 862           |
|            | 205/55ZR16 | 94W        | XL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 225/45ZR16 | 89W        | SL      | BSW      | 103530       | 7.0- <b>(7.5)</b> -8.5         | 23           | 6.3                 | 23.9                 | 8.9                   | 1279           | 51                 | 868           |
|            | 245/45ZR16 | 94W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 255/50ZR16 | 99W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 205/40ZR17 | 80W        | SL      | BSW      | 103540       | 7.0- <b>(7.5)</b> -8.0         | 20           | 6.3                 | 23.5                 | 8.3                   | 992            | 51                 | 885           |
|            | 205/45ZR17 | 84W        | SL      | BSW      | 103850       | 6.5- <b>(7.0)</b> -7.5         | 22           | 6.3                 | 24.3                 | 8.1                   | 1102           | 51                 | 857           |
| 17         | 205/50ZR17 | 89W        | SL      | BSW      | 103820       | 5.5- <b>(6.5)</b> -7.5         | 23           | 6.3                 | 25.1                 | 8.4                   | 1279           | 51                 | 827           |
|            | 215/45ZR17 | 87W        | SL      | BSW      | 103390       | <b>(7.0)</b> -8.0              | 23           | 6.3                 | 24.6                 | 8.4                   | 1201           | 51                 | 843           |
|            | 225/45ZR17 | 91W        | SL      | BSW      | 103400       | 7.0- <b>(7.5)</b> -8.5         | 24           | 6.3                 | 25.0                 | 8.9                   | 1356           | 51                 | 832           |
|            | 235/40ZR17 | 90W        | SL      | BSW      | 103410       | 8.0- <b>(8.5)</b> -9.5         | 24           | 6.3                 | 24.4                 | 9.5                   | 1323           | 51                 | 851           |
|            | 235/45ZR17 | 94W        | SL      | BSW      | 103860       | 7.5- <b>(8.0)</b> -9.0         | 25           | 6.3                 | 25.4                 | 9.3                   | 1477           | 51                 | 819           |
|            | 245/40ZR17 | 91W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 255/40ZR17 | 94W        | SL      | BSW      | 103880       | 8.5- <b>(9.0)</b> -10.0        | 27           | 6.3                 | 25.0                 | 10.2                  | 1477           | 51                 | 830           |
|            | 275/40ZR17 | 98W        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 315/35ZR17 | 102W       | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 225/40ZR18 | 92Y        | XL      | BSW      | 102700       | 7.5- <b>(8.0)</b> -9.0         | 24           | 6.3                 | 25.1                 | 9.1                   | 1389           | 50                 | 828           |
|            | 235/40ZR18 | 91Y        | SL      | BSW      | 103420       | 8.0- <b>(8.5)</b> -9.5         | 25           | 6.3                 | 25.4                 | 9.5                   | 1356           | 51                 | 818           |
| 18         | 245/40ZR18 | 93Y        | SL      | BSW      | 103870       | 8.0- <b>(8.5)</b> -9.5         | 26           | 6.3                 | 25.7                 | 9.8                   | 1433           | 51                 | 808           |
|            | 255/35ZR18 | 90Y        | SL      | BSW      | 103830       | 8.5- <b>(9.0)</b> -10.0        | 26           | 6.3                 | 25.0                 | 10.2                  | 1323           | 51                 | 831           |
|            | 265/35ZR18 | 93Y        | SL      | BSW      | 104250       | 9.0- <b>(9.5)</b> -10.5        | 28           | 6.3                 | 25.3                 | 10.7                  | 1433           | 51                 | 821           |
|            | 275/35ZR18 | 95Y        | SL      | BSW      | 104260       | 9.0- <b>(9.5)</b> -11.0        | 28           | 6.3                 | 25.6                 | 10.9                  | 1521           | 51                 | 813           |
|            | 295/30ZR18 | 98Y        | XL      | BSW      | 104270       | 10.0- <b>(10.5)</b> -11.0      | 29           | 6.3                 | 25.0                 | 11.9                  | 1653           | 50                 | 831           |
|            | 305/35ZR18 | 105Y       | RD      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 315/30ZR18 | 98Y        | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 335/30ZR18 | 102Y       | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 235/35ZR19 | (91Y)      | XL      | BSW      | 103840       | 8.0- <b>(8.5)</b> -9.5         | 25           | 6.3                 | 25.5                 | 9.5                   | 1356           | 50                 | 816           |
|            | 245/35ZR19 | (89Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
| 19         | 275/35ZR19 | (100Y)     | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 265/30ZR19 | 89Y        | SL      | BSW      | 104240       | 9.0- <b>(9.5)</b> -10.0        | 27           | 6.3                 | 25.3                 | 10.7                  | 1279           | 51                 | 821           |
|            | 265/35ZR19 | (94Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 265/40ZR19 | (98Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 285/35ZR19 | (99Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 295/30ZR19 | 100Y       | XL      | BSW      | 104280       | 10.0- <b>(10.5)</b> -11.0      | 30           | 6.3                 | 26.0                 | 11.9                  | 1764           | 50                 | 798           |
|            | 305/30ZR19 | (102Y)     | XL      | BSW      | 104290       | 10.5- <b>(11.0)</b> -11.5      | 32           | 6.3                 | 26.3                 | 12.3                  | 1874           | 50                 | 791           |
|            | 325/30ZR19 | (101Y)     | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 345/30ZR19 | (105Y)     | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 285/30ZR20 | (99Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
| 20         | 255/35ZR20 | (97Y)      | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 285/35ZR20 | (100Y)     | SL      | BSW      | 104150       | 9.5- <b>(10.0)</b> -11.0       | 33           | 6.3                 | 27.9                 | 11.4                  | 1764           | 51                 | 745           |
|            | 305/35ZR20 | (104Y)     | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |
|            | 315/30ZR20 | (101Y)     | SL      | BSW      | 104300       | 10.5- <b>(11.0)</b> -11.5      | 35           | 6.3                 | 27.5                 | 12.6                  | 1819           | 51                 | 756           |
|            | 325/30ZR20 | (102Y)     | SL      | BSW      | COMING SOON  |                                |              |                     |                      |                       |                |                    |               |

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "(Y)" = 195mph, "SL" = Standard Load, "XL" = Extra Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. \*\*Inflated dimensions.



DOT COMPETITION TIRE

The Proxes R888 is for drivers who know what it means to really push a car. Its optimized construction and tread design balances dry performance and wet traction, keeping you fully under control in extreme driving situations. If your idea of fun includes road racing, track days, and high-performance driving schools, then this DOT competition tire\* is for you.

\*Caution: Recommended for competition events only.

POPULAR FITMENTS

Race-prepared vehicles such as:  
BMW 3 Series  
Honda S2000  
Nissan GT-R  
Porsche 911 Turbo  
Subaru WRX

UTQG

100 AA A

ENHANCED R-COMPOUND TREAD

- Maximizes grip for better competitive handling and performance.

UNIDIRECTIONAL V-SHAPED TREAD DESIGN

- Increased tread area and limited void improve dry traction.
- V-shaped grooves assist with wet traction.

CONTINUOUS CENTER CONTACT

- Increases braking performance and dry traction.

SEMI-SLICK SHOULDER AREA

- Improves grip for better steering response.

STIFF BEAD CONSTRUCTION AND WIDER TREAD WIDTH

- Increases cornering force for better competitive handling.

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES R888:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: 32 to 38 (psi)
- Camber: -1° to -3°
- Caster: As much positive as possible



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)** | OVERALL WIDTH (IN.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|----------------------|-----------------------|----------------|--------------------|---------------|
| 13         | 185/60R13 | 80V        | SL      | BSW      | 168280       | 5.0-( <b>5.5</b> )-6.5         | 17           | 6.3                 | 21.6                 | 7.4                   | 992            | 51                 | 961           |
|            | 205/60R13 | 86V        | SL      | BSW      | 168270       | 5.5-( <b>6.0</b> )-7.5         | 19           | 6.3                 | 22.6                 | 8.2                   | 1168           | 51                 | 921           |
|            | 225/45R13 | 84V        | SL      | BSW      | 169360       | 7.0-( <b>7.5</b> )-8.5         | 18           | 6.4                 | 20.8                 | 8.8                   | 1102           | 51                 | 997           |
| 14         | 205/55R14 | 85V        | SL      | BSW      | 168060       | 5.5-( <b>6.5</b> )-7.5         | 20           | 6.3                 | 22.8                 | 8.4                   | 1135           | 51                 | 911           |
|            | 225/50R14 | 89V        | SL      | BSW      | 168070       | 6.0-( <b>7.0</b> )-8.0         | 21           | 6.3                 | 22.8                 | 9.3                   | 1279           | 51                 | 910           |
| 15         | 195/50R15 | 82V        | SL      | BSW      | 160560       | 5.5-( <b>6.0</b> )-7.0         | 19           | 6.3                 | 22.6                 | 7.8                   | 1047           | 51                 | 918           |
|            | 205/50R15 | 86W        | SL      | BSW      | 168200       | 5.5-( <b>6.5</b> )-7.5         | 20           | 6.3                 | 23.0                 | 8.5                   | 1168           | 51                 | 903           |
|            | 225/45R15 | 87W        | SL      | BSW      | 168020       | 7.0-( <b>7.5</b> )-8.5         | 20           | 6.4                 | 22.8                 | 8.9                   | 1201           | 51                 | 911           |
|            | 225/50R15 | 91W        | SL      | BSW      | 160680       | 6.0-( <b>7.0</b> )-8.0         | 22           | 6.3                 | 23.7                 | 9.1                   | 1356           | 51                 | 875           |
|            | 235/50R15 | 94W        | SL      | BSW      | 162860       | 6.5-( <b>7.5</b> )-8.5         | 24           | 6.4                 | 24.2                 | 9.6                   | 1477           | 51                 | 859           |
| 16         | 195/50R16 | 84W        | SL      | BSW      | 168290       | 5.5-( <b>6.0</b> )-7.0         | 20           | 6.4                 | 23.5                 | 7.9                   | 1102           | 51                 | 883           |
|            | 205/55R16 | 90W        | SL      | BSW      | 168220       | 5.5-( <b>6.5</b> )-7.5         | 22           | 6.3                 | 24.7                 | 8.4                   | 1323           | 51                 | 840           |
|            | 225/45R16 | 89W        | SL      | BSW      | 168260       | 7.0-( <b>7.5</b> )-8.5         | 21           | 6.3                 | 23.8                 | 9.0                   | 1279           | 51                 | 872           |
|            | 225/50R16 | 92W        | SL      | BSW      | 168150       | 6.0-( <b>7.0</b> )-8.0         | 24           | 6.3                 | 24.7                 | 9.3                   | 1389           | 51                 | 840           |
|            | 245/45R16 | 94W        | SL      | BSW      | 168030       | 7.5-( <b>8.0</b> )-9.0         | 24           | 6.3                 | 24.4                 | 9.8                   | 1477           | 51                 | 850           |
|            | 255/50R16 | 99W        | SL      | BSW      | 168050       | 7.0-( <b>8.0</b> )-9.0         | 27           | 6.4                 | 25.9                 | 10.6                  | 1709           | 51                 | 803           |
| 17         | 205/40R17 | 84W        | RD      | BSW      | 168180       | 7.0-( <b>7.5</b> )-8.0         | 19           | 6.3                 | 23.5                 | 8.3                   | 1102           | 50                 | 882           |
|            | 215/45R17 | 91W        | RD      | BSW      | 168160       | ( <b>7.0</b> )-8.0             | 22           | 6.3                 | 24.6                 | 8.5                   | 1356           | 50                 | 846           |
|            | 225/45R17 | 94W        | RD      | BSW      | 168170       | 7.0-( <b>7.5</b> )-8.5         | 24           | 6.3                 | 25.0                 | 9.1                   | 1477           | 50                 | 832           |
|            | 235/40R17 | 90W        | SL      | BSW      | 156650       | 8.0-( <b>8.5</b> )-9.5         | 24           | 6.3                 | 24.6                 | 9.6                   | 1323           | 51                 | 846           |
|            | 235/45R17 | 93W        | SL      | BSW      | 168190       | 7.5-( <b>8.0</b> )-9.0         | 24           | 6.3                 | 25.3                 | 9.5                   | 1433           | 51                 | 821           |
|            | 245/40R17 | 91W        | SL      | BSW      | 168130       | 8.0-( <b>8.5</b> )-9.5         | 25           | 6.4                 | 24.7                 | 9.8                   | 1356           | 51                 | 842           |
|            | 255/40R17 | 94W        | SL      | BSW      | 168140       | 8.5-( <b>9.0</b> )-10.0        | 26           | 6.3                 | 25.1                 | 10.4                  | 1477           | 51                 | 827           |
|            | 275/40R17 | 98W        | SL      | BSW      | 168010       | 9.0-( <b>9.5</b> )-11.0        | 29           | 6.4                 | 25.7                 | 11.0                  | 1653           | 51                 | 809           |
|            | 315/35R17 | 102W       | SL      | BSW      | 168540       | 10.5-( <b>11.0</b> )-12.5      | 30           | 6.4                 | 25.6                 | 12.6                  | 1874           | 51                 | 812           |
|            | 225/40R18 | 92Y        | RD      | BSW      | 168210       | 7.5-( <b>8.0</b> )-9.0         | 23           | 6.3                 | 25.1                 | 8.8                   | 1389           | 50                 | 827           |
| 18         | 235/40R18 | 91Y        | SL      | BSW      | 168230       | 8.0-( <b>8.5</b> )-9.5         | 25           | 6.3                 | 25.5                 | 9.6                   | 1356           | 51                 | 814           |
|            | 245/40R18 | 93Y        | SL      | BSW      | 159490       | 8.0-( <b>8.5</b> )-9.5         | 26           | 6.3                 | 25.7                 | 9.8                   | 1433           | 51                 | 808           |
|            | 255/35R18 | 94Y        | RD      | BSW      | 160980       | 8.5-( <b>9.0</b> )-10.0        | 26           | 6.3                 | 25.1                 | 10.2                  | 1477           | 50                 | 828           |
|            | 265/35R18 | 93Y        | SL      | BSW      | 172770       | 9.0-( <b>9.5</b> )-10.5        | 29           | 6.3                 | 25.3                 | 10.7                  | 1433           | 51                 | 821           |
|            | 275/35R18 | 99Y        | RD      | BSW      | 162800       | 9.0-( <b>9.5</b> )-11.0        | 28           | 6.4                 | 25.7                 | 11.0                  | 1709           | 50                 | 809           |
|            | 275/40R18 | 99W        | SL      | BSW      | 168110       | 9.0-( <b>9.5</b> )-11.0        | 29           | 6.4                 | 26.7                 | 11.0                  | 1709           | 51                 | 779           |
|            | 285/30R18 | 97Y        | RD      | BSW      | 168250       | 9.5-( <b>10.0</b> )-10.5       | 28           | 6.3                 | 24.8                 | 11.3                  | 1609           | 50                 | 836           |
|            | 295/30R18 | 98Y        | RD      | BSW      | 160960       | 10.0-( <b>10.5</b> )-11.0      | 29           | 6.3                 | 25.1                 | 11.8                  | 1653           | 50                 | 828           |
|            | 305/35R18 | -          | SL      | BSW      | 162810       | 10.0-( <b>11.0</b> )-12.0      | 33           | 6.4                 | 26.3                 | 12.4                  | 1819           | 51                 | 790           |
|            | 315/30R18 | 98Y        | SL      | BSW      | 162820       | 10.5-( <b>11.0</b> )-11.5      | 30           | 6.4                 | 25.5                 | 12.5                  | 1653           | 51                 | 814           |
|            | 335/30R18 | 102Y       | SL      | BSW      | 162830       | 11.5-( <b>12.0</b> )-12.5      | 32           | 6.4                 | 26.0                 | 13.3                  | 1874           | 51                 | 799           |
| 19         | 235/35R19 | 87Y        | SL      | BSW      | 162850       | 8.0-( <b>8.5</b> )-9.5         | 25           | 6.4                 | 25.7                 | 9.5                   | 1201           | 51                 | 809           |
|            | 245/35R19 | (89Y)      | SL      | BSW      | 181050       | 8.0-( <b>8.5</b> )-9.5         | 26           | 6.3                 | 25.8                 | 9.8                   | 1279           | 51                 | 806           |
|            | 265/30R19 | 93Y        | RD      | BSW      | 168300       | 9.0-( <b>9.5</b> )-10.0        | 26           | 6.4                 | 25.4                 | 10.6                  | 1433           | 50                 | 818           |
|            | 265/35R19 | (94Y)      | SL      | BSW      | 100160       | 9.0-( <b>9.5</b> )-10.5        | 29           | 6.6                 | 26.3                 | 10.7                  | 1477           | 51                 | 789           |
|            | 295/30R19 | 100Y       | RD      | BSW      | 162840       | 10.0-( <b>10.5</b> )-11.0      | 29           | 6.4                 | 26.0                 | 11.7                  | 1764           | 50                 | 798           |
|            | 305/30R19 | 102Y       | RD      | BSW      | 168000       | 10.5-( <b>11.0</b> )-11.5      | 31           | 6.4                 | 26.5                 | 12.0                  | 1874           | 50                 | 784           |
|            | 325/30R19 | (101Y)     | SL      | BSW      | 172760       | 11.0-( <b>11.5</b> )-12.0      | 34           | 6.6                 | 26.7                 | 13.0                  | 1819           | 51                 | 777           |
| 20         | 345/30R19 | (105Y)     | SL      | BSW      | 172780       | 11.5-( <b>12.0</b> )-12.5      | 35           | 6.3                 | 27.2                 | 13.8                  | 2039           | 51                 | 764           |
|            | 285/35R20 | (100Y)     | SL      | BSW      | 162980       | 9.5-( <b>10.0</b> )-11.0       | 32           | 6.3                 | 27.7                 | 11.5                  | 1764           | 51                 | 749           |
|            | 315/30R20 | (101Y)     | SL      | BSW      | 162990       | 10.5-( <b>11.0</b> )-11.5      | 33           | 6.3                 | 27.6                 | 12.5                  | 1819           | 51                 | 754           |

Speed rated "V" = 149mph, "W" = 168mph, "Y" = 186mph, "YV" = 195mph. "SL" = Standard Load, "RD" = Reinforced, "BSW" = Black Sidewall. Bold designates measuring rim width. \*\*Inflated dimensions.



DOT COMPETITION TIRE

Race-ready off the shelf with a 4/32"-deep tread, the Proxes RR delivers consistent lap times and predictable handling on dry tracks. This DOT competition tire\* is ideal for NASA road racing, track days, and high-performance driving schools. The symmetric two-groove tread design and special tread compound provide a maximum contact patch and ultimate dry traction with superior cornering force.

\*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

Race-prepared vehicles in NASA spec classes:  
American Iron  
Honda Challenge  
Spec E30  
Spec Miata  
Spec 944

UTQG  
40 C A



Toyo Tires and the Proxes RR are the official tire of NASA and the spec tire of record in numerous classes.

RACING TREAD COMPOUND

- Increases grip and improves lap times.

REINFORCED SIDEWALL AND HIGH-MODULUS BEAD FILLER

- Provides excellent steering response and feedback.

WEAR INSPECTION HOLES

- Provides easy tread depth measurement from any position.

SIDEWALL MARKING AREA

- Allows for easy labeling on the sidewall.



SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RR:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*\*Inflated dimensions.

| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)** | OVERALL WIDTH (IN.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|----------------------|-----------------------|----------------|--------------------|---------------|
| 13         | 205/60R13  | 86V        | SL      | BSW      | 255150       | 5.5- <b>(6.0)</b> -7.5         | 19           | 3.7                 | 22.7                 | 8.2                   | 1168           | 51                 | 916           |
| 15         | 205/50R15  | -          | SL      | BSW      | 255000       | 5.5- <b>(6.5)</b> -7.5         | 20           | 3.7                 | 23.0                 | 8.5                   | 1168           | 51                 | 902           |
|            | 225/45R15  | -          | SL      | BSW      | 255140       | 7.0- <b>(7.5)</b> -8.5         | 21           | 3.7                 | 23.0                 | 8.9                   | 1201           | 51                 | 905           |
|            | 225/50R15  | -          | SL      | BSW      | 255080       | 6.0- <b>(7.0)</b> -8.0         | 22           | 3.7                 | 23.9                 | 9.2                   | 1356           | 51                 | 869           |
| 16         | 245/45R16  | -          | SL      | BSW      | 255130       | 7.5- <b>(8.0)</b> -9.0         | 23           | 3.7                 | 24.6                 | 9.6                   | 1477           | 51                 | 843           |
| 17         | 235/40R17  | -          | SL      | BSW      | 255120       | 8.0- <b>(8.5)</b> -9.5         | 22           | 3.7                 | 24.4                 | 9.5                   | 1323           | 51                 | 851           |
|            | 255/40R17  | -          | SL      | BSW      | 255110       | 8.5- <b>(9.0)</b> -10.0        | 24           | 3.7                 | 25.0                 | 10.2                  | 1477           | 51                 | 830           |
|            | 275/40R17  | -          | SL      | BSW      | 255100       | 9.0- <b>(9.5)</b> -11.0        | 28           | 3.7                 | 25.7                 | 10.9                  | 1653           | 51                 | 809           |
| 18         | P275/35R18 | 87         | LL      | BSW      | 255070       | 9.0- <b>(9.5)</b> -11.0        | 26           | 3.7                 | 25.6                 | 10.9                  | 1201           | 44                 | 813           |



DOT COMPETITION TIRE

The design and components of the Proxes RA1 came from our experience in winning races all over the world. This DOT competition tire\* is well known by road racers for delivering quick lap times, consistency, and long wear. Full 8/32" tread depth provides good competitive wet traction, while shaving to 4/32" improves dry traction.

\*Caution: Recommended for competition events only.

POPULAR FITMENTS

Race-prepared vehicles such as:  
BMW E30  
Honda Civic  
Honda CRX  
Honda S2000  
Mazda Miata MX-5

UTQG

100 AA A



Toyo Tires is the official tire of NASA and the spec tire of record in numerous classes.

SOFT BUT DURABLE R-COMPOUND


- Improves grip for better competitive handling and performance.

STEPPED TREAD DESIGN

- Increased tread area and limited void improves dry traction.
- Groove arrangement assists with wet traction.

TREAD DEPTH INDICATORS

- Allows for more accurate tread depth measurement near the shoulders.

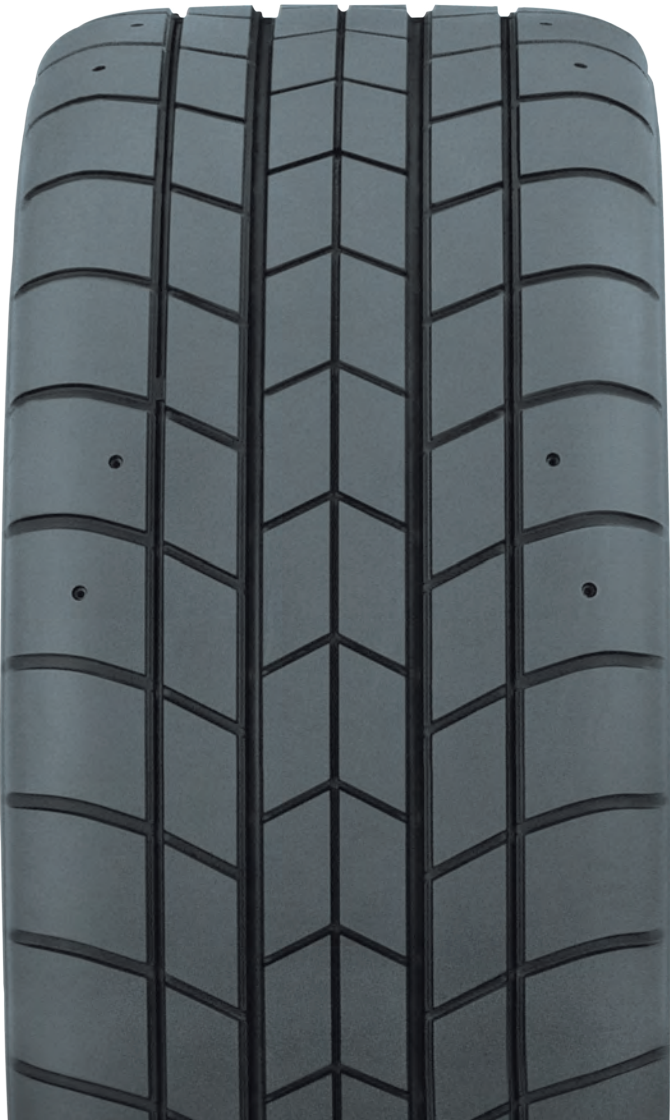

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RA1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

Speed rated "V" = 149mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*\*Inflated dimensions.

| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)** | OVERALL WIDTH (IN.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|----------------------|-----------------------|----------------|--------------------|---------------|
| 13         | 205/60R13  | 86V        | SL      | BSW      | 236700       | 5.5- <b>(6.0)</b> -7.5         | 20           | 8.0                 | 22.7                 | 8.2                   | 1158           | 44                 | 970           |
| 15         | 205/50R15  | -          | SL      | BSW      | 236840       | 5.5- <b>(6.5)</b> -7.5         | 20           | 8.0                 | 23.1                 | 8.4                   | 1135           | 44                 | 917           |
|            | 225/45R15  | -          | SL      | BSW      | 236970       | 7.0- <b>(7.5)</b> -8.5         | 23           | 8.0                 | 22.9                 | 9.0                   | 1201           | 44                 | 908           |
|            | 225/50R15  | -          | SL      | BSW      | 236830       | 6.0- <b>(7.0)</b> -8.0         | 23           | 8.0                 | 23.9                 | 9.2                   | 1323           | 44                 | 886           |
| 16         | 225/50R16  | -          | SL      | BSW      | 236890       | 6.0- <b>(7.0)</b> -8.0         | 23           | 8.0                 | 24.9                 | 9.2                   | 1390           | 44                 | 853           |
|            | 245/45R16  | -          | SL      | BSW      | 236800       | 7.5- <b>(8.0)</b> -9.0         | 25           | 8.0                 | 24.7                 | 9.6                   | 1477           | 44                 | 861           |
|            | P255/50R16 | -          | SL      | BSW      | 236880       | 7.0- <b>(8.0)</b> -9.0         | 27           | 8.0                 | 26.1                 | 10.4                  | 1687           | 44                 | 815           |
| 17         | 235/40R17  | -          | SL      | BSW      | 236760       | 8.0- <b>(8.5)</b> -9.5         | 24           | 8.0                 | 24.4                 | 9.6                   | 1323           | 44                 | 852           |
|            | 255/40R17  | -          | SL      | BSW      | 236770       | 8.5- <b>(9.0)</b> -10.0        | 26           | 8.0                 | 25.0                 | 10.4                  | 1477           | 44                 | 828           |
|            | 275/40R17  | -          | SL      | BSW      | 236780       | 9.0- <b>(9.5)</b> -11.0        | 29           | 8.0                 | 25.7                 | 10.9                  | 1653           | 44                 | 812           |
| 18         | 275/35R18  | -          | SL      | BSW      | 236710       | 9.0- <b>(9.5)</b> -11.0        | 30           | 8.0                 | 25.6                 | 10.9                  | 1521           | 44                 | 812           |



FULL-SLICK COMPETITION TIRE

The Proxes RS1 is a full-slick competition tire\* that provides consistent performance throughout the life of the tire. This race tire is excellent in dry braking and built to endure closed-course road racing, time attack, track days, and high performance driving schools. Compound, construction and design contribute to its durability, responsive handling, and high-speed performance in dry weather conditions.

\*Warning: For racing purposes only. Not for highway use.

POPULAR FITMENTS

Camaro  
Mustang  
Nissan GT-R  
Porsche GT3



Toyo Tires is the official tire of NASA and the spec tire of record in numerous classes.

ADVANCED RAYON CASING

- Provides durability and stability at high speed.

HIGH-MODULUS BEAD FILLER AND STEEL REINFORCED SIDEWALL

- Provides crisp and responsive handling.
- Offers excellent steering response and feel.

DURABLE, RACE-PROVEN COMPOUND

- Contributes to excellent dry braking.
- Offers excellent wear resistance.
- Provides high grip levels across a wide temperature range.

SPIRAL WOUND CAP PLY

- Provides uniformity and consistency.



| WHEEL DIA. | TIRE SIZE  | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|-----------------------|----------------|--------------------|---------------|
| 18         | 245/640R18 | SL      | BSW      | 163460       | <b>(8.5)</b>                   | 25           | 25.4                | 9.8                   | -              | -                  | 818           |
|            | 285/650R18 | SL      | BSW      | 171680       | <b>(10.0)</b>                  | 26           | 25.5                | 11.1                  | -              | -                  | 814           |
|            | 285/680R18 | SL      | BSW      | 163450       | <b>(10.0)</b>                  | 31           | 26.7                | 11.7                  | -              | -                  | 778           |
|            | 335/710R18 | SL      | BSW      | 171440       | <b>(12.0)</b>                  | 34           | 27.7                | 13.4                  | -              | -                  | 749           |

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES RS1:

- Operating Temperature: 160°F to 220°F
- Hot Inflation Pressures: High 30s to Low 40s (PSI)
- Camber: -2.5° to -5.0°
- Caster: As much positive as possible

\*"SL" = Standard Load, "BSW" = Black Sidewall.  
Bold designates measuring rim width. \*\*Inflated dimensions.



DOT DRAG RADIAL

This DOT drag radial\* was designed to help muscle cars and street machines transfer power to the ground. An optimized tread design, coupled with a unique tread compound and strengthened radial construction, gives superior grip, straight-line performance, and high-speed stability as you blast down the track. The Proxes TQ is also designed to be quiet on the drive home.

\*Caution: Use extreme caution and reduced speed when driving in wet conditions. Recommended for competition events only.

POPULAR FITMENTS

Race-prepared late-model American muscle cars such as:  
Chevrolet Camaro  
Dodge Challenger  
Ford Mustang  
Pontiac Firebird

UTQG

O B B

DRAG RADIAL  
TREAD COMPOUND

- Maximizes grip at launch.

DUAL-PURPOSE  
ASYMMETRIC TREAD DESIGN

- Optimizes performance for track and street use with two distinct tread areas.

SEMI-SLICK INNER AREA


- Improves traction on independent rear suspension vehicles, while maintaining consistent grip on straight axle rear suspension vehicles.

VARIABLE PITCH OUTER AREA

- Reduces pattern noise when on the street.

DRAG-RACE CONSTRUCTION  
WITH SPECIAL DRAG-RACE  
RADIAL CARCASS

- Helps tire maintain a large, consistent contact patch for increased traction throughout a drag run.

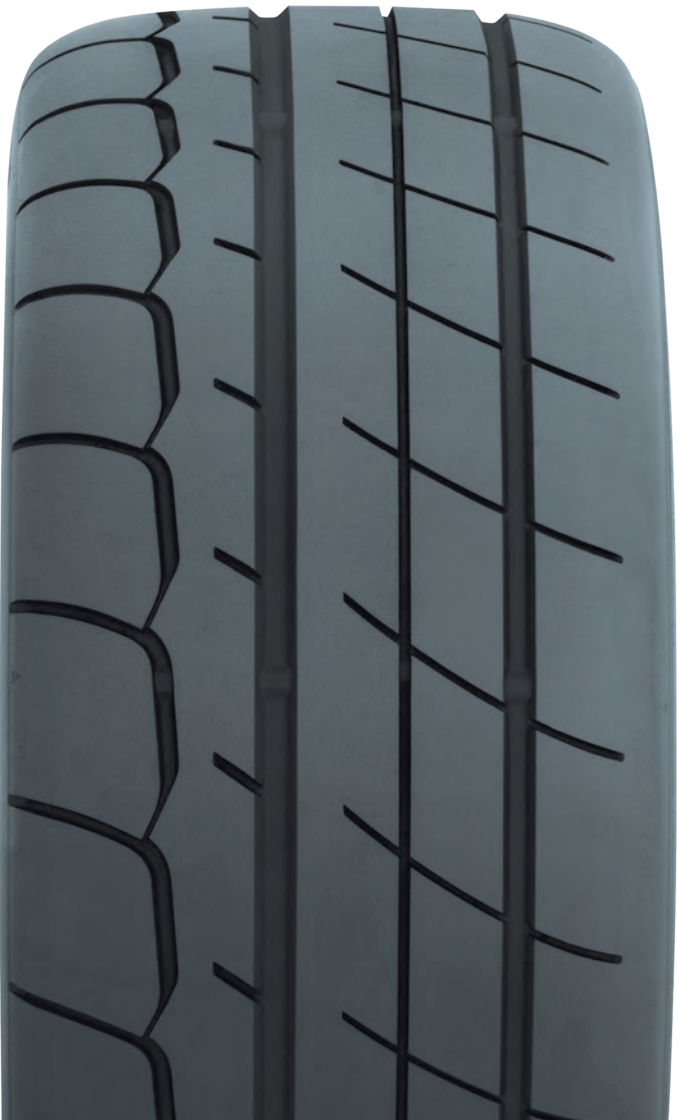

SETUP GUIDELINES

TOYO TIRES RECOMMENDS THE FOLLOWING GENERAL SETUP GUIDELINES FOR THE PROXES TQ:

- Minimum Inflation Pressure for the Track: 15 PSI
- Recommended Inflation Pressure: Start with a cold tire inflation pressure of 17 PSI. Adjust the tire inflation pressure up or down in 1-PSI increments to achieve the desired results. Use as much pressure as possible for track conditions without causing the tire to slip. Higher inflation pressures will improve reaction time, stability, and rolling resistance.

"LL" = Light Load, "SL" = Standard Load, "BSW" = Black Sidewall.  
Bold designates measuring rim width. \*\*Inflated dimensions.

| WHEEL DIA. | TIRE SIZE  | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)** | OVERALL WIDTH (IN.)** | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|----------------------|-----------------------|----------------|--------------------|---------------|
| 16         | P255/50R16 | SL      | BSW      | 172020       | 7.0- <b>(8.0)</b> -9.0         | 28           | 6.4                 | 26.1                 | 10.4                  | 1687           | 44                 | 796           |
|            | P275/45R16 | LL      | BSW      | 172070       | 8.5- <b>(9.0)</b> -10.5        | 27           | 6.4                 | 25.8                 | 10.8                  | 1477           | 44                 | 806           |
| 17         | P275/40R17 | LL      | BSW      | 172010       | 9.0- <b>(9.5)</b> -11.0        | 28           | 6.4                 | 25.8                 | 11.0                  | 1433           | 44                 | 805           |
|            | P315/35R17 | LL      | BSW      | 172030       | 10.5- <b>(11.0)</b> -12.5      | 31           | 6.4                 | 25.6                 | 12.6                  | 1433           | 44                 | 813           |
|            | P345/40R17 | LL      | BSW      | 172050       | 11.5- <b>(12.0)</b> -13.5      | 36           | 6.4                 | 27.7                 | 13.7                  | 2094           | 44                 | 749           |
| 18         | P315/35R18 | LL      | BSW      | 172060       | 10.5- <b>(11.0)</b> -12.5      | 31           | 6.4                 | 26.6                 | 12.5                  | 1521           | 44                 | 780           |



PASSENGER CAR

# COMFORT

A blue-tinted photograph of a modern sedan driving on a road. The car is shown from a side-rear perspective, moving towards the right. The background features a road with white lane markings and a hilly landscape under a clear sky. The word 'COMFORT' is overlaid in large, bold, white capital letters across the center of the image.



PASSENGER CAR

VERSADO NOIR



LUXURY TOURING  
ALL-SEASON

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 3.5 |
| WET HANDLING       | 4.0 |
| RIDE COMFORT       | 5.0 |
| QUIET RIDE         | 5.0 |
| TREAD LIFE         | 5.0 |
| WINTER HANDLING    | 4.0 |
| ROLLING RESISTANCE | 4.5 |

UTQG

620 A A

VEHICLE & APPLICATION SEGMENT

Luxury Sedans  
Direct OE Replacement

SPEED RATING

H-V-W

WHEEL DIAMETER

15"-16"-17"-18"

VERSADO ECO



ECO TOURING  
ALL-SEASON

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 3.0 |
| WET HANDLING       | 4.0 |
| RIDE COMFORT       | 5.0 |
| QUIET RIDE         | 5.0 |
| TREAD LIFE         | 4.0 |
| WINTER HANDLING    | 3.0 |
| ROLLING RESISTANCE | 5.0 |

UTQG

400 A A

VEHICLE & APPLICATION SEGMENT

Direct OE Replacement

SPEED RATING

T-H-V-W

WHEEL DIAMETER

15"-16"-17"-18"

EXTENSA HP



HIGH PERFORMANCE  
ALL-SEASON

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 3.5 |
| WET HANDLING       | 4.0 |
| RIDE COMFORT       | 3.0 |
| QUIET RIDE         | 4.0 |
| TREAD LIFE         | 3.5 |
| WINTER HANDLING    | 2.5 |
| ROLLING RESISTANCE | 3.5 |

UTQG

360 A A

VEHICLE & APPLICATION SEGMENT

Direct OE Replacement  
Plus Sizing

SPEED RATING

V-W

WHEEL DIAMETER

15"-16"-17"-18"-20"-22"

EXTENSA A/S



PASSENGER  
ALL-SEASON

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 3.0 |
| WET HANDLING       | 3.5 |
| RIDE COMFORT       | 4.5 |
| QUIET RIDE         | 4.0 |
| TREAD LIFE         | 4.5 |
| WINTER HANDLING    | 4.0 |
| ROLLING RESISTANCE | 4.0 |

UTQG

S/T-Rated: 620 A B  
H-Rated: 360 A A

VEHICLE & APPLICATION SEGMENT

Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

13"-14"-15"-16"-17"

PASSENGER CAR:

This luxury performance line balances comfort, performance, and long tread life with sizes for passenger cars, crossovers, minivans, and hybrids. Offered with our No Regrets Trial Offer, sell it with confidence.



CELSIUS



VARIABLE-CONDITIONS

|                    |     |
|--------------------|-----|
| DRY HANDLING       | 3.0 |
| WET HANDLING       | 3.5 |
| RIDE COMFORT       | 4.5 |
| QUIET RIDE         | 3.5 |
| TREAD LIFE         | 4.0 |
| WINTER HANDLING    | 5.0 |
| ROLLING RESISTANCE | 4.0 |
| SNOW TRACTION      | 5.0 |
| ICE TRACTION       | 5.0 |

UTQG

S-Rated: 400 A B  
T-Rated: 420 A B, 440 A B  
H-Rated: 440 A A

VEHICLE & APPLICATION SEGMENT

Passenger Cars  
Luxury Cars  
Direct OE Replacement

SPEED RATING

S-T-H

WHEEL DIAMETER

14"-15"-16"-17"





LUXURY TOURING ALL-SEASON TIRE

The Versado Noir is our premium, all-season touring tire for sedans and coupes. It offers over 30% more tread life than a leading competitor\* plus improved fuel efficiency and a quiet, comfortable ride throughout the life of the tire.

POPULAR FITMENTS

Audi A6  
BMW 3-series  
Cadillac CTS  
Lexus LS 460  
Toyota Camry

UTQG

H/V/W-rated: 620 A A



This ecology mark is applied to products that focus on improved fuel economy.

IMPROVED SILICA COMPOUND

- Increases tread life.
- Enhances wet performance.
- Improves fuel efficiency.

RIGID OUTSIDE TREAD

- Stabilizes tread blocks for quieter ride and improved wear.

HIGHER SIPE DENSITY ON INSIDE TREAD

- Provides more biting edges for increased traction in the snow.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves snow traction.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 195/60R15 | 88H        | SL      | BSW      | 136200       | 5.5-(6.0)-7.0                  | 19           | 10.8                | 24.2                | 7.9                  | 1235           | 51                 | 858           |
|            | 195/60R15 | 88V        | SL      | BSW      | 136210       | 5.5-(6.0)-7.0                  | 20           | 10.2                | 24.2                | 7.9                  | 1235           | 51                 | 858           |
|            | 195/65R15 | 91H        | SL      | BSW      | 136220       | 5.5-(6.0)-7.0                  | 19           | 11.0                | 25.0                | 7.9                  | 1356           | 51                 | 831           |
|            | 205/60R15 | 91H        | SL      | BSW      | 136230       | 5.5-(6.0)-7.5                  | 21           | 11.0                | 24.7                | 8.2                  | 1356           | 51                 | 842           |
|            | 205/65R15 | 94H        | SL      | BSW      | 136240       | 5.5-(6.0)-7.5                  | 21           | 11.1                | 25.5                | 8.2                  | 1477           | 51                 | 816           |
|            | 205/70R15 | 96H        | SL      | BSW      | 136250       | 5.0-(6.0)-7.0                  | 22           | 11.2                | 26.3                | 8.2                  | 1565           | 51                 | 789           |
|            | 215/70R15 | 98H        | SL      | BSW      | 136260       | 5.5-(6.5)-7.0                  | 24           | 11.3                | 26.9                | 8.7                  | 1653           | 51                 | 773           |
| 16         | 205/55R16 | 91H        | SL      | BSW      | 136270       | 5.5-(6.5)-7.5                  | 21           | 10.6                | 24.9                | 8.4                  | 1356           | 51                 | 835           |
|            | 205/55R16 | 91V        | SL      | BSW      | 136280       | 5.5-(6.5)-7.5                  | 20           | 10.0                | 24.9                | 8.4                  | 1356           | 51                 | 835           |
|            | 205/60R16 | 92H        | SL      | BSW      | 136290       | 5.5-(6.0)-7.5                  | 22           | 11.0                | 25.7                | 8.2                  | 1389           | 51                 | 809           |
|            | 205/60R16 | 92V        | SL      | BSW      | 136300       | 5.5-(6.0)-7.5                  | 22           | 10.3                | 25.7                | 8.2                  | 1389           | 51                 | 809           |
|            | 205/65R16 | 95H        | SL      | BSW      | 136310       | 5.5-(6.0)-7.5                  | 23           | 11.1                | 26.5                | 8.2                  | 1521           | 51                 | 785           |
|            | 215/55R16 | 93H        | SL      | BSW      | 136320       | 6.0-(7.0)-7.5                  | 22           | 10.7                | 25.3                | 8.9                  | 1433           | 51                 | 822           |
|            | 215/60R16 | 95H        | SL      | BSW      | 136330       | 6.0-(6.5)-7.5                  | 23           | 11.1                | 26.1                | 8.7                  | 1521           | 51                 | 795           |
|            | 215/65R16 | 102H       | XL      | BSW      | 136340       | 6.0-(6.5)-7.5                  | 24           | 11.2                | 27.0                | 8.7                  | 1874           | 50                 | 769           |
|            | 225/50R16 | 92V        | SL      | BSW      | 136350       | 6.0-(7.0)-8.0                  | 21           | 10.2                | 24.9                | 9.2                  | 1389           | 51                 | 835           |
|            | 225/55R16 | 95V        | SL      | BSW      | 136360       | 6.0-(7.0)-8.0                  | 22           | 10.2                | 25.7                | 9.2                  | 1521           | 51                 | 807           |
|            | 225/60R16 | 98H        | SL      | BSW      | 136370       | 6.0-(6.5)-8.0                  | 25           | 11.2                | 26.6                | 9.0                  | 1653           | 51                 | 781           |
|            | 225/65R16 | 100H       | SL      | BSW      | 136380       | 6.0-(6.5)-8.0                  | 25           | 11.3                | 27.5                | 9.0                  | 1764           | 51                 | 756           |
|            | 235/60R16 | 100H       | SL      | BSW      | 136390       | 6.5-(7.0)-8.5                  | 27           | 11.3                | 27.1                | 9.4                  | 1764           | 51                 | 767           |
|            | 235/65R16 | 103H       | SL      | BSW      | 136400       | 6.5-(7.0)-8.5                  | 27           | 11.5                | 28.0                | 9.4                  | 1929           | 51                 | 741           |
| 17         | 205/50R17 | 93V        | XL      | BSW      | 136410       | 5.5-(6.5)-7.5                  | 20           | 10.0                | 25.1                | 8.4                  | 1433           | 50                 | 827           |
|            | 215/50R17 | 95V        | XL      | BSW      | 136420       | 6.0-(7.0)-7.5                  | 22           | 10.1                | 25.5                | 8.9                  | 1521           | 50                 | 814           |
|            | 215/55R17 | 94V        | SL      | BSW      | 136430       | 6.0-(7.0)-7.5                  | 22           | 10.1                | 26.3                | 8.9                  | 1477           | 51                 | 790           |
|            | 215/60R17 | 96H        | SL      | BSW      | 136440       | 6.0-(6.5)-7.5                  | 25           | 11.1                | 27.2                | 8.7                  | 1565           | 51                 | 765           |
|            | 215/65R17 | 99H        | SL      | BSW      | 136450       | 6.0-(6.5)-7.5                  | 27           | 11.2                | 28.0                | 8.7                  | 1709           | 51                 | 741           |
|            | 225/45R17 | 94H        | XL      | BSW      | 136460       | 7.0-(7.5)-8.5                  | 22           | 10.8                | 25.0                | 8.9                  | 1477           | 50                 | 832           |
|            | 225/50R17 | 94V        | SL      | BSW      | 136470       | 6.0-(7.0)-8.0                  | 22           | 10.2                | 25.9                | 9.2                  | 1477           | 51                 | 802           |
|            | 225/50R17 | 94W        | SL      | BSW      | 136480       | 6.0-(7.0)-8.0                  | 22           | 10.2                | 25.9                | 9.2                  | 1477           | 51                 | 802           |
|            | 225/55R17 | 97H        | SL      | BSW      | 136490       | 6.0-(7.0)-8.0                  | 24           | 10.8                | 26.8                | 9.2                  | 1609           | 51                 | 776           |
|            | 225/60R17 | 99H        | SL      | BSW      | 136500       | 6.0-(6.5)-8.0                  | 27           | 11.2                | 27.6                | 9.0                  | 1709           | 51                 | 752           |
|            | 235/45R17 | 97H        | XL      | BSW      | 136510       | 7.5-(8.0)-9.0                  | 24           | 11.0                | 25.4                | 9.3                  | 1609           | 50                 | 819           |
|            | 235/45R17 | 97W        | XL      | BSW      | 136520       | 7.5-(8.0)-9.0                  | 25           | 10.3                | 25.4                | 9.3                  | 1609           | 50                 | 819           |
|            | 235/50R17 | 96V        | SL      | BSW      | 136530       | 6.5-(7.5)-8.5                  | 26           | 10.3                | 26.3                | 9.6                  | 1565           | 51                 | 790           |
|            | 235/55R17 | 99H        | SL      | BSW      | 136540       | 6.5-(7.5)-8.5                  | 26           | 11.0                | 27.2                | 9.6                  | 1709           | 51                 | 765           |
|            | 245/45R17 | 99H        | XL      | BSW      | 136550       | 7.5-(8.0)-9.0                  | 22           | 11.1                | 25.7                | 9.6                  | 1709           | 50                 | 809           |
|            | 245/50R17 | 99V        | SL      | BSW      | 136560       | 7.0-(7.5)-8.5                  | 27           | 10.5                | 26.7                | 10.0                 | 1709           | 51                 | 778           |
| 18         | 215/55R18 | 95H        | SL      | BSW      | 136570       | 6.0-(7.0)-7.5                  | 25           | 10.7                | 27.3                | 8.9                  | 1521           | 51                 | 761           |
|            | 225/40R18 | 92V        | XL      | BSW      | 136720       | 7.5-(8.0)-9.0                  | 21           | 10.2                | 25.1                | 9.1                  | 1389           | 50                 | 828           |
|            | 225/45R18 | 95V        | XL      | BSW      | 136010       | 7.0-(7.5)-8.5                  | 22           | 10.2                | 25.9                | 8.9                  | 1521           | 50                 | 801           |
|            | 225/60R18 | 100H       | SL      | BSW      | 136600       | 6.0-(6.5)-8.0                  | 29           | 11.2                | 28.6                | 9.0                  | 1764           | 51                 | 726           |
|            | 235/45R18 | 94V        | SL      | BSW      | 136610       | 7.5-(8.0)-9.0                  | 27           | 10.3                | 26.3                | 9.3                  | 1477           | 51                 | 789           |
|            | 235/50R18 | 97V        | SL      | BSW      | 136620       | 6.5-(7.5)-8.5                  | 26           | 10.3                | 27.3                | 9.6                  | 1609           | 51                 | 761           |
|            | 235/55R18 | 100V       | SL      | BSW      | 136630       | 6.5-(7.5)-8.5                  | 27           | 10.3                | 28.2                | 9.6                  | 1764           | 51                 | 738           |
|            | 245/40R18 | 93V        | SL      | BSW      | 136640       | 8.0-(8.5)-9.5                  | 23           | 10.5                | 25.7                | 9.8                  | 1433           | 51                 | 808           |
|            | 245/45R18 | 96V        | SL      | BSW      | 136650       | 7.5-(8.0)-9.0                  | 25           | 10.5                | 26.7                | 9.6                  | 1565           | 51                 | 779           |
|            | 245/50R18 | 100V       | SL      | BSW      | 136660       | 7.0-(7.5)-8.5                  | 28           | 10.5                | 27.7                | 10.0                 | 1764           | 51                 | 751           |

\*Mileage projection based upon commissioned third-party test results. Test conducted on 215/60R16 tires. Individual results may vary.

Speed rated "H" = 130mph, "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



ECO TOURING ALL-SEASON TIRE

The Versado Eco was created to improve fuel efficiency for hybrid, electric, and other environmentally friendly vehicles, while maintaining a smooth, quiet ride. It also uses naturally-derived tread compound materials and recycled polyester to help make daily driving easier on the environment.

POPULAR FITMENTS

Chevrolet Cruze Eco  
Chevrolet Volt  
Ford Fusion Hybrid  
Toyota Camry Hybrid  
Toyota Prius  
Volkswagen Passat TDI

UTQG  
400 A A



This ecology mark is applied to products that focus on improved fuel economy.

LOW ROLLING RESISTANCE COMPOUND

- Improves fuel efficiency.
- Increases tread life.

SILENT WALL™ TECHNOLOGY

- Provides a quieter ride by reducing pipe resonance.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves snow traction.

FOUR CIRCUMFERENTIAL GROOVES

- Evacuates water to improve wet performance.

RECYCLED POLYESTER CASING

- Offers same quality and performance as newly manufactured polyester material.
- Saves natural resources.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 175/65R15  | 84T        | SL      | BSW      | 113000       | (5.0)-6.0                      | 16           | 9.4                 | 24.2                | 6.9                  | 1102           | 44                 | 858           |
|            | P185/65R15 | 86T        | SL      | BSW      | 113010       | 5.0-(5.5)-6.5                  | 17           | 9.7                 | 24.6                | 7.3                  | 1168           | 44                 | 844           |
|            | P195/65R15 | 89H        | SL      | BSW      | 113020       | 5.5-(6.0)-7.0                  | 19           | 9.7                 | 25.0                | 7.9                  | 1279           | 51                 | 831           |
| 16         | P195/55R16 | 86V        | SL      | BSW      | 113030       | 5.5-(6.0)-7.0                  | 19           | 9.6                 | 24.4                | 7.8                  | 1168           | 51                 | 851           |
|            | P215/60R16 | 94V        | SL      | BSW      | 113050       | 6.0-(6.5)-7.5                  | 24           | 10.2                | 26.2                | 8.7                  | 1477           | 51                 | 792           |
| 17         | P215/45R17 | 87V        | SL      | BSW      | 113070       | (7.0)-8.0                      | 20           | 9.8                 | 24.6                | 8.4                  | 1201           | 51                 | 843           |
|            | P215/55R17 | 93V        | SL      | BSW      | 113060       | 6.0-(7.0)-7.5                  | 24           | 9.8                 | 26.2                | 8.7                  | 1433           | 51                 | 793           |
|            | P225/50R17 | 93V        | SL      | BSW      | 113080       | 6.0-(7.0)-8.0                  | 24           | 10.0                | 25.9                | 9.2                  | 1433           | 51                 | 802           |
| 18         | P225/45R18 | 91W        | SL      | BSW      | 113090       | 7.0-(7.5)-8.5                  | 23           | 10.0                | 26.0                | 9.0                  | 1356           | 51                 | 798           |



Speed rated "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



HIGH PERFORMANCE ALL-SEASON TIRE

The Extensa HP delivers all-season handling; a comfortable ride. Designed with value in mind, this high performance all-season tire offers the quality and styling you expect from Toyo Tires.

POPULAR FITMENTS

Ford Focus  
Infiniti G35  
Mitsubishi Eclipse  
Mitsubishi Lancer  
Scion tC  
Subaru Impreza WRX

UTQG  
360 A A

UNIDIRECTIONAL TREAD DESIGN

- Provides good all-season traction and modern styling.

SILENT WALL™ TECHNOLOGY

- Reduces pipe resonance, resulting in a quieter ride.

INTERLOCKING TREAD BLOCKS

- Enhances directional stability and cornering performance.

MULTIFUNCTION TAPER

- Enhances cornering performance.
- Assists in water dispersion.
- Increases tread life.

FOUR WIDE CIRCUMFERENTIAL GROOVES

- Evacuates water to improve wet performance.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (in.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (in.)* | OVERALL WIDTH (in.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 195/50R15  | 86V        | XL      | BSW      | 195300       | 5.5-(6.0)-7.0                  | 17           | 9.3                 | 22.6                | 7.7                  | 1168           | 50                 | 918           |
|            | P195/55R15 | 84V        | SL      | BSW      | 195310       | 5.5-(6.0)-7.0                  | 17           | 9.3                 | 23.3                | 7.7                  | 1102           | 51                 | 890           |
| 16         | 185/55R16  | 83V        | SL      | BSW      | 195810       | 5.0-(6.0)-6.5                  | 17           | 9.2                 | 24.0                | 7.6                  | 1074           | 51                 | 865           |
|            | 195/50R16  | 84V        | SL      | BSW      | 195650       | 5.5-(6.0)-7.0                  | 18           | 9.3                 | 23.7                | 7.7                  | 1102           | 51                 | 875           |
|            | 195/55R16  | 87V        | SL      | BSW      | 195670       | 5.5-(6.0)-7.0                  | 19           | 9.3                 | 24.4                | 7.9                  | 1201           | 51                 | 851           |
|            | 205/45R16  | 87V        | XL      | BSW      | 195320       | 6.5-(7.0)-7.5                  | 18           | 9.4                 | 23.2                | 8.0                  | 1201           | 50                 | 896           |
|            | 205/50R16  | 91V        | XL      | BSW      | 195330       | 5.5-(6.5)-7.5                  | 20           | 9.4                 | 24.1                | 8.2                  | 1356           | 50                 | 864           |
|            | 205/55R16  | 91V        | SL      | BSW      | 195660       | 5.5-(6.5)-7.5                  | 21           | 9.4                 | 24.9                | 8.4                  | 1356           | 51                 | 835           |
|            | 205/55R16  | 94V        | XL      | BSW      | 195510       | 5.5-(6.5)-7.5                  | 20           | 9.4                 | 25.0                | 8.3                  | 1477           | 50                 | 831           |
|            | 215/55R16  | 97V        | XL      | BSW      | 195530       | 6.0-(7.0)-7.5                  | 21           | 9.6                 | 25.2                | 8.9                  | 1609           | 50                 | 826           |
|            | P225/50R16 | 91V        | SL      | BSW      | 195340       | 6.0-(7.0)-8.0                  | 22           | 9.7                 | 24.8                | 9.1                  | 1367           | 51                 | 839           |
|            | P225/55R16 | 94V        | SL      | BSW      | 195350       | 6.0-(7.0)-8.0                  | 22           | 9.7                 | 25.6                | 9.0                  | 1477           | 51                 | 812           |
| 17         | 205/40R17  | 84V        | XL      | BSW      | 195420       | 7.0-(7.5)-8.0                  | 18           | 9.4                 | 23.5                | 8.4                  | 1102           | 50                 | 882           |
|            | 205/50R17  | 93V        | XL      | BSW      | 195370       | 5.5-(6.5)-7.5                  | 21           | 9.4                 | 25.1                | 8.2                  | 1433           | 50                 | 827           |
|            | 215/45R17  | 91V        | XL      | BSW      | 195380       | (7.0)-8.0                      | 21           | 9.6                 | 24.6                | 8.2                  | 1356           | 50                 | 843           |
|            | 215/50R17  | 95V        | XL      | BSW      | 195520       | 6.0-(7.0)-7.5                  | 25           | 9.6                 | 25.5                | 8.7                  | 1521           | 50                 | 816           |
|            | P215/55R17 | 93V        | SL      | BSW      | 195430       | 6.0-(7.0)-7.5                  | 23           | 9.6                 | 26.3                | 8.7                  | 1433           | 51                 | 789           |
|            | 225/45R17  | 94V        | XL      | BSW      | 195390       | 7.0-(7.5)-8.5                  | 22           | 9.7                 | 24.9                | 8.7                  | 1477           | 50                 | 835           |
|            | P225/50R17 | 93V        | SL      | BSW      | 195440       | 6.0-(7.0)-8.0                  | 24           | 9.7                 | 25.9                | 8.9                  | 1433           | 51                 | 802           |
|            | P225/55R17 | 95V        | SL      | BSW      | 195360       | 6.0-(7.0)-8.0                  | 25           | 9.7                 | 26.7                | 9.0                  | 1521           | 51                 | 778           |
|            | 235/45R17  | 97V        | XL      | BSW      | 195400       | 7.5-(8.0)-9.0                  | 22           | 9.8                 | 25.2                | 9.1                  | 1609           | 50                 | 823           |
|            | 235/55R17  | 99W        | SL      | BSW      | 195740       | 6.5-(7.5)-8.5                  | 28           | 9.8                 | 27.2                | 9.6                  | 1709           | 51                 | 765           |
|            | 245/40R17  | 95W        | XL      | BSW      | 195690       | 8.0-(8.5)-9.5                  | 22           | 10.0                | 24.7                | 9.5                  | 1521           | 50                 | 840           |
|            | P245/45R17 | 95W        | SL      | BSW      | 195410       | 7.5-(8.0)-9.0                  | 24           | 10.0                | 25.6                | 9.4                  | 1521           | 51                 | 813           |
|            | 255/40R17  | 98W        | XL      | BSW      | 195750       | 8.5-(9.0)-10.0                 | 24           | 10.1                | 25.0                | 10.0                 | 1653           | 50                 | 830           |
|            | 215/35R18  | 84V        | XL      | BSW      | 195470       | 7.0-(7.5)-8.5                  | 19           | 9.6                 | 24.0                | 8.5                  | 1102           | 50                 | 866           |
| 18         | 225/40R18  | 92V        | XL      | BSW      | 195450       | 7.5-(8.0)-9.0                  | 22           | 9.7                 | 25.1                | 8.9                  | 1389           | 50                 | 827           |
|            | 225/50R18  | 99W        | XL      | BSW      | 195760       | 6.0-(7.0)-8.0                  | 27           | 9.7                 | 26.9                | 8.9                  | 1709           | 50                 | 773           |
|            | 235/40R18  | 95V        | XL      | BSW      | 195460       | 8.0-(8.5)-9.5                  | 23           | 9.8                 | 25.4                | 9.4                  | 1521           | 50                 | 817           |
|            | 235/50R18  | 101W       | XL      | BSW      | 195550       | 6.5-(7.5)-8.5                  | 28           | 9.8                 | 27.2                | 9.4                  | 1819           | 50                 | 764           |
|            | 245/40R18  | 97W        | XL      | BSW      | 195500       | 8.0-(8.5)-9.5                  | 24           | 10.0                | 25.7                | 9.6                  | 1609           | 50                 | 808           |
|            | 245/45R18  | 100W       | XL      | BSW      | 195570       | 7.5-(8.0)-9.0                  | 28           | 10.0                | 26.7                | 9.6                  | 1764           | 50                 | 779           |
|            | P245/55R18 | 102V       | SL      | BSW      | 195770       | 7.0-(7.5)-8.5                  | 29           | 10.0                | 28.6                | 10.0                 | 1874           | 51                 | 726           |
|            | 255/35R18  | 94W        | XL      | BSW      | 195620       | 8.5-(9.0)-10.0                 | 26           | 10.1                | 25.0                | 10.0                 | 1477           | 50                 | 832           |
|            | 255/45R18  | 103W       | XL      | BSW      | 195780       | 8.0-(8.5)-9.5                  | 30           | 10.1                | 27.0                | 10.0                 | 1929           | 50                 | 768           |
|            | 275/35R18  | 99W        | XL      | BSW      | 195630       | 9.0-(9.5)-11.0                 | 27           | 10.3                | 25.5                | 10.7                 | 1709           | 50                 | 814           |
| 20         | 225/30R20  | 85W        | XL      | BSW      | 195590       | (8.0)                          | 20           | 9.7                 | 25.4                | 8.8                  | 1135           | 50                 | 818           |
|            | 225/35R20  | 90V        | XL      | BSW      | 195490       | 7.5-(8.0)-9.0                  | 21           | 9.7                 | 26.3                | 8.9                  | 1323           | 50                 | 791           |
|            | 245/35R20  | 95V        | XL      | BSW      | 195480       | 8.0-(8.5)-9.5                  | 24           | 10.0                | 26.8                | 9.5                  | 1521           | 50                 | 776           |
|            | 245/40R20  | 99W        | XL      | BSW      | 195610       | 8.0-(8.5)-9.5                  | 28           | 10.0                | 27.7                | 9.6                  | 1709           | 50                 | 749           |
|            | 255/35R20  | 97W        | XL      | BSW      | 195580       | 8.5-(9.0)-10.0                 | 27           | 10.1                | 26.9                | 10.0                 | 1609           | 50                 | 771           |
|            | 275/30R20  | 97W        | XL      | BSW      | 195790       | 9.0-(9.5)-10.0                 | 28           | 10.3                | 26.5                | 10.7                 | 1609           | 50                 | 783           |
| 22         | 265/35R22  | 102V       | XL      | BSW      | 195540       | 9.0-(9.5)-10.5                 | 32           | 10.2                | 29.4                | 10.5                 | 1874           | 50                 | 707           |

Speed rated "V" = 149mph, "W" = 168mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



PASSENGER ALL-SEASON TIRE

The Extensa A/S provides all-season performance in dry, wet, or snowy conditions for a wide range of passenger cars and minivans. A comfortable ride and extended tread life add to the value of this Toyo tire.

POPULAR FITMENTS

Chevrolet Cruze  
Ford Focus  
Honda Civic  
Hyundai Elantra  
Kia Rio

UTQG

S/T-rated: 620 A B  
H-rated: 360 A A

SYMMETRIC TREAD DESIGN

- Enables cross rotation to reduce irregular wear.
- Improves all-season traction and tire life.

OPTIMIZED CENTER BLOCK ARRANGEMENT

- Variable-pitch angles provide good road contact for increased ride comfort.

FOUR WIDE CIRCUMFERENTIAL GROOVES AND VARIABLE PITCH CHANNELS

- Evacuates water to improve wet traction.

SHOULDER RIB

- Minimizes irregular wear.
- Increases stability.

MULTI-WAVE SIPES

- Minimizes irregular wear for longer tread life and a smooth, quiet ride.
- Improves snow traction.



| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 13         | P155/80R13 | 79S        | SL      | BSW      | 147270       | 4.0-(4.5)-5.0                  | 13           | 10.1                | 22.8                | 6.1                  | 959            | 44                 | 911           |
|            | P175/70R13 | 82T        | SL      | BSW      | 147280       | 4.5-(5.0)-6.0                  | 16           | 11.3                | 22.6                | 6.8                  | 1036           | 44                 | 920           |
|            | P185/70R13 | 85S        | SL      | BSW      | 147290       | 4.5-(5.5)-6.0                  | 17           | 11.5                | 23.2                | 7.4                  | 1135           | 44                 | 896           |
| 14         | P175/65R14 | 81T        | SL      | BSW      | 147380       | (5.0)-6.0                      | 16           | 11.3                | 22.9                | 6.9                  | 1019           | 44                 | 908           |
|            | P185/60R14 | 82H        | SL      | BSW      | 147400       | 5.0-(5.5)-6.5                  | 17           | 10.1                | 22.8                | 7.3                  | 1047           | 51                 | 913           |
|            | P185/65R14 | 85T        | SL      | BSW      | 147710       | 5.0-(5.5)-6.5                  | 18           | 11.5                | 23.4                | 7.3                  | 1124           | 44                 | 887           |
|            | 185/65R14  | 86H        | SL      | BSW      | 147390       | 5.0-(5.5)-6.5                  | 16           | 10.1                | 23.5                | 7.2                  | 1168           | 51                 | 885           |
|            | P185/70R14 | 87T        | SL      | BSW      | 147340       | 4.5-(5.5)-6.0                  | 17           | 11.5                | 24.2                | 7.5                  | 1201           | 44                 | 859           |
|            | P185/75R14 | 89S        | SL      | WW       | 147300       | 4.5-(5.0)-6.0                  | 19           | 11.5                | 25.0                | 7.1                  | 1290           | 44                 | 832           |
|            | 195/60R14  | 86H        | SL      | BSW      | 147410       | 5.5-(6.0)-7.0                  | 17           | 10.2                | 23.2                | 7.7                  | 1168           | 51                 | 896           |
|            | P195/70R14 | 90T        | SL      | BSW      | 147350       | 5.0-(6.0)-6.5                  | 19           | 11.6                | 24.8                | 7.9                  | 1312           | 44                 | 839           |
|            | P195/75R14 | 92S        | SL      | WW       | 147310       | 5.0-(5.5)-6.5                  | 19           | 11.6                | 25.5                | 7.6                  | 1400           | 44                 | 814           |
|            | P205/70R14 | 93T        | SL      | BSW      | 147360       | 5.0-(6.0)-7.0                  | 22           | 11.7                | 25.2                | 8.3                  | 1433           | 44                 | 823           |
| 15         | P205/75R14 | 95S        | SL      | BSW      | 147320       | 5.0-(5.5)-7.0                  | 22           | 11.7                | 26.1                | 7.8                  | 1532           | 44                 | 796           |
|            | P215/70R14 | 96T        | SL      | BSW      | 147370       | 5.5-(6.5)-7.0                  | 23           | 11.8                | 25.8                | 8.8                  | 1554           | 44                 | 806           |
|            | P215/75R14 | 98S        | SL      | BSW      | 147330       | 5.5-(6.0)-7.0                  | 24           | 11.8                | 26.7                | 8.3                  | 1664           | 44                 | 778           |
|            | P185/60R15 | 84T        | SL      | BSW      | 147540       | 5.0-(5.5)-6.5                  | 18           | 11.2                | 23.7                | 7.4                  | 1102           | 44                 | 878           |
|            | 185/65R15  | 88H        | SL      | BSW      | 147500       | 5.0-(5.5)-6.5                  | 18           | 10.1                | 24.4                | 7.3                  | 1235           | 51                 | 851           |
|            | P185/65R15 | 86T        | SL      | BSW      | 147490       | 5.0-(5.5)-6.5                  | 19           | 11.5                | 24.4                | 7.3                  | 1168           | 44                 | 851           |
|            | P195/60R15 | 87T        | SL      | BSW      | 147550       | 5.5-(6.0)-7.0                  | 19           | 11.3                | 24.2                | 7.7                  | 1190           | 44                 | 859           |
|            | P195/65R15 | 89T        | SL      | BSW      | 147510       | 5.5-(6.0)-7.0                  | 19           | 11.6                | 24.9                | 7.8                  | 1279           | 44                 | 833           |
|            | 205/50R15  | 86H        | SL      | BSW      | 147590       | 5.5-(6.5)-7.5                  | 21           | 10.0                | 23.0                | 8.3                  | 1168           | 51                 | 903           |
|            | P205/60R15 | 90T        | SL      | BSW      | 147560       | 5.5-(6.0)-7.5                  | 20           | 11.5                | 24.7                | 8.1                  | 1301           | 44                 | 843           |
| 16         | P205/65R15 | 92T        | SL      | BSW      | 147520       | 5.5-(6.0)-7.5                  | 22           | 11.7                | 25.4                | 7.9                  | 1400           | 44                 | 817           |
|            | P205/70R15 | 95S        | SL      | WW       | 147460       | 5.0-(6.0)-7.0                  | 23           | 11.7                | 26.3                | 8.2                  | 1499           | 44                 | 791           |
|            | P205/75R15 | 97S        | SL      | WW       | 147420       | 5.0-(5.5)-7.0                  | 24           | 11.7                | 27.1                | 7.8                  | 1598           | 44                 | 766           |
|            | P215/60R15 | 93H        | SL      | BSW      | 147570       | 6.0-(6.5)-7.5                  | 22           | 10.5                | 25.1                | 8.6                  | 1411           | 51                 | 828           |
|            | P215/65R15 | 95T        | SL      | BSW      | 147530       | 6.0-(6.5)-7.5                  | 23           | 11.8                | 25.9                | 8.7                  | 1510           | 44                 | 802           |
|            | 215/70R15  | 98T        | SL      | WW       | 147470       | 5.5-(6.5)-7.0                  | 24           | 11.8                | 26.8                | 8.7                  | 1653           | 44                 | 776           |
|            | P215/75R15 | 100S       | SL      | WW       | 147430       | 5.5-(6.0)-7.0                  | 25           | 11.8                | 27.6                | 8.4                  | 1742           | 44                 | 751           |
|            | 225/60R15  | 96H        | SL      | BSW      | 147580       | 6.0-(6.5)-8.0                  | 24           | 10.6                | 25.6                | 8.9                  | 1565           | 51                 | 813           |
|            | P225/70R15 | 100T       | SL      | WW       | 147480       | 6.0-(6.5)-7.5                  | 26           | 12.0                | 27.3                | 9.0                  | 1753           | 44                 | 760           |
|            | P225/75R15 | 102S       | SL      | BSW      | 147440       | (6.0)-7.5                      | 26           | 12.0                | 28.3                | 8.7                  | 1874           | 44                 | 734           |
| 17         | P235/75R15 | 105S       | SL      | WW       | 147450       | 6.0-(6.5)-8.0                  | 28           | 12.1                | 28.9                | 9.1                  | 2028           | 44                 | 720           |
|            | 205/55R16  | 91H        | SL      | BSW      | 147650       | 5.5-(6.5)-7.5                  | 22           | 10.0                | 24.8                | 8.3                  | 1356           | 51                 | 838           |
|            | P205/55R16 | 89T        | SL      | BSW      | 147720       | 5.5-(6.5)-7.5                  | 22           | 11.8                | 24.8                | 8.3                  | 1279           | 44                 | 839           |
|            | P205/60R16 | 91T        | SL      | BSW      | 147630       | 5.5-(6.0)-7.5                  | 21           | 11.5                | 25.7                | 8.1                  | 1356           | 44                 | 809           |
|            | P205/65R16 | 94T        | SL      | BSW      | 147600       | 5.5-(6.0)-7.5                  | 24           | 11.7                | 26.3                | 7.9                  | 1477           | 44                 | 789           |
|            | P215/60R16 | 94T        | SL      | BSW      | 147250       | 6.0-(6.5)-7.5                  | 24           | 11.6                | 26.0                | 8.6                  | 1477           | 44                 | 798           |
|            | 215/65R16  | 98T        | SL      | BSW      | 147610       | 6.0-(6.5)-7.5                  | 24           | 11.8                | 26.9                | 8.7                  | 1653           | 44                 | 772           |
|            | P225/55R16 | 94T        | SL      | BSW      | 147660       | 6.0-(7.0)-8.0                  | 26           | 11.2                | 25.7                | 9.1                  | 1477           | 44                 | 809           |
|            | 225/55R16  | 99H        | XL      | BSW      | 147800       | 6.0-(7.0)-8.0                  | 28           | 10.2                | 25.7                | 9.2                  | 1709           | 50                 | 807           |
|            | P225/60R16 | 97T        | SL      | BSW      | 147260       | 6.0-(6.5)-8.0                  | 24           | 11.7                | 26.6                | 9.1                  | 1609           | 44                 | 782           |
| 18         | 225/65R16  | 100T       | SL      | BSW      | 147730       | 6.0-(6.5)-8.0                  | 29           | 11.8                | 27.5                | 9.0                  | 1764           | 44                 | 756           |
|            | P235/60R16 | 99T        | SL      | BSW      | 147640       | 6.5-(7.0)-8.5                  | 28           | 11.7                | 27.0                | 9.3                  | 1709           | 44                 | 769           |
|            | 235/65R16  | 103T       | SL      | BSW      | 147620       | 6.5-(7.0)-8.5                  | 28           | 11.8                | 27.9                | 9.4                  | 1929           | 44                 | 744           |
|            | P215/50R17 | 90T        | SL      | BSW      | 147700       | 6.0-(7.0)-7.5                  | 25           | 11.1                | 25.4                | 8.6                  | 1323           | 44                 | 817           |
|            | P215/60R17 | 95T        | SL      | BSW      | 147670       | 6.0-(6.5)-7.5                  | 27           | 11.6                | 27.1                | 8.6                  | 1521           | 44                 | 766           |
|            | P215/65R17 | 98T        | SL      | BSW      | 147780       | 6.0-(6.5)-7.5                  | 29           | 11.8                | 28.0                | 8.7                  | 1653           | 44                 | 741           |
| 19         | P225/50R17 | 93T        | SL      | BSW      | 147810       | 6.0-(7.0)-8.0                  | 27           | 11.2                | 25.9                | 9.2                  | 1433           | 44                 | 802           |
|            | P225/55R17 | 95T        | SL      | BSW      | 147690       | 6.0-(7.0)-8.0                  | 27           | 11.2                | 26.7                | 9.1                  | 1521           | 44                 | 778           |
|            | P225/60R17 | 98T        | SL      | BSW      | 147680       | 6.0-(6.5)-8.0                  | 28           | 11.7                | 27.6                | 8.9                  | 1653           | 44                 | 754           |
| 20         | P225/60R18 | 99H        | SL      | BSW      | 147790       | 6.0-(6.5)-8.0                  | 30           | 10.6                | 28.6                | 9.0                  | 1709           | 51                 | 726           |

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall, "WW" = White Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



VARIABLE-CONDITIONS TIRE

Toyo Celsius offers year-round versatility plus winter-weather safety in one. This variable-conditions tire offers better ice and snow traction than a typical all-season tire and longer tread life than a winter tire.

POPULAR FITMENTS

Ford Taurus  
Honda Civic  
Hyundai Sonata  
Nissan Altima  
Toyota Camry  
Volkswagen Jetta

UTQG

400 A B - 440 A A

VARIABLE SIPE DENSITY

- Inside Tread: Higher sipe density for excellent traction on ice and snow.
- Outside Tread: Lower sipe density for traction on wet and dry roads.

SNOW CLAWS

- Improves deep snow traction.
- Increases block rigidity for better ice and wet traction.

SLUSH GROOVES

- Increases traction by evacuating slush and snow.

MULTI-WAVE SIPES

- Minimizes irregular wear for a smooth, quiet ride.
- Improves braking on icy, wet and dry roads.



Mountain Snowflake qualified for severe snow conditions.

\*Performance claim based upon commissioned third-party test results. Test conducted on 215/60R16 tires. Snow braking from 30 to 0 mph; ice braking from 15 to 0 mph. Individual results may vary.

| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 14         | 185/65R14 | 86H        | SL      | BSW      | 128240       | 5.0- <b>(5.5)</b> -6.5         | 16           | 10.7                | 23.5                | 7.4                  | 1168           | 51                 | 885           |
|            | 185/60R15 | 84T        | SL      | BSW      | 128250       | 5.0- <b>(5.5)</b> -6.5         | 17           | 10.6                | 23.7                | 7.4                  | 1102           | 44                 | 875           |
|            | 185/65R15 | 88H        | SL      | BSW      | 128270       | 5.0- <b>(5.5)</b> -6.5         | 17           | 10.7                | 24.4                | 7.4                  | 1235           | 51                 | 850           |
|            | 195/60R15 | 88H        | SL      | BSW      | 128260       | 5.5- <b>(6.0)</b> -7.0         | 19           | 10.7                | 24.2                | 7.9                  | 1235           | 51                 | 858           |
| 15         | 195/65R15 | 91H        | SL      | BSW      | 128280       | 5.5- <b>(6.0)</b> -7.0         | 19           | 10.8                | 25.0                | 7.9                  | 1356           | 51                 | 831           |
|            | 205/65R15 | 94H        | SL      | BSW      | 128290       | 5.5- <b>(6.0)</b> -7.5         | 20           | 11.0                | 25.5                | 8.2                  | 1477           | 51                 | 816           |
|            | 205/70R15 | 96T        | SL      | BSW      | 128300       | 5.0- <b>(6.0)</b> -7.0         | 22           | 11.3                | 26.3                | 8.2                  | 1565           | 44                 | 789           |
|            | 205/75R15 | 97S        | SL      | BSW      | 128330       | 5.0- <b>(5.5)</b> -7.0         | 23           | 11.3                | 27.1                | 8.0                  | 1609           | 44                 | 766           |
|            | 215/70R15 | 98T        | SL      | BSW      | 128310       | 5.5- <b>(6.5)</b> -7.0         | 24           | 11.3                | 26.9                | 8.7                  | 1653           | 44                 | 773           |
|            | 225/70R15 | 100T       | SL      | BSW      | 128320       | 6.0- <b>(6.5)</b> -7.5         | 26           | 11.3                | 27.4                | 9.0                  | 1764           | 44                 | 757           |
|            | 235/75R15 | 105S       | SL      | BSW      | 128340       | 6.0- <b>(6.5)</b> -8.0         | 29           | 11.3                | 28.9                | 9.3                  | 2039           | 44                 | 720           |
|            | 205/55R16 | 91H        | SL      | BSW      | 128350       | 5.5- <b>(6.5)</b> -7.5         | 20           | 10.7                | 24.9                | 8.4                  | 1356           | 51                 | 835           |
|            | 205/60R16 | 92H        | SL      | BSW      | 128360       | 5.5- <b>(6.0)</b> -7.5         | 21           | 10.8                | 25.7                | 8.2                  | 1389           | 51                 | 809           |
| 16         | 205/65R16 | 95H        | SL      | BSW      | 128400       | 5.5- <b>(6.0)</b> -7.5         | 22           | 11.0                | 26.5                | 8.2                  | 1521           | 51                 | 785           |
|            | 215/60R16 | 95H        | SL      | BSW      | 128370       | 6.0- <b>(6.5)</b> -7.5         | 24           | 11.0                | 26.1                | 8.7                  | 1521           | 51                 | 795           |
|            | 215/65R16 | 98T        | SL      | BSW      | 128410       | 6.0- <b>(6.5)</b> -7.5         | 25           | 11.1                | 27.0                | 8.7                  | 1653           | 44                 | 769           |
|            | 225/60R16 | 98H        | SL      | BSW      | 128380       | 6.0- <b>(6.5)</b> -8.0         | 25           | 11.1                | 26.6                | 9.0                  | 1653           | 51                 | 781           |
|            | 235/60R16 | 100T       | SL      | BSW      | 128390       | 6.5- <b>(7.0)</b> -8.5         | 27           | 11.2                | 27.1                | 9.4                  | 1764           | 44                 | 767           |
|            | 235/65R16 | 103T       | SL      | BSW      | 128420       | 6.5- <b>(7.0)</b> -8.5         | 28           | 11.3                | 28.0                | 9.4                  | 1929           | 44                 | 741           |
|            | 215/50R17 | 91H        | SL      | BSW      | 128430       | 6.0- <b>(7.0)</b> -7.5         | 22           | 10.8                | 25.5                | 8.9                  | 1356           | 51                 | 814           |
| 17         | 215/60R17 | 96H        | SL      | BSW      | 128440       | 6.0- <b>(6.5)</b> -7.5         | 25           | 11.0                | 27.2                | 8.7                  | 1565           | 51                 | 765           |

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



WINTER

# CONFIDENCE



| OBSERVE GSI-5                                                                                                        | OBSERVE GARIT KX                                                                                  | OBSERVE G3-ICE                                                                                                       | OPEN COUNTRY WLT1                                                                     |
|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                     |                  |                                    |    |
| STUDLESS<br>PASSENGER/CUV/SUV<br>WINTER                                                                              | STUDLESS<br>PERFORMANCE<br>WINTER                                                                 | STUDDABLE<br>PASSENGER/LIGHT TRUCK<br>WINTER                                                                         | STUDLESS<br>LIGHT TRUCK<br>WINTER                                                     |
| DRY HANDLING 3.5                                                                                                     | DRY HANDLING 4.5                                                                                  | DRY HANDLING 3.0                                                                                                     | DRY HANDLING 4.0                                                                      |
| WET HANDLING 3.5                                                                                                     | WET HANDLING 4.5                                                                                  | WET HANDLING 3.0                                                                                                     | WET HANDLING 4.0                                                                      |
| RIDE COMFORT 4.0                                                                                                     | RIDE COMFORT 4.0                                                                                  | RIDE COMFORT 3.0                                                                                                     | RIDE COMFORT 4.0                                                                      |
| QUIET RIDE 3.5                                                                                                       | QUIET RIDE 3.5                                                                                    | QUIET RIDE 3.0                                                                                                       | QUIET RIDE 3.5                                                                        |
| TREAD LIFE 3.5                                                                                                       | TREAD LIFE 4.5                                                                                    | TREAD LIFE 3.5                                                                                                       | TREAD LIFE 4.5                                                                        |
| SNOW TRACTION 4.5                                                                                                    | SNOW TRACTION 4.0                                                                                 | SNOW TRACTION 5.0                                                                                                    | SNOW TRACTION 4.5                                                                     |
| ICE TRACTION 5.0                                                                                                     | ICE TRACTION 4.0                                                                                  | ICE TRACTION 5.0                                                                                                     | ICE TRACTION 4.5                                                                      |
| <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Luxury Sedans<br>Passenger Cars<br>Light Trucks<br>Direct OE Replacement | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Sports Cars<br>Luxury Sedans<br>Direct OE Replacement | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Luxury Sedans<br>Passenger Cars<br>Light Trucks<br>Direct OE Replacement | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Light Trucks                              |
| <b>SPEED RATING</b><br>S-T-H                                                                                         | <b>SPEED RATING</b><br>H                                                                          | <b>SPEED RATING</b><br>Q-T-H                                                                                         | <b>SPEED RATING</b><br>Q                                                              |
| <b>WHEEL DIAMETER</b><br>13"-14"-15"-16"-17"-18"-19"-20"                                                             | <b>WHEEL DIAMETER</b><br>15"-16"-17"-18"-19"                                                      | <b>WHEEL DIAMETER</b><br>13"-14"-15"-16"-17"-18"-19"-20"-<br>21"-22"                                                 | <b>WHEEL DIAMETER</b><br>16"-17"-18"-20"                                              |
|                                   |                |                                 |  |

WINTER:

Celsius is the revolutionary variable-conditions tire with better ice and snow traction than a typical all-season tire, and longer tread life than a winter tire. Built for convenient year-round use, the Celsius CUV stops up to 37 feet shorter on snow than a typical all-season tire. Toyo Celsius means year-round versatility plus winter-weather safety in one.



| CELSIUS                                                                                                | CELSIUS CUV                                                                                            |
|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
|                     |                     |
| VARIABLE-CONDITIONS                                                                                    | VARIABLE-CONDITIONS                                                                                    |
| DRY HANDLING 3.0                                                                                       | DRY HANDLING 4.5                                                                                       |
| WET HANDLING 3.5                                                                                       | WET HANDLING 4.5                                                                                       |
| RIDE COMFORT 4.5                                                                                       | RIDE COMFORT 5.0                                                                                       |
| QUIET RIDE 3.5                                                                                         | QUIET RIDE 4.5                                                                                         |
| TREAD LIFE 4.0                                                                                         | TREAD LIFE 4.0                                                                                         |
| SNOW TRACTION 5.0                                                                                      | SNOW TRACTION 5.0                                                                                      |
| ICE TRACTION 5.0                                                                                       | ICE TRACTION 5.0                                                                                       |
| <b>UTQG</b><br>400 A B, 420 A B, 440 A B, 440 A A                                                      | <b>UTQG</b><br>H/V-Rated: 440 A A                                                                      |
| <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Luxury Sedans<br>Passenger Cars<br>Direct OE Replacement   | <b>VEHICLE &amp; APPLICATION SEGMENT</b><br>Crossovers<br>Luxury SUVs<br>Direct OE Replacement         |
| <b>SPEED RATING</b><br>H-S-T                                                                           | <b>SPEED RATING</b><br>H-V                                                                             |
| <b>WHEEL DIAMETER</b><br>14"-15"-16"-17"                                                               | <b>WHEEL DIAMETER</b><br>17"-18"-19"-20"                                                               |
| See pages 80-81.  | See pages 32-33.  |





## STUDLESS PASSENGER/CUV/SUV WINTER TIRE

The Observe GSi-5 provides excellent performance for demanding winter road conditions. Improved ice and snow capabilities, as well as long wear life, are the benefits of advanced design, technology, and compounding.

### POPULAR FITMENTS

Acura RDX  
Audi Q7  
Ford Edge  
Ford Fusion  
Lexus RX 350



Mountain Snowflake  
qualified for severe  
snow conditions.

### ADVANCED TREAD COMPOUND

- Enhances wet grip, braking, and traction in low temperatures.



# OBSERVE GSI-5

### ABSORBENT CARBONIC POWDER

- Offers better contact and increased safety as carbonic powder created from bamboo absorbs moisture on road.

### MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

### WIDE LATERAL GROOVES

- Evacuates slush for better road grip.

### CENTER RIB DESIGN

- Ensures straight-line stability.
- Increases ice traction in all directions.

### TREAD BLOCK TECHNOLOGY

- A Spider Sipe design provides snow and ice traction in all directions.
- Saw-toothed tread block edges improve snow traction and braking.





WINTER

W

| WHEEL DIA. | TIRE SIZE  | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE  | APPROVED RIM<br>WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|------------|------------|---------|----------|---------------|-----------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 13         | 155/80R13  | 79T        | SL      | BSW      | 130580        | 4.0-(4.5)-5.0                     | 14           | 11.3                | 22.7                | 6.3                  | 963            | 44                 | 916           |
|            | 175/70R13  | 82T        | SL      | BSW      | 130430        | 4.5-(5.0)-6.0                     | 16           | 12.0                | 22.7                | 7.2                  | 1047           | 44                 | 916           |
|            | 175/65R14  | 82T        | SL      | BSW      | 130020        | (5.0)-6.0                         | 17           | 12.0                | 23.0                | 7.0                  | 1047           | 44                 | 903           |
| 14         | 175/70R14  | 84T        | SL      | BSW      | 131010        | 4.5-(5.0)-6.0                     | 18           | 12.0                | 23.7                | 7.0                  | 1102           | 44                 | 876           |
|            | 185/60R14  | 82T        | SL      | BSW      | 130370        | 5.0-(5.5)-6.5                     | 17           | 12.0                | 22.8                | 7.5                  | 1047           | 44                 | 913           |
|            | 185/65R14  | 86T        | SL      | BSW      | 130100        | 5.0-(5.5)-6.5                     | 18           | 12.0                | 23.5                | 7.4                  | 1168           | 44                 | 885           |
|            | 185/70R14  | 88T        | SL      | BSW      | 130240        | 4.5-(5.5)-6.0                     | 19           | 12.0                | 24.3                | 7.4                  | 1235           | 44                 | 857           |
|            | 195/60R14  | 86T        | SL      | BSW      | 130860        | 5.5-(6.0)-7.0                     | 19           | 12.0                | 23.2                | 7.9                  | 1168           | 44                 | 894           |
|            | 195/70R14  | 91T        | SL      | BSW      | 130320        | 5.0-(6.0)-6.5                     | 21           | 12.0                | 24.8                | 7.9                  | 1356           | 44                 | 838           |
|            | P205/75R14 | 95T        | SL      | BSW      | 130850        | 5.0-(5.5)-7.0                     | 23           | 12.0                | 26.1                | 8.0                  | 1532           | 44                 | 795           |
| 15         | 145/65R15  | 74T        | SL      | BSW      | 131000        | 4.0-(4.5)-5.0                     | 14           | 11.0                | 22.5                | 5.9                  | 827            | 44                 | 923           |
|            | 145/65R15  | 72T        | SL      | BSW      | 130970        | 4.0-(4.5)-5.0                     | 14           | 11.0                | 22.5                | 5.9                  | 783            | 44                 | 923           |
|            | 175/55R15  | 77T        | SL      | BSW      | 130960        | 5.0-(5.5)-6.0                     | 16           | 11.3                | 22.6                | 7.1                  | 908            | 44                 | 921           |
|            | 175/65R15  | 84T        | SL      | BSW      | 130280        | (5.0)-6.0                         | 17           | 12.0                | 24.0                | 7.1                  | 1102           | 44                 | 865           |
|            | 185/55R15  | 82T        | SL      | BSW      | 130610        | 5.0-(6.0)-6.5                     | 17           | 12.0                | 23.0                | 7.6                  | 1047           | 44                 | 901           |
|            | 185/60R15  | 84T        | SL      | BSW      | 130190        | 5.0-(5.5)-6.5                     | 17           | 12.0                | 23.8                | 7.4                  | 1102           | 44                 | 874           |
|            | 185/65R15  | 88T        | SL      | BSW      | 130030        | 5.0-(5.5)-6.5                     | 18           | 12.0                | 24.5                | 7.6                  | 1235           | 44                 | 848           |
|            | 195/50R15  | 82T        | SL      | BSW      | 100780        | 5.5-(6.0)-7.0                     | 19           | 12.0                | 22.7                | 7.9                  | 1047           | 44                 | 914           |
|            | 195/55R15  | 85T        | SL      | BSW      | 100860        | 5.5-(6.0)-7.0                     | 20           | 12.0                | 23.4                | 7.9                  | 1135           | 44                 | 887           |
|            | 195/60R15  | 88T        | SL      | BSW      | 130210        | 5.5-(6.0)-7.0                     | 20           | 12.0                | 24.3                | 7.9                  | 1235           | 44                 | 854           |
|            | 195/65R15  | 91T        | SL      | BSW      | 130000        | 5.5-(6.0)-7.0                     | 20           | 12.0                | 25.0                | 8.0                  | 1356           | 44                 | 833           |
|            | 205/60R15  | 91T        | SL      | BSW      | 130440        | 5.5-(6.0)-7.5                     | 20           | 12.0                | 24.7                | 8.1                  | 1356           | 44                 | 841           |
|            | 205/65R15  | 94T        | SL      | BSW      | 130140        | 5.5-(6.0)-7.5                     | 21           | 12.0                | 25.5                | 8.0                  | 1477           | 44                 | 816           |
|            | P205/70R15 | 95T        | SL      | BSW      | 130120        | 5.0-(6.0)-7.0                     | 23           | 12.0                | 26.3                | 8.2                  | 1499           | 44                 | 791           |
|            | P205/75R15 | 97T        | SL      | BSW      | 130560        | 5.0-(5.5)-7.0                     | 24           | 12.0                | 27.1                | 7.9                  | 1598           | 44                 | 766           |
|            | 215/60R15  | 94T        | SL      | BSW      | 130820        | 6.0-(6.5)-7.5                     | 22           | 12.0                | 25.2                | 8.7                  | 1477           | 44                 | 825           |
|            | 215/65R15  | 96T        | SL      | BSW      | 130750        | 6.0-(6.5)-7.5                     | 23           | 12.0                | 26.0                | 8.7                  | 1565           | 44                 | 798           |
|            | 215/70R15  | 98T        | SL      | BSW      | 130010        | 5.5-(6.5)-7.0                     | 24           | 12.0                | 26.8                | 8.7                  | 1653           | 44                 | 775           |
|            | P215/75R15 | 100T       | SL      | BSW      | 130760        | 5.5-(6.0)-7.0                     | 26           | 12.0                | 27.6                | 8.3                  | 1742           | 44                 | 752           |
|            | 225/70R15  | 100T       | SL      | BSW      | 130880        | 6.0-(6.5)-7.5                     | 29           | 12.7                | 27.4                | 9.0                  | 1764           | 44                 | 759           |
|            | P225/75R15 | 102T       | SL      | BSW      | 130730        | (6.0)-7.5                         | 27           | 13.4                | 28.2                | 8.8                  | 1874           | 44                 | 735           |
| 225/80R15  | 105T       | SL         | BSW     | 132090   | (6.0)-7.5     | 31                                | 13.4         | 29.2                | 8.8                 | 2039                 | 44             | 712                |               |
| 235/75R15  | 105T       | SL         | BSW     | 130380   | 6.0-(6.5)-8.0 | 29                                | 13.4         | 28.8                | 9.3                 | 2039                 | 44             | 722                |               |
| 265/70R15  | 112T       | SL         | BSW     | 132220   | 7.0-(8.0)-9.0 | 38                                | 14.0         | 29.6                | 10.7                | 2469                 | 44             | 701                |               |
| 265/75R15  | 112T       | SL         | BSW     | 130670   | 7.0-(7.5)-9.0 | 38                                | 14.0         | 30.6                | 10.6                | 2469                 | 44             | 678                |               |
| 16         | 175/80R16  | 91T        | SL      | BSW      | 132070        | 4.5-(5.0)-6.0                     | 22           | 12.0                | 27.0                | 7.0                  | 1356           | 44                 | 769           |
|            | 185/55R16  | 83H        | SL      | BSW      | 130410        | 5.0-(6.0)-6.5                     | 18           | 12.0                | 24.1                | 7.6                  | 1074           | 51                 | 862           |
|            | P185/60R16 | 86T        | SL      | BSW      | 132290        | 5.0-(5.5)-6.5                     | 19           | 12.0                | 24.7                | 7.4                  | 1168           | 44                 | 840           |
|            | 195/50R16  | 84T        | SL      | BSW      | 130620        | 5.5-(6.0)-7.0                     | 19           | 12.0                | 23.8                | 7.8                  | 1102           | 44                 | 874           |
|            | 195/55R16  | 87T        | SL      | BSW      | 130570        | 5.5-(6.0)-7.0                     | 19           | 12.0                | 24.5                | 7.8                  | 1201           | 44                 | 848           |
|            | 205/55R16  | 94T        | XL      | BSW      | 130160        | 5.5-(6.5)-7.5                     | 21           | 12.0                | 24.9                | 8.4                  | 1477           | 50                 | 835           |
|            | 205/60R16  | 92T        | SL      | BSW      | 130130        | 5.5-(6.0)-7.5                     | 22           | 12.0                | 25.7                | 8.1                  | 1389           | 44                 | 809           |
|            | 205/65R16  | 95T        | SL      | BSW      | 130310        | 5.5-(6.0)-7.5                     | 23           | 12.0                | 26.5                | 8.2                  | 1521           | 44                 | 785           |
|            | P205/70R16 | 96S        | SL      | BSW      | 130740        | 5.0-(6.0)-7.0                     | 24           | 12.0                | 27.3                | 8.1                  | 1565           | 44                 | 761           |
|            | 215/55R16  | 93T        | SL      | BSW      | 100810        | 6.0-(7.0)-7.5                     | 24           | 12.0                | 25.3                | 8.9                  | 1433           | 44                 | 822           |
|            | 215/55R16  | 97T        | XL      | BSW      | 131400        | 6.0-(7.0)-7.5                     | 24           | 12.0                | 25.3                | 8.9                  | 1609           | 50                 | 822           |
|            | 215/60R16  | 95T        | SL      | BSW      | 130180        | 6.0-(6.5)-7.5                     | 24           | 12.0                | 26.2                | 8.7                  | 1521           | 44                 | 793           |
|            | 215/65R16  | 98T        | SL      | BSW      | 130040        | 6.0-(6.5)-7.5                     | 25           | 12.0                | 27.0                | 8.7                  | 1653           | 44                 | 769           |
|            | 215/70R16  | 100S       | SL      | BSW      | 130090        | 5.5-(6.5)-7.0                     | 27           | 12.0                | 27.8                | 8.6                  | 1764           | 44                 | 746           |
|            | 215/75R16  | 103S       | SL      | BSW      | 130920        | 5.5-(6.0)-7.0                     | 27           | 13.4                | 28.7                | 8.2                  | 1929           | 44                 | 724           |
|            | 225/60R16  | 98T        | SL      | BSW      | 130200        | 6.0-(6.5)-8.0                     | 26           | 12.7                | 26.6                | 8.9                  | 1653           | 44                 | 781           |
|            | 225/65R16  | 100T       | SL      | BSW      | 130250        | 6.0-(6.5)-8.0                     | 28           | 12.0                | 27.5                | 9.0                  | 1764           | 44                 | 756           |
|            | 225/70R16  | 103S       | SL      | BSW      | 130170        | 6.0-(6.5)-7.5                     | 28           | 12.7                | 28.4                | 8.9                  | 2094           | 44                 | 731           |
|            | 225/75R16  | 104S       | SL      | BSW      | 130530        | (6.0)-7.5                         | 29           | 13.4                | 29.2                | 8.8                  | 1984           | 44                 | 711           |
|            | 235/60R16  | 100S       | SL      | BSW      | 130500        | 6.5-(7.0)-8.5                     | 27           | 13.4                | 27.1                | 9.5                  | 1764           | 44                 | 767           |
|            | 235/65R16  | 103T       | SL      | BSW      | 130050        | 6.5-(7.0)-8.5                     | 28           | 13.4                | 28.0                | 9.5                  | 1929           | 44                 | 742           |
|            | 235/70R16  | 106S       | SL      | BSW      | 130070        | 6.0-(7.0)-8.0                     | 30           | 13.4                | 29.0                | 9.5                  | 2094           | 44                 | 716           |
|            | 235/75R16  | 108S       | SL      | BSW      | 130900        | 6.0-(6.5)-8.0                     | 32           | 13.4                | 29.8                | 9.3                  | 2205           | 44                 | 697           |
|            | 245/70R16  | 107S       | SL      | BSW      | 130520        | 6.5-(7.0)-8.0                     | 31           | 13.4                | 29.5                | 9.8                  | 2149           | 44                 | 704           |
|            | 245/75R16  | 111S       | SL      | BSW      | 130450        | 6.5-(7.0)-8.0                     | 34           | 13.4                | 30.5                | 9.8                  | 2403           | 44                 | 682           |
| 255/70R16  | 111S       | SL         | BSW     | 130890   | 6.5-(7.5)-8.5 | 36                                | 13.4         | 30.1                | 10.3                | 2403                 | 44             | 691                |               |



STUDLESS PERFORMANCE WINTER TIRE

When the conditions turn to snow and ice, the Observe Garit KX is the tire for your sports car. This unidirectional winter performance tire has an H-speed rating and is designed for traction in harsh winter conditions.

POPULAR FITMENTS

Acura TSX  
Audi A4  
Honda Accord  
Toyota Camry  
Volkswagen Jetta



Mountain Snowflake  
qualified for severe  
snow conditions.

ADVANCED TREAD COMPOUND

- Enhances wet grip, braking, and traction in low temperatures.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

SAW-TOOTHED BLOCKS

- Improves snow traction and braking.

HIGH-DENSITY WAVY SIPES

- Increase snow traction with more biting edges.



| WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 15         | 195/55R15 | 85H        | SL      | BSW      | 149760       | 5.5-( <b>6.0</b> )-7.0         | 19           | 11.6                | 23.3                | 7.9                  | 1135           | 51                 | 890           |
|            | 195/50R16 | 84H        | SL      | BSW      | 149750       | 5.5-( <b>6.0</b> )-7.0         | 20           | 11.6                | 23.7                | 7.9                  | 1102           | 51                 | 878           |
|            | 195/55R16 | 87H        | SL      | BSW      | 149770       | 5.5-( <b>6.0</b> )-7.0         | 20           | 11.6                | 24.4                | 8.0                  | 1201           | 51                 | 852           |
| 16         | 205/50R16 | 87H        | SL      | BSW      | 149720       | 5.5-( <b>6.5</b> )-7.5         | 21           | 12.2                | 24.1                | 8.4                  | 1201           | 51                 | 862           |
|            | 205/55R16 | 94H        | XL      | BSW      | 149780       | 5.5-( <b>6.5</b> )-7.5         | 22           | 12.2                | 24.9                | 8.5                  | 1477           | 50                 | 835           |
|            | 205/55R16 | 94Q        | XL      | BSW      | 176300       | 5.5-( <b>6.5</b> )-7.5         | 22           | 12.2                | 25.0                | 8.4                  | 1522           | 50                 | 832           |
|            | 215/55R16 | 97H        | XL      | BSW      | 149790       | 6.0-( <b>7.0</b> )-7.5         | 24           | 12.2                | 25.3                | 8.9                  | 1609           | 50                 | 822           |
|            | 225/50R16 | 92H        | SL      | BSW      | 149740       | 6.0-( <b>7.0</b> )-8.0         | 24           | 12.2                | 25.0                | 9.1                  | 1389           | 51                 | 830           |
|            | 225/55R16 | 99H        | XL      | BSW      | 149800       | 6.0-( <b>7.0</b> )-8.0         | 26           | 12.2                | 25.8                | 9.3                  | 1709           | 50                 | 806           |
|            | 205/50R17 | 93H        | XL      | BSW      | 149670       | 5.5-( <b>6.5</b> )-7.5         | 22           | 12.2                | 25.2                | 8.3                  | 1433           | 50                 | 825           |
| 17         | 215/45R17 | 91H        | XL      | BSW      | 149600       | ( <b>7.0</b> )-8.0             | 23           | 12.2                | 24.7                | 8.5                  | 1356           | 50                 | 840           |
|            | 215/50R17 | 95H        | XL      | BSW      | 149840       | 6.0-( <b>7.0</b> )-7.5         | 24           | 11.6                | 25.5                | 8.6                  | 1521           | 50                 | 814           |
|            | 215/55R17 | 94H        | SL      | BSW      | 149710       | 6.0-( <b>7.0</b> )-7.5         | 26           | 12.2                | 26.4                | 9.0                  | 1477           | 51                 | 786           |
|            | 225/45R17 | 94H        | XL      | BSW      | 149610       | 7.0-( <b>7.5</b> )-8.5         | 25           | 12.2                | 25.0                | 9.1                  | 1477           | 50                 | 831           |
|            | 225/50R17 | 94H        | SL      | BSW      | 149690       | 6.0-( <b>7.0</b> )-8.0         | 25           | 12.2                | 25.9                | 8.9                  | 1477           | 51                 | 802           |
|            | 225/55R17 | 97H        | SL      | BSW      | 149660       | 6.0-( <b>7.0</b> )-8.0         | 28           | 12.2                | 26.8                | 9.2                  | 1609           | 51                 | 776           |
|            | 235/45R17 | 97H        | XL      | BSW      | 149620       | 7.5-( <b>8.0</b> )-9.0         | 26           | 12.2                | 25.4                | 9.5                  | 1609           | 50                 | 819           |
|            | 235/50R17 | 96H        | SL      | BSW      | 149700       | 6.5-( <b>7.5</b> )-8.5         | 27           | 12.2                | 26.3                | 9.5                  | 1565           | 51                 | 791           |
|            | 245/45R17 | 99H        | XL      | BSW      | 149810       | 7.5-( <b>8.0</b> )-9.0         | 27           | 12.2                | 25.7                | 9.7                  | 1709           | 50                 | 807           |
|            | 225/45R18 | 91H        | SL      | BSW      | 149630       | 7.0-( <b>7.5</b> )-8.5         | 25           | 12.2                | 26.1                | 8.9                  | 1356           | 51                 | 797           |
| 18         | 225/50R18 | 95H        | SL      | BSW      | 149830       | 6.0-( <b>7.0</b> )-8.0         | 27           | 12.2                | 26.9                | 9.0                  | 1521           | 51                 | 771           |
|            | 235/45R18 | 98H        | XL      | BSW      | 149640       | 7.5-( <b>8.0</b> )-9.0         | 27           | 12.2                | 26.5                | 9.4                  | 1653           | 50                 | 785           |
|            | 245/45R18 | 96H        | SL      | BSW      | 149650       | 7.5-( <b>8.0</b> )-9.0         | 26           | 12.2                | 26.8                | 9.6                  | 1565           | 51                 | 776           |
| 19         | 245/40R19 | 94H        | SL      | BSW      | 149820       | 8.0-( <b>8.5</b> )-9.5         | 27           | 12.2                | 26.7                | 9.7                  | 1477           | 51                 | 778           |

Speed rated "Q" = 99mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall. Bold designates measuring rim width. \*Inflated dimensions.



STUDDABLE PASSENGER/LIGHT TRUCK WINTER TIRE

Designed for tough winter conditions, the Observe G3-Ice combines excellent performance with driving comfort. For areas that experience severe winters, this tire can be studded for added traction on ice and compacted snow. Optimized stud hole placement delivers better traction and a quieter ride with fewer studs.

POPULAR FITMENTS

Chevrolet Silverado  
Ford Fusion  
Honda Accord  
Subaru Outback  
Toyota 4Runner  
Volkswagen Passat



Mountain Snowflake  
qualified for severe  
snow conditions.

MICROBIT TECHNOLOGY

- Improves traction as ground walnut shells dig and bite into the snow and ice.

HIGH-SILICA WINTER COMPOUND

- Ensures tread blocks remain flexible in lower temperatures.
- Enhances wet braking and handling even in lower temperatures.

OPTIMIZED STUD HOLE PLACEMENT

- Improves road contact and traction with fewer studs.
- Reduces noise, resulting in a quieter ride.
- Able to accept TSMI #11 studs to aid in ice traction.

LARGE U-SHAPED TREAD BLOCKS WITH SAW-TOOTH EDGE

- Grab onto the snow for better traction and braking.

GEAR EDGE DESIGN AT STUD HOLE

- Provides better traction during cornering and braking.



| WHEEL DIA. | TIRE SIZE   | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 13         | 175/70R13   | 82T        | SL      | BSW      | 138020       | 4.5-(5.0)-6.0                  | 17           | 11.3                | 22.7                | 7.0                  | 1047           | 44                 | 916           |
|            | 175/65R14   | 82T        | SL      | BSW      | 138050       | (5.0)-6.0                      | 17           | 11.3                | 23.0                | 7.0                  | 1047           | 44                 | 903           |
|            | 175/70R14   | 84T        | SL      | BSW      | 138030       | 4.5-(5.0)-6.0                  | 18           | 11.3                | 23.7                | 7.0                  | 1102           | 44                 | 876           |
| 14         | 175/70R14   | 84T        | SL      | BSW      | 131270       | 4.5-(5.0)-6.0                  | 18           | 11.3                | 23.7                | 7.0                  | 1102           | 44                 | 876           |
|            | 185/60R14   | 82T        | SL      | BSW      | 131260       | 5.0-(5.5)-6.5                  | 18           | 11.3                | 22.8                | 7.4                  | 1047           | 44                 | 913           |
|            | 185/60R14   | 82T        | SL      | BSW      | 138080       | 5.0-(5.5)-6.5                  | 18           | 11.3                | 22.8                | 7.4                  | 1047           | 44                 | 913           |
|            | 185/65R14   | 86T        | SL      | BSW      | 138060       | 5.0-(5.5)-6.5                  | 18           | 11.3                | 23.5                | 7.4                  | 1168           | 44                 | 885           |
|            | 185/70R14   | 88T        | SL      | BSW      | 138040       | 4.5-(5.5)-6.0                  | 20           | 11.3                | 24.3                | 7.4                  | 1235           | 44                 | 857           |
|            | 175/65R15   | 84T        | SL      | BSW      | 139130       | (5.0)-6.0                      | 18           | 11.3                | 24.0                | 7.0                  | 1102           | 44                 | 866           |
| 15         | 185/55R15   | 82T        | SL      | BSW      | 138200       | 5.0-(6.0)-6.5                  | 18           | 11.3                | 23.0                | 7.6                  | 1047           | 44                 | 902           |
|            | 185/60R15   | 84T        | SL      | BSW      | 131280       | 5.0-(5.5)-6.5                  | 19           | 11.3                | 23.7                | 7.4                  | 1102           | 44                 | 875           |
|            | 185/60R15   | 84T        | SL      | BSW      | 138170       | 5.0-(5.5)-6.5                  | 19           | 11.3                | 23.7                | 7.4                  | 1102           | 44                 | 875           |
|            | 185/65R15   | 88T        | SL      | BSW      | 138070       | 5.0-(5.5)-6.5                  | 20           | 11.3                | 24.4                | 7.4                  | 1235           | 44                 | 850           |
|            | 195/50R15   | 82T        | SL      | BSW      | 138250       | 5.5-(6.0)-7.0                  | 19           | 11.3                | 22.7                | 7.9                  | 1047           | 44                 | 914           |
|            | 195/55R15   | 85T        | SL      | BSW      | 138210       | 5.5-(6.0)-7.0                  | 20           | 11.3                | 23.4                | 7.9                  | 1135           | 44                 | 887           |
|            | 195/60R15   | 88T        | SL      | BSW      | 138090       | 5.5-(6.0)-7.0                  | 20           | 11.3                | 24.2                | 7.9                  | 1235           | 44                 | 858           |
|            | 195/60R15   | 88T        | SL      | BSW      | 131250       | 5.5-(6.0)-7.0                  | 20           | 11.3                | 24.2                | 7.9                  | 1235           | 44                 | 858           |
|            | 195/65R15   | 91T        | SL      | BSW      | 138010       | 5.5-(6.0)-7.0                  | 21           | 11.3                | 25.0                | 7.9                  | 1356           | 44                 | 831           |
|            | 205/65R15   | 94T        | SL      | BSW      | 138160       | 5.5-(6.0)-7.5                  | 23           | 11.3                | 25.5                | 8.2                  | 1477           | 44                 | 816           |
|            | 205/70R15   | 100T       | XL      | BSW      | 138000       | 5.0-(6.0)-7.0                  | 27           | 12.5                | 26.3                | 8.2                  | 1764           | 50                 | 789           |
|            | 215/70R15   | 98T        | SL      | BSW      | 110310       | 5.5-(6.5)-7.0                  | 27           | 12.5                | 26.9                | 8.7                  | 1653           | 44                 | 773           |
|            | 265/70R15   | 112T       | SL      | BSW      | 110350       | 7.0-(8.0)-9.0                  | 39           | 13.7                | 29.6                | 10.7                 | 2469           | 44                 | 701           |
|            | 185/50R16   | 81T        | SL      | BSW      | 138260       | 5.0-(6.0)-6.5                  | 19           | 11.3                | 23.3                | 7.6                  | 1019           | 44                 | 891           |
|            | 185/55R16   | 87T        | XL      | BSW      | 138220       | 5.0-(6.0)-6.5                  | 20           | 11.3                | 24.0                | 7.6                  | 1201           | 50                 | 865           |
| 16         | 195/45R16   | 84T        | XL      | BSW      | 138280       | 6.0-(6.5)-7.5                  | 19           | 11.3                | 22.9                | 7.7                  | 1102           | 50                 | 907           |
|            | 195/55R16   | 87T        | SL      | BSW      | 139140       | 5.5-(6.0)-7.0                  | 21           | 11.3                | 24.4                | 7.9                  | 1201           | 44                 | 851           |
|            | 205/55R16   | 91T        | SL      | BSW      | 138110       | 5.5-(6.5)-7.5                  | 23           | 11.3                | 24.9                | 8.4                  | 1356           | 44                 | 835           |
|            | 205/60R16   | 92T        | SL      | BSW      | 138100       | 5.5-(6.0)-7.5                  | 23           | 11.3                | 25.7                | 8.2                  | 1389           | 44                 | 809           |
|            | 215/55R16   | 93T        | SL      | BSW      | 138230       | 6.0-(7.0)-7.5                  | 25           | 11.3                | 25.3                | 8.9                  | 1433           | 44                 | 822           |
|            | 215/60R16   | 95T        | SL      | BSW      | 138180       | 6.0-(6.5)-7.5                  | 25           | 11.3                | 26.1                | 8.7                  | 1521           | 44                 | 795           |
|            | 215/65R16   | 98T        | SL      | BSW      | 139010       | 6.0-(6.5)-7.5                  | 27           | 12.5                | 27.0                | 8.7                  | 1653           | 44                 | 769           |
|            | 215/70R16   | 100T       | SL      | BSW      | 138370       | 5.5-(6.5)-7.0                  | 28           | 12.0                | 27.9                | 8.7                  | 1764           | 44                 | 745           |
|            | 225/55R16   | 95T        | SL      | BSW      | 139150       | 6.0-(7.0)-8.0                  | 25           | 11.3                | 25.7                | 9.2                  | 1521           | 44                 | 807           |
|            | 225/70R16   | 107T       | XL      | BSW      | 139000       | 6.0-(6.5)-7.5                  | 32           | 12.5                | 28.4                | 9.0                  | 2149           | 50                 | 731           |
|            | 225/75R16   | 104H       | SL      | BSW      | 110400       | (6.0)-7.5                      | 32           | 12.5                | 29.3                | 8.8                  | 1984           | 51                 | 709           |
|            | 235/70R16   | 106T       | SL      | BSW      | 139330       | 6.0-(7.0)-8.0                  | 33           | 13.1                | 29.0                | 9.4                  | 2094           | 44                 | 717           |
|            | 235/75R16   | 108T       | SL      | BSW      | 110410       | 6.0-(6.5)-8.0                  | 34           | 13.1                | 29.8                | 9.3                  | 2205           | 44                 | 696           |
|            | 245/70R16   | 111T       | XL      | BSW      | 138380       | 6.5-(7.0)-8.0                  | 36           | 13.1                | 29.5                | 9.8                  | 2403           | 50                 | 704           |
|            | LT245/75R16 | 120/116Q   | E       | BSW      | 138480       | 6.0-(7.0)-8.0                  | 44           | 15.0                | 30.5                | 9.8                  | 3042           | 80                 | 682           |
|            | 255/65R16   | 109T       | SL      | BSW      | 110290       | 7.0-(7.5)-9.0                  | 36           | 13.1                | 29.1                | 10.2                 | 2271           | 44                 | 715           |
|            | 255/70R16   | 111T       | SL      | BSW      | 110390       | 6.5-(7.5)-8.5                  | 38           | 13.1                | 30.1                | 10.2                 | 2403           | 44                 | 691           |
|            | 265/70R16   | 112T       | SL      | BSW      | 138530       | 7.0-(8.0)-9.0                  | 41           | 13.7                | 30.6                | 10.7                 | 2469           | 44                 | 678           |
|            | 275/70R16   | 114T       | SL      | BSW      | 110380       | 7.0-(8.0)-9.0                  | 43           | 13.7                | 31.2                | 11.0                 | 2601           | 44                 | 666           |

Speed rated "T" = 118mph, "H" = 130mph, "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall.  
Bold designates measuring rim width. Observe G3-Ice shown with winter studs. Pinned to accept TSMI #11 stud. \*Inflated dimensions.



|    | WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 17 |            | 205/50R17 | 89T        | SL      | BSW      | 138270       | 5.5- <b>(6.5)</b> -7.5         | 23           | 11.3                | 25.1                | 8.4                  | 1279           | 44                 | 827           |
|    |            | 215/40R17 | 87T        | XL      | BSW      | 139250       | 7.0- <b>(7.5)</b> -8.5         | 21           | 11.3                | 23.8                | 8.6                  | 1201           | 50                 | 874           |
|    |            | 215/45R17 | 87T        | SL      | BSW      | 139190       | <b>(7.0)</b> -8.0              | 22           | 11.3                | 24.6                | 8.4                  | 1201           | 44                 | 843           |
|    |            | 215/50R17 | 91T        | SL      | BSW      | 138130       | 6.0- <b>(7.0)</b> -7.5         | 25           | 11.3                | 25.5                | 8.9                  | 1356           | 44                 | 814           |
|    |            | 215/55R17 | 98T        | XL      | BSW      | 138120       | 6.0- <b>(7.0)</b> -7.5         | 26           | 11.3                | 26.3                | 8.9                  | 1653           | 50                 | 790           |
|    |            | 215/60R17 | 100T       | XL      | BSW      | 139030       | 6.0- <b>(6.5)</b> -7.5         | 28           | 12.5                | 27.2                | 8.7                  | 1764           | 50                 | 765           |
|    |            | 225/45R17 | 91T        | SL      | BSW      | 139200       | 7.0- <b>(7.5)</b> -8.5         | 24           | 11.3                | 25.0                | 8.9                  | 1356           | 44                 | 832           |
|    |            | 225/50R17 | 94T        | SL      | BSW      | 138140       | 6.0- <b>(7.0)</b> -8.0         | 26           | 11.3                | 25.9                | 9.2                  | 1477           | 44                 | 802           |
|    |            | 225/55R17 | 101T       | XL      | BSW      | 138240       | 6.0- <b>(7.0)</b> -8.0         | 28           | 11.3                | 26.8                | 9.2                  | 1819           | 50                 | 776           |
|    |            | 225/60R17 | 103T       | XL      | BSW      | 139050       | 6.0- <b>(6.5)</b> -8.0         | 30           | 12.5                | 27.6                | 9.0                  | 1929           | 50                 | 752           |
|    |            | 225/65R17 | 106T       | XL      | BSW      | 139320       | 6.0- <b>(6.5)</b> -8.0         | 31           | 11.3                | 28.5                | 9.0                  | 2094           | 50                 | 729           |
|    |            | 235/45R17 | 94T        | SL      | BSW      | 138150       | 7.5- <b>(8.0)</b> -9.0         | 26           | 11.3                | 25.4                | 9.3                  | 1477           | 44                 | 819           |
|    |            | 235/55R17 | 103T       | XL      | BSW      | 110160       | 6.5- <b>(7.5)</b> -8.5         | 30           | 12.0                | 27.2                | 9.6                  | 1929           | 50                 | 765           |
|    |            | 235/60R17 | 106T       | XL      | BSW      | 139360       | 6.5- <b>(7.0)</b> -8.5         | 33           | 13.1                | 28.1                | 9.4                  | 2094           | 50                 | 739           |
|    |            | 235/65R17 | 108T       | XL      | BSW      | 139020       | 6.5- <b>(7.0)</b> -8.5         | 34           | 13.1                | 29.1                | 9.4                  | 2205           | 50                 | 715           |
|    |            | 245/40R17 | 95T        | XL      | BSW      | 139260       | 8.0- <b>(8.5)</b> -9.5         | 25           | 11.3                | 24.7                | 9.8                  | 1521           | 50                 | 840           |
|    |            | 245/45R17 | 99T        | XL      | BSW      | 138290       | 7.5- <b>(8.0)</b> -9.0         | 25           | 11.3                | 25.7                | 9.6                  | 1709           | 50                 | 809           |
|    |            | 245/65R17 | 107T       | SL      | BSW      | 139350       | <b>(7.0)</b> -8.5              | 34           | 13.1                | 29.5                | 9.8                  | 2149           | 44                 | 704           |
|    |            | 245/70R17 | 110T       | SL      | BSW      | 110370       | 6.5- <b>(7.0)</b> -8.0         | 37           | 13.1                | 30.6                | 9.8                  | 2337           | 44                 | 680           |
|    |            | 255/65R17 | 114T       | XL      | BSW      | 138390       | 7.0- <b>(7.5)</b> -9.0         | 37           | 13.1                | 30.1                | 10.2                 | 2601           | 50                 | 691           |
| 18 |            | 265/65R17 | 116T       | XL      | BSW      | 138400       | 7.5- <b>(8.0)</b> -9.5         | 42           | 13.7                | 30.6                | 10.7                 | 2756           | 50                 | 680           |
|    |            | 275/65R17 | 119T       | XL      | BSW      | 110320       | 7.5- <b>(8.0)</b> -9.5         | 44           | 13.7                | 31.1                | 11.0                 | 2998           | 50                 | 668           |
|    |            | 225/40R18 | 92T        | XL      | BSW      | 138330       | 7.5- <b>(8.0)</b> -9.0         | 25           | 11.3                | 25.1                | 9.1                  | 1389           | 50                 | 828           |
|    |            | 225/45R18 | 95T        | XL      | BSW      | 139210       | 7.0- <b>(7.5)</b> -8.5         | 25           | 11.3                | 25.9                | 8.9                  | 1521           | 50                 | 801           |
|    |            | 225/55R18 | 102T       | XL      | BSW      | 138420       | 6.0- <b>(7.0)</b> -8.0         | 29           | 12.0                | 27.8                | 9.2                  | 1874           | 50                 | 748           |
|    |            | 225/60R18 | 100T       | SL      | BSW      | 139060       | 6.0- <b>(6.5)</b> -8.0         | 30           | 11.3                | 28.6                | 9.0                  | 1764           | 44                 | 726           |
|    |            | 225/60R18 | 104T       | XL      | BSW      | 138190       | 6.0- <b>(6.5)</b> -8.0         | 30           | 11.3                | 28.6                | 9.0                  | 1984           | 50                 | 726           |
|    |            | 235/40R18 | 95T        | XL      | BSW      | 138340       | 8.0- <b>(8.5)</b> -9.5         | 25           | 11.3                | 25.4                | 9.5                  | 1521           | 50                 | 818           |
|    |            | 235/45R18 | 98T        | XL      | BSW      | 138300       | 7.5- <b>(8.0)</b> -9.0         | 27           | 11.3                | 26.3                | 9.3                  | 1653           | 50                 | 789           |
|    |            | 235/50R18 | 101T       | XL      | BSW      | 110180       | 6.5- <b>(7.5)</b> -8.5         | 30           | 12.0                | 27.3                | 9.6                  | 1819           | 50                 | 761           |
|    |            | 235/55R18 | 104T       | XL      | BSW      | 138490       | 6.5- <b>(7.5)</b> -8.5         | 32           | 12.0                | 28.1                | 9.6                  | 1984           | 50                 | 738           |
|    |            | 235/60R18 | 107T       | XL      | BSW      | 139070       | 6.5- <b>(7.0)</b> -8.5         | 34           | 13.1                | 29.1                | 9.4                  | 2149           | 50                 | 714           |
|    |            | 235/65R18 | 110T       | XL      | BSW      | 110210       | 6.5- <b>(7.0)</b> -8.5         | 35           | 13.1                | 30.0                | 9.4                  | 2337           | 50                 | 692           |
|    |            | 245/40R18 | 97T        | XL      | BSW      | 138350       | 8.0- <b>(8.5)</b> -9.5         | 26           | 11.3                | 25.7                | 9.8                  | 1609           | 50                 | 808           |
|    |            | 245/45R18 | 100T       | XL      | BSW      | 138310       | 7.5- <b>(8.0)</b> -9.0         | 29           | 11.3                | 26.7                | 9.6                  | 1764           | 50                 | 779           |
|    |            | 245/50R18 | 100T       | SL      | BSW      | 139180       | 7.0- <b>(7.5)</b> -8.5         | 31           | 11.3                | 27.7                | 10.0                 | 1764           | 44                 | 751           |
|    |            | 245/60R18 | 105T       | SL      | BSW      | 110220       | <b>(7.0)</b> -8.5              | 34           | 13.1                | 29.6                | 9.8                  | 2039           | 44                 | 703           |
|    |            | 255/45R18 | 103T       | XL      | BSW      | 139220       | 8.0- <b>(8.5)</b> -9.5         | 30           | 11.3                | 27.0                | 10.0                 | 1929           | 50                 | 768           |
|    |            | 255/55R18 | 109T       | XL      | BSW      | 139090       | 7.0- <b>(8.0)</b> -9.0         | 34           | 12.0                | 29.0                | 10.4                 | 2271           | 50                 | 716           |
|    |            | 255/60R18 | 112T       | XL      | BSW      | 110140       | 7.0- <b>(7.5)</b> -9.0         | 38           | 13.1                | 30.0                | 10.2                 | 2469           | 50                 | 692           |
| 19 |            | 265/60R18 | 114T       | XL      | BSW      | 138410       | 7.5- <b>(8.0)</b> -9.5         | 42           | 13.7                | 30.5                | 10.7                 | 2601           | 50                 | 681           |
|    |            | 275/60R18 | 117T       | XL      | BSW      | 110360       | 7.5- <b>(8.0)</b> -9.5         | 44           | 13.7                | 31.0                | 11.0                 | 2833           | 50                 | 670           |
|    |            | 285/60R18 | 120T       | XL      | BSW      | 139080       | 8.0- <b>(8.5)</b> -10.0        | 47           | 13.7                | 31.5                | 11.5                 | 3086           | 50                 | 660           |
|    |            |           |            |         |          |              |                                |              |                     |                     |                      |                |                    |               |

|    | WHEEL DIA. | TIRE SIZE | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE |
|----|------------|-----------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|
| 19 |            | 235/50R19 | 103T       | XL      | BSW      | 138500       | 6.5- <b>(7.5)</b> -8.5         | 31           | 12.0                | 28.3                | 9.6                  | 1929           | 50                 | 734           |
|    |            | 235/55R19 | 105H       | XL      | BSW      | 138430       | 6.5- <b>(7.5)</b> -8.5         | 32           | 12.0                | 29.2                | 9.6                  | 2039           | 50                 | 712           |
|    |            | 245/45R19 | 102T       | XL      | BSW      | 138320       | 7.5- <b>(8.0)</b> -9.0         | 30           | 11.3                | 27.7                | 9.6                  | 1874           | 50                 | 751           |
|    |            | 245/55R19 | 103T       | SL      | BSW      | 110300       | 7.0- <b>(7.5)</b> -8.5         | 34           | 12.0                | 29.6                | 10.0                 | 1929           | 44                 | 701           |
|    |            | 255/40R19 | 100T       | XL      | BSW      | 139270       | 8.5- <b>(9.0)</b> -10.0        | 30           | 11.3                | 27.0                | 10.2                 | 1764           | 50                 | 768           |
|    |            | 255/45R19 | 104T       | XL      | BSW      | 139230       | 8.0- <b>(8.5)</b> -9.5         | 32           | 11.3                | 28.1                | 10.0                 | 1984           | 50                 | 740           |
|    |            | 255/50R19 | 107T       | XL      | BSW      | 138510       | 7.0- <b>(8.0)</b> -9.0         | 35           | 12.0                | 29.1                | 10.4                 | 2149           | 50                 | 714           |
|    |            | 255/55R19 | 111T       | XL      | BSW      | 110340       | 7.0- <b>(8.0)</b> -9.0         | 36           | 12.0                | 30.0                | 10.4                 | 2403           | 50                 | 692           |
|    |            | 265/50R19 | 110T       | XL      | BSW      | 110190       | 7.5- <b>(8.5)</b> -9.5         | 37           | 12.0                | 29.5                | 10.9                 | 2337           | 50                 | 704           |
|    |            | 275/40R19 | 105T       | XL      | BSW      | 139280       | 9.0- <b>(9.5)</b> -11.0        | 33           | 11.3                | 27.7                | 10.9                 | 2039           | 50                 | 751           |
|    |            | 275/55R19 | 111T       | SL      | BSW      | 110330       | 7.5- <b>(8.5)</b> -9.5         | 40           | 12.0                | 30.9                | 11.2                 | 2403           | 44                 | 672           |
|    |            | 285/40R19 | 103T       | SL      | BSW      | 138360       | 9.5- <b>(10.0)</b> -11.0       | 34           | 11.3                | 28.0                | 11.4                 | 1929           | 44                 | 742           |
|    |            | 285/45R19 | 111T       | XL      | BSW      | 131190       | 9.0- <b>(9.5)</b> -10.5        | 35           | 12.0                | 29.1                | 11.2                 | 2403           | 50                 | 714           |
|    |            |           |            |         |          |              |                                |              |                     |                     |                      |                |                    |               |
| 20 |            | 235/45R20 | 100T       | XL      | BSW      | 138460       | 7.5- <b>(8.0)</b> -9.0         | 30           | 12.0                | 28.3                | 9.3                  | 1764           | 50                 | 733           |
|    |            | 235/55R20 | 105T       | XL      | BSW      | 139170       | 6.5- <b>(7.5)</b> -8.5         | 34           | 11.3                | 30.2                | 9.6                  | 2039           | 50                 | 689           |
|    |            | 245/40R20 | 99T        | XL      | BSW      | 138470       | 8.0- <b>(8.5)</b> -9.5         | 32           | 12.0                | 27.7                | 9.8                  | 1709           | 50                 | 749           |
|    |            | 245/45R20 | 99T        | SL      | BSW      | 110130       | 7.5- <b>(8.0)</b> -9.0         | 31           | 12.0                | 28.7                | 9.6                  | 1709           | 44                 | 725           |
|    |            | 255/35R20 | 97T        | XL      | BSW      | 139300       | 8.5- <b>(9.0)</b> -10.0        | 28           | 11.3                | 27.0                | 10.2                 | 1609           | 50                 | 769           |
|    |            | 255/45R20 | 105T       | XL      | BSW      | 131160       | 8.0- <b>(8.5)</b> -9.5         | 34           | 12.0                | 29.1                | 10.0                 | 2039           | 50                 | 715           |
|    |            | 255/50R20 | 109T       | XL      | BSW      | 110230       | 7.0- <b>(8.0)</b> -9.0         | 37           | 12.0                | 30.1                | 10.4                 | 2271           | 50                 | 691           |
|    |            | 255/55R20 | 110T       | XL      | BSW      | 110120       | 7.0- <b>(8.0)</b> -9.0         | 38           | 12.0                | 31.0                | 10.4                 | 2337           | 50                 | 670           |
|    |            | 265/40R20 | 104T       | XL      | BSW      | 139290       | 9.0- <b>(9.5)</b> -10.5        | 33           | 11.3                | 28.3                | 10.7                 | 1984           | 50                 | 733           |
|    |            | 265/50R20 | 111T       | XL      | BSW      | 110240       | 7.5- <b>(8.5)</b> -9.5         | 39           | 12.0                | 30.5                | 10.9                 | 2403           | 50                 | 682           |
|    |            | 275/35R20 | 102T       | XL      | BSW      | 139310       | 9.0- <b>(9.5)</b> -11.0        | 32           | 11.3                | 27.6                | 10.9                 | 1874           | 50                 | 754           |
|    |            | 275/40R20 | 106T       | XL      | BSW      | 131200       | 9.0- <b>(9.5)</b> -11.0        | 34           | 12.0                | 28.7                | 10.9                 | 2094           | 50                 | 725           |
|    |            | 275/45R20 | 106T       | SL      | BSW      | 131180       | 8.5- <b>(9.0)</b> -10.5        | 36           | 12.0                | 29.8                | 10.7                 | 2094           | 44                 | 698           |
|    |            | 275/50R20 | 109T       | SL      | BSW      | 138440       | 7.5- <b>(8.5)</b> -9.5         | 41           | 12.0                | 30.9                | 11.2                 | 2271           | 44                 | 673           |
|    |            | 275/55R20 | 117T       | XL      | BSW      | 110170       | 7.5- <b>(8.5)</b> -9.5         | 42           | 12.0                | 31.9                | 11.2                 | 2833           | 50                 | 651           |
|    |            | 275/60R20 | 115T       | SL      | BSW      | 110150       | 7.5- <b>(8.0)</b> -9.5         | 47           | 13.7                | 33.0                | 11.0                 | 2679           | 44                 | 630           |
| 21 |            | 285/50R20 | 116T       | XL      | BSW      | 138520       | 8.0- <b>(9.0)</b> -10.0        | 42           | 12.0                | 31.3                | 11.7                 | 2756           | 50                 | 665           |
|    |            | 315/35R20 | 106T       | SL      | BSW      | 131230       | 10.0- <b>(11.0)</b> -12.5      | 38           | 12.0                | 28.7                | 12.6                 | 2094           | 44                 | 725           |
|    |            | 265/45R21 | 104T       | SL      | BSW      | 131170       | 8.5- <b>(9.0)</b> -10.0        | 36           | 12.0                | 30.4                | 10.5                 | 1984           | 44                 | 684           |
|    |            | 285/35R21 | 105T       | XL      | BSW      | 131440       | 9.5- <b>(10.0)</b> -11.0       | 36           | 12.0                | 28.9                | 11.4                 | 2039           | 50                 | 720           |
|    |            | 295/35R21 | 107T       | XL      | BSW      | 131220       | 10.0- <b>(10.5)</b> -11.5      | 38           | 12.0                | 29.1                | 11.9                 | 2149           | 50                 | 714           |
| 22 |            | 295/40R21 | 111T       | XL      | BSW      | 131210       | 10.0- <b>(10.5)</b> -11.5      | 40           | 12.0                | 30.3                | 11.9                 | 2403           | 50                 | 686           |
|    |            | 325/30R21 | 108T       | XL      | BSW      | 132260       | 11.0- <b>(11.5)</b> -12.0      | 41           | 12.0                | 28.7                | 13.0                 | 2205           | 50                 | 724           |
|    |            | 275/40R22 | 107T       | XL      | BSW      | 131430       | 9.0- <b>(9.5)</b> -11.0        | 39           | 12.0                | 30.7                | 10.9                 | 2149           | 50                 | 677           |
|    |            | 275/50R22 | 111T       | SL      | BSW      | 138450       | 7.5- <b>(8.5)</b> -9.5         | 44           | 12.0                | 32.9                | 11.2                 | 2403           | 44                 | 632           |
|    |            | 285/45R22 | 114T       | XL      | BSW      | 139100       | 9.0- <b>(9.5)</b> -10.5        | 40           | 12.0                | 32.1                | 11.2                 | 2601           | 50                 | 647           |

Speed rated "T" = 118mph, "H" = 130mph. "SL" = Standard Load, "XL" = Extra Load, "BSW" = Black Sidewall.  
Bold designates measuring rim width. Observe G3-Ice shown with winter studs. Pinned to accept TSMI #11 stud. \*Inflated dimensions.



STUDLESS LIGHT TRUCK WINTER TIRE

Tough winter jobs just got a little bit easier with the Open Country WLT1. This winter tire provides excellent winter driving capabilities for a variety of heavy-duty light trucks, including pickups, vans, and SUVs. Designed to handle the increased load-carrying capacity of these vehicles, it delivers confident ice and snow performance with long tread life.

POPULAR FITMENTS

Chevrolet Silverado 2500/3500 HD  
GMC Sierra 2500/3500 HD  
Ram 2500/3500  
Ford F-Series  
Mercedes Sprinter



Mountain Snowflake  
qualified for severe  
snow conditions.

WIDER TREAD FOOTPRINT

- Improves stability and handling.

WIDER DEEP GROOVES

- Increases snow traction.
- Prevents snow buildup.

INCREASED SIPE DENSITY

- Improves water evacuation and ice traction.
- Improves cornering performance on ice.

STRAIGHT SIPE AND DIMPLE DESIGN ON OUTSIDE TREAD

- Helps resist wandering.
- Improves traction in deep snow.

HEAVY-DUTY CONSTRUCTION WITH A STIFF RIGID CASING

- Meets the load-carrying, handling, and braking needs of light trucks, vans, and SUVs.
- Improves handling performance.



| WHEEL DIA. | TIRE SIZE   | LOAD/SPEED | LOAD ID | SIDEWALL | PRODUCT CODE | APPROVED RIM WIDTH RANGE (IN.) | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) SINGLE | MAX LOAD (LBS) DUAL | MAX PRESSURE (PSI) | REVS PER MILE |
|------------|-------------|------------|---------|----------|--------------|--------------------------------|--------------|---------------------|---------------------|----------------------|-----------------------|---------------------|--------------------|---------------|
| 16         | LT215/85R16 | 115/112Q   | E       | BSW      | 173100       | 5.5- <b>(6.0)</b> -7.0         | 39           | 15.9                | 30.4                | 8.9                  | 2680                  | 2470                | 80                 | 683           |
|            | LT225/75R16 | 115/112Q   | E       | BSW      | 173300       | <b>(6.0)</b> -7.0              | 39           | 16.1                | 29.4                | 8.9                  | 2680                  | 2470                | 80                 | 707           |
|            | LT235/85R16 | 120/116Q   | E       | BSW      | 173200       | 6.0- <b>(6.5)</b> -7.5         | 45           | 16.1                | 31.9                | 9.3                  | 3042                  | 2778                | 80                 | 652           |
|            | LT245/75R16 | 120/116Q   | E       | BSW      | 173400       | 6.5- <b>(7.0)</b> -8.0         | 46           | 16.3                | 30.6                | 9.9                  | 3042                  | 2778                | 80                 | 680           |
|            | LT265/75R16 | 123/120Q   | E       | BSW      | 173500       | 7.0- <b>(7.5)</b> -8.0         | 48           | 16.5                | 31.7                | 10.7                 | 3415                  | 3085                | 80                 | 655           |
|            | LT285/75R16 | 126/123Q   | E       | BSW      | 173600       | 7.5- <b>(8.0)</b> -9.0         | 52           | 16.5                | 32.8                | 11.4                 | 3750                  | 3415                | 80                 | 633           |
| 17         | LT225/75R17 | 116/113Q   | E       | BSW      | 174000       | <b>(6.0)</b> -7.5              | 39           | 16.1                | 30.4                | 8.9                  | 2755                  | 2535                | 80                 | 683           |
|            | LT235/80R17 | 120/117Q   | E       | BSW      | 173110       | 6.0- <b>(6.5)</b> -7.5         | 45           | 16.1                | 31.9                | 9.4                  | 3085                  | 2835                | 80                 | 651           |
|            | LT245/70R17 | 119/116Q   | E       | BSW      | 173700       | 6.5- <b>(7.0)</b> -8.0         | 43           | 16.3                | 30.6                | 9.7                  | 3000                  | 2755                | 80                 | 678           |
|            | LT245/75R17 | 121/118Q   | E       | BSW      | 174100       | 6.5- <b>(7.0)</b> -7.5         | 45           | 16.3                | 31.6                | 9.8                  | 3195                  | 2910                | 80                 | 658           |
|            | LT265/70R17 | 121/118Q   | E       | BSW      | 173800       | 7.0- <b>(8.0)</b> -8.5         | 49           | 16.5                | 31.8                | 10.7                 | 3195                  | 2910                | 80                 | 654           |
|            | LT285/70R17 | 121/118Q   | E       | BSW      | 173900       | 7.5- <b>(8.5)</b> -9.0         | 52           | 16.5                | 32.8                | 11.5                 | 3195                  | 2910                | 80                 | 633           |
| 18         | LT265/70R18 | 124/121Q   | E       | BSW      | 174510       | 7.0- <b>(8.0)</b> -9.0         | 44           | 16.5                | 32.6                | 10.7                 | 3525                  | 3195                | 80                 | 636           |
|            | LT275/65R18 | 123/120Q   | E       | BSW      | 173120       | 7.5- <b>(8.0)</b> -9.0         | 49           | 16.5                | 32.3                | 10.9                 | 3415                  | 3085                | 80                 | 643           |
| 20         | LT275/70R18 | 125/122Q   | E       | BSW      | 174400       | 7.0- <b>(8.0)</b> -8.5         | 52           | 16.5                | 33.3                | 10.9                 | 3640                  | 3305                | 80                 | 624           |
|            | LT265/60R20 | 121/118Q   | E       | BSW      | 174520       | 7.0- <b>(8.0)</b> -9.5         | 51           | 16.5                | 32.5                | 10.7                 | 3195                  | 2910                | 80                 | 639           |
|            | LT275/65R20 | 126/123Q   | E       | BSW      | 174500       | 7.5- <b>(8.0)</b> -9.5         | 53           | 16.5                | 34.3                | 10.5                 | 3750                  | 3415                | 80                 | 605           |

Speed rated "Q" = 99mph. "E" = 10-ply rating. "BSW" = Black Sidewall.  
Bold designates measuring rim width. \*Inflated dimensions.



ORIGINAL EQUIPMENT

ORIGINAL EQUIPMENT

| MODEL                     | MODEL YEAR | TIRE SIZE        | LOADSPEED | TIRE NAME             | PRODUCT CODE | RIM (IN.)               | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE | UTUG    | ALL-SEASON M&S |
|---------------------------|------------|------------------|-----------|-----------------------|--------------|-------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|---------|----------------|
| AUDI                      |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| Q7                        | 2016       | 255/60R18        | 108Y      | PROXES T1 SPORT SUV A | 103560       | <b>(8.0)</b>            | 35           | 10.3                | 30.2                | 10.6                 | 2205           | 51                 | 689           | 240 AAA | N              |
| Q7                        | 2016       | 285/45R20        | 112Y      | PROXES T1 SPORT SUV B | 103740       | <b>(9.0)</b>            | 37           | 10.2                | 30.4                | 11.2                 | 2469           | 50                 | 683           | 240 AAA | N              |
| RS4                       | 2009-13    | 265/35ZR19 XL    | 98Y       | PROXES T1 A0          | 238870       | 9.0- <b>(9.5)</b> -10.5 | 26           | 9.2                 | 26.3                | 10.7                 | 1653           | 50                 | 791           | 240 AAA | N              |
| RS5                       | 2012-16    | 265/35ZR19 XL    | 98Y       | PROXES T1 A0          | 238870       | 9.0- <b>(9.5)</b> -10.5 | 26           | 9.2                 | 26.3                | 10.7                 | 1653           | 50                 | 791           | 240 AAA | N              |
| S6                        | 2009-13    | 265/35ZR19 XL    | 98Y       | PROXES T1 A0          | 238870       | 9.0- <b>(9.5)</b> -10.5 | 26           | 9.2                 | 26.3                | 10.7                 | 1653           | 50                 | 791           | 240 AAA | N              |
| TT                        | 2011-16    | 255/35R19 XL     | 96Y       | PROXES T1 SPORT A0    | 176700       | 8.5- <b>(9.0)</b> -10.0 | 26           | 10.0                | 25.9                | 10.2                 | 1565           | 50                 | 801           | 240 AAA | N              |
| TT RS                     | 2012-16    | 255/35R19 XL     | 96Y       | PROXES T1 SPORT R01   | 176930       | 8.5- <b>(9.0)</b> -10.0 | 26           | 9.4                 | 25.9                | 10.2                 | 1565           | 50                 | 801           | 240 AAA | N              |
| TTS                       | 2011-16    | 255/35R19 XL     | 96Y       | PROXES T1 SPORT A0    | 176700       | 8.5- <b>(9.0)</b> -10.0 | 26           | 10.0                | 25.9                | 10.2                 | 1565           | 50                 | 801           | 240 AAA | N              |
| DODGE                     |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| JOURNEY                   | 2015-16    | P225/55R19       | 99V       | TOYO A23              | 140540       | <b>(7.0)</b>            | 29           | 9.8                 | 28.9                | 9.0                  | 1709           | 51                 | 720           | 300 AA  | Y              |
| RAM 1500 REBEL            | 2015-16    | LT285/70R17 E/10 | 121/118S  | OPEN COUNTRY A/T II   | 352430       | 7.5- <b>(8.5)</b> -9.0  | 56           | 16.3                | 32.8                | 11.5                 | 3195           | 80                 | 634           | N/A     | Y              |
| FORD                      |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| F250 KING RANCH           | 2014-16    | LT275/65R20 E/10 | 126/123S  | OPEN COUNTRY A/T II   | 352580       | 7.5- <b>(8.0)</b> -9.5  | 57           | 16.0                | 34.1                | 11.0                 | 3750**         | 80                 | 609           | N/A     | Y              |
| INFINITI                  |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| QX60                      | 2016       | 235/65R18        | 106T      | OPEN COUNTRY A25 A    | 301790       | 6.5- <b>(7.0)</b> -8.5  | 31           | 9.7                 | 30.0                | 9.4                  | 2094           | 44                 | 692           | 300 AA  | Y              |
| LEXUS                     |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| ES350                     | 2008-11    | P215/55R17 93V   | 93V       | PROXES J33            | 238130       | 6.0- <b>(7.0)</b> -7.5  | 25           | 10.1                | 26.4                | 8.8                  | 1433           | 44                 | 788           | 220 AA  | N              |
| ES330                     | 2005-11    | P215/55R17 93V   | 93V       | PROXES J33            | 238130       | 6.0- <b>(7.0)</b> -7.5  | 25           | 10.1                | 26.4                | 8.8                  | 1433           | 44                 | 788           | 220 AA  | N              |
| HS 250H                   | 2010-13    | P225/45R18 91W   | 91W       | PROXES A20            | 238900       | <b>(7.5)</b>            | 24           | 9.7                 | 26.0                | 9.1                  | 1356           | 51                 | 798           | 300 AA  | Y              |
| MAZDA                     |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| MAZDA CX-5                | 2013-16    | P225/55R19       | 99V       | TOYO A23              | 140540       | <b>(7.0)</b>            | 29           | 9.8                 | 28.9                | 9.0                  | 1709           | 51                 | 720           | 300 AA  | Y              |
| MAZDA 2                   | 2015       | P185/60R16       | 86H       | PROXES A27            | 201280       | <b>(5.5)</b>            | 17           | 9.4                 | 24.7                | 7.4                  | 1168           | 51                 | 840           | 300 AA  | Y              |
| MAZDA 3                   | 2010-16    | P205/55R16       | 89H       | TOYO A20              | 140500       | <b>(6.5)</b>            | 23           | 9.4                 | 24.7                | 8.4                  | 1279           | 51                 | 840           | 300 AA  | Y              |
| MAZDA 3                   | 2009-11    | P205/50R17       | 88V       | PROXES A18            | 238860       | <b>(7.0)</b>            | 23           | 10.3                | 25.0                | 8.5                  | 1235           | 51                 | 831           | 300 AA  | Y              |
| MAZDA 3                   | 2004-11    | P205/55R16       | 89H       | PROXES A05            | 154620       | 5.5- <b>(6.5)</b> -7.5  | 21           | 10.1                | 24.9                | 8.1                  | 1279           | 44                 | 835           | 300 AA  | Y              |
| MAZDA 3                   | 2004-11    | P195/65R15       | 89H       | PROXES A18            | 154610       | 5.5- <b>(6.0)</b> -7.0  | 19           | 9.7                 | 24.9                | 7.8                  | 1279           | 44                 | 835           | 300 AA  | Y              |
| MAZDA 5                   | 2006-16    | 205/50R17        | 89V       | PROXES A18            | 238820       | 5.5- <b>(6.5)</b> -7.5  | 22           | 10.3                | 25.1                | 8.2                  | 1279           | 44                 | 834           | 300 AA  | Y              |
| MAZDA 5                   | 2006-11    | P205/55R16       | 89H       | PROXES A05            | 154620       | 5.5- <b>(6.5)</b> -7.5  | 21           | 10.1                | 24.9                | 8.1                  | 1279           | 44                 | 835           | 300 AA  | Y              |
| MITSUBISHI                |            |                  |           |                       |              |                         |              |                     |                     |                      |                |                    |               |         |                |
| OUTLANDER/OUTLANDER SPORT | 2013-16    | P225/55R18       | 97H       | TOYO A24 A            | 140550       | <b>(7.0)</b>            | 27           | 10.2                | 27.8                | 9.1                  | 1609           | 51                 | 748           | 300 AA  | Y              |

Speed rated "S" = 112mph, "T" = 118mph, "H" = 130mph, "V" = 149mph, "W" = 168mph, "Y" = 186mph, "XL" = Extra Load. Bold designates measuring rim width. \*Inflated dimensions. \*\*Dual Max Load (LBS) is 3415 at 80 PSI.

| MODEL      | MODEL YEAR | TIRE SIZE  | LOADSPEED | TIRE NAME          | PRODUCT CODE | RIM (IN.)              | WEIGHT (LBS) | TREAD DEPTH (1/32") | OVERALL DIA. (IN.)* | OVERALL WIDTH (IN.)* | MAX LOAD (LBS) | MAX PRESSURE (PSI) | REVS PER MILE | UTUG    | ALL-SEASON M&S |
|------------|------------|------------|-----------|--------------------|--------------|------------------------|--------------|---------------------|---------------------|----------------------|----------------|--------------------|---------------|---------|----------------|
| NISSAN     |            |            |           |                    |              |                        |              |                     |                     |                      |                |                    |               |         |                |
| CUBE       | 2009-14    | P195/60R15 | 87H       | TOYO A20           | 140510       | <b>(6.0)</b>           | 18           | 9.4                 | 24.2                | 8.0                  | 1190           | 51                 | 858           | 300 AAA | Y              |
| CUBE       | 2009-14    | P195/55R16 | 86V       | TOYO A20           | 140520       | <b>(6.0)</b>           | 19           | 9.4                 | 24.5                | 7.7                  | 1168           | 51                 | 847           | 300 AAA | Y              |
| MURANO     | 2016-16    | 235/65R18  | 106T      | OPEN COUNTRY A25 A | 301790       | 6.0- <b>(7.0)</b> -8.5 | 31           | 9.7                 | 30.0                | 9.4                  | 2094           | 44                 | 692           | 300 AAA | Y              |
| MURANO     | 2008-14    | P235/55R20 | 102T      | PROXES A20         | 238850       | <b>(7.5)</b>           | 34           | 9.7                 | 30.2                | 9.6                  | 1874           | 44                 | 689           | 300 AAA | Y              |
| PATHFINDER | 2013-16    | 235/65R18  | 106T      | OPEN COUNTRY A25   | 301840       | <b>(7.5)</b>           | 32           | 9.7                 | 30.1                | 9.7                  | 2094           | 44                 | 690           | 300 AAA | Y              |
| PATHFINDER | 2013-14    | P235/55R20 | 102T      | PROXES A20         | 238850       | <b>(7.5)</b>           | 34           | 9.7                 | 30.2                | 9.6                  | 1874           | 44                 | 689           | 300 AAA | Y              |
| QUEST      | 2011-16    | P235/55R18 | 99T       | TOYO A22           | 140530       | <b>(7.0)</b>           | 30           | 9.4                 | 28.1                | 9.3                  | 1709           | 44                 | 740           | 300 AAA | Y              |
| TITAN      | 2016       | P265/70R18 | 114S      | OPEN COUNTRY A26   | 301870       | 7.0- <b>(8.0)</b> -9.0 | 40           | 11.0                | 32.6                | 10.7                 | 2601           | 44                 | 636           | 400 AAA | Y              |
| SCION      |            |            |           |                    |              |                        |              |                     |                     |                      |                |                    |               |         |                |
| iA         | 2016-16    | P185/60R16 | 86H       | PROXES A27         | 201280       | <b>(5.5)</b>           | 17           | 9.4                 | 24.7                | 7.4                  | 1168           | 51                 | 840           | 300 AA  | Y              |
| iM         | 2016-16    | P225/45R17 | 90V       | PROXES 4 PLUS B    | 177980       | 6.0- <b>(7.0)</b> -8.0 | 21           | 9.3                 | 25.0                | 8.8                  | 1323           | 51                 | 830           | 300 AA  | Y              |
| tC         | 2016-16    | P225/45R18 | 91W       | PROXES A20         | 238900       | <b>(7.5)</b>           | 24           | 9.7                 | 26.0                | 9.1                  | 1356           | 51                 | 798           | 300 AA  | Y              |
| TOYOTA     |            |            |           |                    |              |                        |              |                     |                     |                      |                |                    |               |         |                |
| CAMRY      | 2012-14    | P215/55R17 | 93V       | PROXES R35         | 238920       | 6.0- <b>(7.0)</b> -7.5 | 25           | 10.6                | 27.5                | 8.8                  | 1433           | 51                 | 755           | 300 AA  | N              |
| CAMRY      | 2004-11    | P215/55R17 | 93V       | PROXES J33         | 238130       | 6.0- <b>(7.0)</b> -7.5 | 25           | 10.1                | 26.4                | 8.8                  | 1433           | 44                 | 788           | 220 AA  | N              |
| COROLLA    | 2014-16    | P205/55R16 | 89H       | PROXES 4 PLUS A    | 177970       | <b>(6.5)</b>           | 20           | 10.2                | 24.8                | 8.2                  | 1279           | 51                 | 836           | 300 AA  | Y              |
| HIGHLANDER | 2014-16    | P245/55R19 | 103T      | OPEN COUNTRY A25 B | 301190       | <b>(7.5)</b>           | 32           | 10.5                | 29.6                | 10.0                 | 1929           | 44                 | 701           | 300 AA  | Y              |
| HIGHLANDER | 2008-14    | P245/65R17 | 105S      | OPEN COUNTRY A25 A | 300920       | <b>(7.5)</b>           | 32           | 9.7                 | 29.5                | 10.0                 | 2039           | 44                 | 704           | 300 AA  | Y              |
| HIGHLANDER | 2008-14    | P245/55R19 | 103S      | OPEN COUNTRY A25 A | 300930       | <b>(7.5)</b>           | 32           | 10.1                | 29.6                | 9.8                  | 1929           | 44                 | 703           | 300 AA  | Y              |
| PRIUS      | 2016-16    | P195/65R15 | 89S       | NANOENERGY A29     | 103890       | 6.0- <b>(6.5)</b> -8.0 | 18           | 9.7                 | 25.0                | 8.1                  | 1279           | 44                 | 832           | 300 A B | Y              |
| PRIUS      | 2010-16    | P215/45R17 | 87V       | PROXES A20         | 238880       | <b>(7.0)</b>           | 21           | 9.7                 | 24.7                | 8.6                  | 1201           | 51                 | 842           | 300 AA  | Y              |
| PRIUS V    | 2013-16    | P215/50R17 | 90W       | PROXES A20         | 238930       | 6.0- <b>(7.0)</b> -7.5 | 23           | 9.7                 | 25.5                | 8.7                  | 1323           | 51                 | 816           | 300 AA  | Y              |
| RAV4       | 2016-16    | 235/55R18  | 100H      | OPEN COUNTRY A20   | 301770       | 6.5- <b>(7.5)</b> -8.5 | 28           | 10.3                | 28.1                | 9.6                  | 1764           | 44                 | 738           | 300 AA  | Y              |
| RAV4       | 2013-15    | 235/55R18  | 100H      | OPEN COUNTRY A20   | 301000       | 6.5- <b>(7.5)</b> -8.5 | 28           | 10.3                | 28.2                | 9.4                  | 1764           | 44                 | 738           | 300 AA  | Y              |
| RAV4       | 2009-14    | 235/55R18  | 99H       | OPEN COUNTRY A20   | 300490       | 6.5- <b>(7.5)</b> -8.5 | 27           | 10.3                | 28.2                | 9.4                  | 1709           | 44                 | 737           | 300 AA  | Y              |
| RAV4       | 2009-13    | 235/55R18  | 101H      | OPEN COUNTRY A20   | 300780       | <b>(7.0)</b>           | 26           | 10.1                | 28.6                | 9.1                  | 1819           | 44                 | 727           | 300 AA  | Y              |
| RAV4       | 2007-13    | 215/70R16  | 99H       | TRANPATH A14       | 120930       | <b>(6.5)</b>           | 23           | 9.7                 | 27.8                | 8.5                  | 1709           | 44                 | 747           | 300 AA  | Y              |
| TACOMA     | 2016-16    | P265/65R17 | 110S      | OPEN COUNTRY A30   | 310310       | 7.5- <b>(8.0)</b> -9.5 | 36           | 11.1                | 30.6                | 10.7                 | 2337           | 44                 | 680           | 300 A B | Y              |
| TACOMA     | 2016-16    | P245/75R16 | 109S      | OPEN COUNTRY A31   | 310300       | 6.5- <b>(7.0)</b> -8.0 | 32           | 11.6                | 30.5                | 9.8                  | 2271           | 44                 | 682           | 300 A B | Y              |
| VENZA      | 2010-16    | P245/55R19 | 103S      | OPEN COUNTRY A20 A | 300930       | <b>(7.5)</b>           | 32           | 10.1                | 29.6                | 9.8                  | 1929           | 44                 | 703           | 300 AA  | Y              |

ORIGINAL EQUIPMENT





WARNING

TIRES MUST NEVER BE OPERATED IN EXCESS OF THEIR RATED SPEED LIMIT!

Exceeding the tire’s speed capability will cause overheating of the tire and sudden tire failure, possibly leading to loss of vehicle control. All Toyo passenger, light truck, and truck tires have a maximum speed rating depending on size and type. Consult your tire dealer or contact Toyo Tire if you are not sure about the maximum speed rating of your tires. Toyo Tire U.S.A. Corp. does not endorse the operation of any vehicle in an unsafe or unlawful manner. Obey all local speed limits. Tire speed ratings do not imply that a vehicle can be safely driven at the speed for which the tire is rated. Speed ratings are based on laboratory tests that relate to performance on the road, but are not applicable if tires are underinflated, overloaded, worn out, damaged, or altered.



WARNING

USE AND INSTALLATION OF WINTER (SNOW) TIRES

Winter driving presents special challenges for vehicle handling. The use of winter tires, studs, and/or chains, while improving snow traction performance, requires additional caution with regard to braking, cornering, and speed. The use of snow tires may reduce the vehicle’s handling and braking capability. It is important to drive with care not only on snow and ice, but on dry and wet roads as well. Toyo recommends that snow tires be installed in matched sets of four. This also applies for studded winter tires. When snow tires of a lower speed rating compared to the original tires are installed, the vehicle’s speed capability is reduced. Follow all recommendations in the vehicle owner’s manual regarding the use of winter tires. Consult your tire dealer for information regarding seasonal restrictions for stud usage.



WARNING

PROPER SELECTION OF REPLACEMENT TIRES

Replacement tires for any vehicle must be of a size, load range, and load capacity (by inflation) that are capable of supporting the load of the vehicle’s originally installed (OE) tires. Failure to install tires with adequate load capacity will result in tire fatigue and sudden tire failure, leading to possible loss of control or an accident.

**IMPORTANT!** Refer to the vehicle owner’s manual for any specific safety advice regarding the application of replacement tires.



WARNING

TIRE AND RIM MATCHING

**NEVER MOUNT 16” RIM DIAMETER TIRES ON A 16.5” DIAMETER RIM!** Any attempt to mount a 16” rim diameter tire on a 16.5” diameter rim will result in an explosion of the tire/rim assembly that can cause severe personal injury or death. Prior to mounting any 16” rim diameter tires, always check the rim/wheel identification stamp to verify the correct rim diameter. Always check the tire size molded onto the sidewall. NEVER exceed 40 psi when seating the beads on rims.

Warning for additional sizes:  
To avoid an explosion of the tire/rim assembly and personal injury or death:  
- **Never attempt to mount 22” rim diameter tires on any 22.5” diameter rim!**  
- **Never attempt to mount 24” rim diameter tires on any 24.5” diameter rim!**



WARNING

REPLACEMENT TIRES FOR LIGHT TRUCKS — P-METRIC VS. LT-METRIC

Tire installers should exercise extreme caution when replacing tires on light trucks. LT-metric type tires (e.g., LT265/75R16) may not offer adequate load capacity when replacing P-metric type tires (e.g., P265/75R16), depending on the vehicle’s load requirements and the tire’s load/ply rating. **LT-metric type tires require much higher air pressures to carry equivalent loads of P-metric tires.**

If P-metric type tires are used to replace LT-metric tires, installers should verify the load requirement of the vehicle by checking the tire information placard. Always make sure that replacement tires offer equal or greater load capacity (by inflation) compared to the originally installed tires.

If P-metric or metric tires are intended to replace originally installed LT-metric type tires, the load capacity of the P-metric tire is reduced by 9% at any inflation value. Consult manufacturer’s load and inflation charts.



DANGER

Always stand well clear of any tire mounting operation. This is especially important when the service operator inflates the tire. If the tire has been improperly mounted, it may burst with explosive force, causing serious personal injury or death.

**A new valve must be installed on the rim each time a worn-out passenger or light truck tire is replaced.**



DANGER

Removing and replacing tires on wheels can be dangerous. Attempting to mount tires with improper tools or procedures may result in a tire explosion, causing serious personal injury or death. This is a job for your authorized Toyo Tire dealer or other qualified tire service location only.



DANGER

**NOTE TO PROFESSIONAL TIRE INSTALLERS:** Exceeding the maximum bead seating pressure. The tire service person must **NEVER** INFLATE BEYOND 40 POUNDS PRESSURE TO SEAT BEADS unless specified by the tire manufacturer! **NEVER STAND, LEAN, OR REACH OVER THE ASSEMBLY DURING INFLATION!**

**\*\*IF REPLACING FEWER THAN FOUR (4) TIRES\*\***

IMPORTANT!

In some cases, the vehicle manufacturer may specifically advise against replacing fewer than all four tires. Always check and follow the recommendations in the vehicle owner’s manual. For 4WD and AWD vehicles, even small differences in outside diameter may cause drive-train damage or mechanical malfunction.

When replacing tires on a vehicle, it is recommended and preferred that all four tires be replaced at the same time for continued optimal vehicle performance. However, for those cases where this is not feasible, below are some general guidelines to consider when replacing fewer than four tires for a light vehicle, whether it is one or two tires. If the vehicle manufacturer has alternate recommendations, always follow their recommendations.

**REPLACING TWO (2) TIRES** — When a pair of replacement tires is selected in the same size and construction as those on the vehicle, the two newer tires must be installed on the rear axle. All tires must be the same speed rating and must be of equal or higher speed rating than the tire that came as original equipment on the vehicle. New tires with deeper tread will provide better grip and evacuate water more effectively, which is important as a driver approaches (wet) hydroplaning situations. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.

**REPLACING ONE (1) TIRE** — Replacing a single tire on a vehicle can have an adverse effect on suspension systems, gear ratios, transmission, and tire treadwear. If single-tire replacement is unavoidable, it is recommended that the single new tire be paired with the tire that has the deepest tread depth and both be placed on the rear axle. Placing greater traction on the rear axle on wet surfaces is necessary to prevent a possible oversteer condition and loss of vehicle stability and control.



CONSUMER ADVISORY




TSD-12-012

ROLLOVER PROPENSITY OF LIFTED LIGHT TRUCKS



Consumers should be aware that the installation of larger-diameter tires, including off-road type tires, combined with modified suspensions (lift kits) for increased off-road ground clearance will adversely affect the handling and maneuverability characteristics of the vehicle compared to the factory-equipped (original) vehicle.

When vehicles, especially light trucks, are lifted, the center of gravity is heightened, thus making them more prone to rollover. Rollover propensity is further increased with full passenger and/or cargo loads. Other aspects of handling and maneuverability may also be affected by altering the original manufacturer's design.

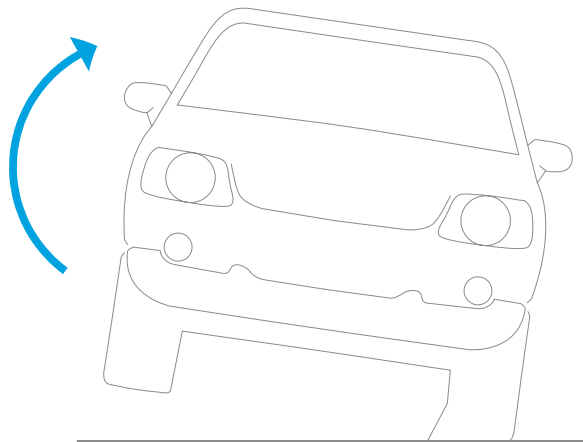

As with any vehicle, Extreme Care must be used to prevent loss of control or rollover during sharp turns or abrupt maneuvers.

Always wear seat belts and drive safely, recognizing that reduced speeds and specialized driving techniques may be required.



The installation of larger tire and wheel combinations will reduce the effectiveness of anti-lock braking systems and increase stopping distance.

Failure to safely drive any vehicle equipped with a lift kit may result in an accident resulting in serious injury or death.

Do not drive a lifted vehicle unless you are familiar with its unique handling characteristics and are confident of your ability to maintain control under all driving conditions. Some modifications (and combinations of modifications) are not recommended and may not be permitted in your state.

Consult your owner's manual, the instructions accompanying the lift kit, and state laws before undertaking any vehicle suspension modifications.

You are responsible for the legality and safety of the vehicle you modify using lift-kit and tire modifications.

CONSUMER ADVISORY



TSD-12-009

RECOMMENDATIONS ON THE PROPER USE AND HANDLING OF CERTAIN TOYO TIRES

This advisory supersedes TSD-09-001, dated May 29, 2009, and applies only to the following products:

All Proxes® RR      All Proxes® RS1      All Proxes® RA1  
All Proxes® R1R      All Proxes® R888

This advisory addresses the proper use and handling of these tires in colder climates. Tires exposed to temperatures below 15°F (-9°C) will lose rubber compound flexibility. Under certain conditions, they may even experience cracking (see image below).



The rubber compounds used in these tires have unique properties that, when compared to other tires, can cause them to lose some of their flexibility when used or handled in conditions below 15°F (-9°C). This loss in flexibility can lead to potential cracking and other damage to the tire.

**TO MINIMIZE THE CHANCES OF THIS HAPPENING, CONSUMERS AND INSTALLERS ARE ADVISED TO FOLLOW THESE INSTRUCTIONS:**

1. Do not move or operate the car with these tires in conditions below 15°F (-9°C). **ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!**
2. Avoid moving these tires in conditions below 15°F (-9°C).
3. Before mounting or dismounting, store these tires for at least 24 hours in a temperature-controlled environment of 68°F (20°C) or warmer, and **ALWAYS INSPECT FOR SIGNS OF CRACKING! NEVER USE TIRES THAT HAVE CRACKED!**
4. Remove these tires from the vehicle and deflate to half the normal air pressure during prolonged periods of non-use or storage.

Item # 0180253  
4M

TSD-12-009 08/12



TECHNICAL BULLETIN



TSD-12-005

LOAD CAPACITY OF TOYO PROXES® TQ™ TIRES

Toyo Tire U.S.A. Corp. is introducing the following sizes in the Proxes TQ product line that are designed using the Light Load (LL) standard of the Tire and Rim Association (T.R.A.);

- P275/45R16 94 LL  
P275/40R17 93 LL
- P315/35R17 93 LL  
P345/40R17 106 LL
- P315/35R18 95 LL

LOAD IDENTIFICATION:

Under the T.R.A.'s designation, tire load is divided into three categories: Light Load (LL), Standard Load (SL), and Extra Load (XL). Each refers to the tire's ability to carry a certain load at a given air pressure. Tires designed for LL, SL, and XL duty are usually identified as such on the tire sidewall.



Figure 1—Light Load molded into sidewall

**CAUTION** A Light Load tire carries less load at the same inflation pressure and has a lower maximum load capacity than the equivalent Standard Load size. Figure 2 below shows the different load capacities of the three different categories of tires of the same size.

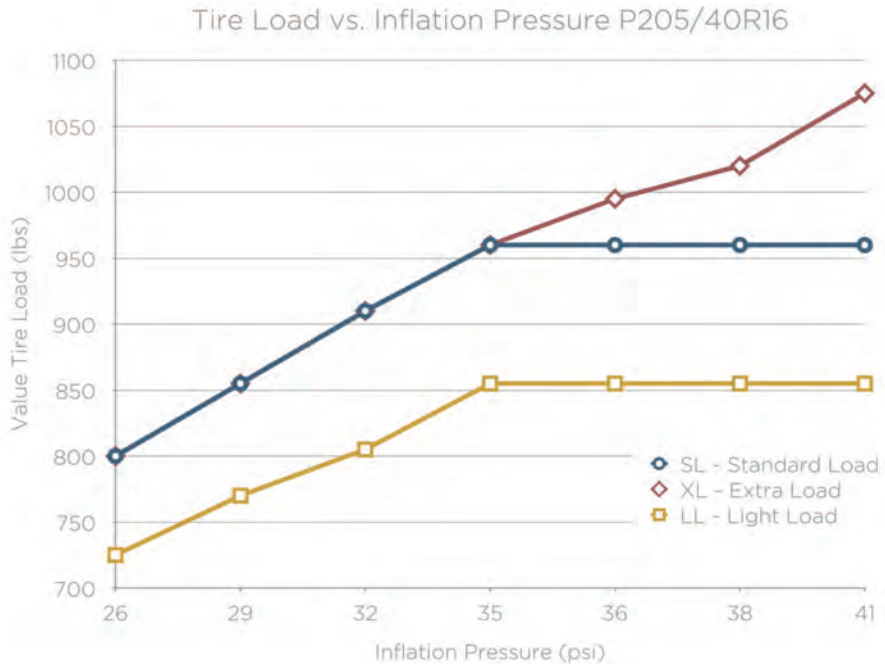


Figure 2—Tire Load vs. Inflation chart

GENERAL ADVICE FOR DETERMINING CORRECT INFLATION PRESSURE:

“Plus size” tires, including the subject tires, may require higher inflation pressures than what is indicated on the vehicle Tire Information Placard or in the vehicle Owner’s Manual. Any “plus size” tire should be inflated to a pressure that provides equal or greater load capacity compared to the original equipment (OE) tire. Always refer to tire industry load and inflation tables to determine correct inflation values when installing “plus sizes,” or contact Toyo Tires for assistance.



Always observe this advice to avoid overloading the tire. Tire overload will contribute to tire fatigue and eventual tire failure. Tire failure may lead to an accident, which may result in injury or death.

Single Load per tire in pounds

| Size             | Tire Load Limit at Various Cold Inflation Pressures |       |       |       |       |       |
|------------------|-----------------------------------------------------|-------|-------|-------|-------|-------|
|                  | PSI                                                 | 26    | 29    | 32    | 35    | 36    |
| P275/45R16 94LL  | lbs.                                                | 1,190 | 1,279 | 1,356 | 1,433 | 1,477 |
| P275/40R17 93LL  | lbs.                                                | 1,235 | 1,301 | 1,367 | 1,433 | —     |
| P315/35R17 93LL  | lbs.                                                | 1,246 | 1,323 | 1,378 | 1,433 | —     |
| P345/40R17 106LL | lbs.                                                | 1,687 | 1,808 | 1,929 | 2,039 | 2,094 |
| P315/35R18 95LL  | lbs.                                                | 1,224 | 1,312 | 1,400 | 1,477 | 1,521 |

Figure 3—T.R.A. Load & Inflation Table



QUICK REFERENCE GUIDE — LIGHT TRUCK/SUV/CUV

QUICK REFERENCE GUIDE

| WHEEL DIA. | TIRE SIZE     | LOAD ID | OPEN COUNTRY MT | OPEN COUNTRY RT | OPEN COUNTRY AT II | OPEN COUNTRY MT | OPEN COUNTRY QT | PROXES ST II | PROXES ST | CELSIUS CUV | OPEN COUNTRY CT | M-55  |
|------------|---------------|---------|-----------------|-----------------|--------------------|-----------------|-----------------|--------------|-----------|-------------|-----------------|-------|
| 15         | PAGE          |         | 10-13           | 14-15           | 16-19              | 20-23           | 24-27           | 28-29        | 30-31     | 32-33       | 34-35           | 36-37 |
|            | P215/75R15    | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT215/75R15   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P225/70R15    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P225/75R15    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/70R15    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/75R15    | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT235/75R15   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/70R15    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/75R15    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 30X9.50R15LT  |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 31X10.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 33X10.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 33X12.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 33X13.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
| 16         | 35X13.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 37X14.50R15LT | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 215/65R16     | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 215/70R16     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P215/70R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT215/85R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 225/70R16     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P225/70R16    | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P225/75R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT225/75R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/60R16     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/65R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/70R16    | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/75R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT235/85R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/70R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/75R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT245/75R16   | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT245/75R16   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/65R16     | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/70R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT255/85R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 265/70R16     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/70R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/75R16    | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT265/75R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT265/75R16   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 275/60R16     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P275/70R16    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT285/75R16   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT295/75R16   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT305/70R16   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT315/75R16   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT385/70R16   | D       |                 |                 |                    |                 |                 |              |           |             |                 |       |
| 17         | 225/55R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 225/60R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 225/65R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/55R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/60R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/60R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/65R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/65R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/70R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/75R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT235/80R17   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/65R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/70R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT245/70R17   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/75R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT245/75R17   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/60R17     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/65R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/70R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/75R17    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
| 18         | 235/55R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/60R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/65R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P235/65R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 245/60R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/60R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/45R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/50R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/55R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/60R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/65R18    | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/70R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/70R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 265/60R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/60R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/65R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P265/70R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT265/70R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P275/60R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P275/65R18    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
| 19         | LT275/65R18   | C       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT275/65R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT275/70R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 285/60R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT285/60R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT285/65R18   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT285/70R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT285/75R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 295/45R18     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT295/70R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT315/70R18   | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT325/60R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | LT325/65R18   |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 33X12.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 33X12.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 35X12.50R18LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 35X12.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 37X13.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 38X13.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 38X15.50R18LT |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
| 20         | P225/55R19    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/50R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 235/55R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P245/55R19    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/50R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/55R19     | E       |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | 255/60R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |       |
|            | P255/60R19    |         |                 |                 |                    |                 |                 |              |           |             |                 |       |

"C" = 6-ply rating, "D" = 8-ply rating, "E" = 12-ply rating, "F" = 12-ply rating.

QUICK REFERENCE GUIDE



QUICK REFERENCE GUIDE — LIGHT TRUCK/SUV/CUV

| WHEEL DIA. | TIRE SIZE     | LOAD ID | OPEN COUNTRY MT | OPEN COUNTRY RT | OPEN COUNTRY AT II | OPEN COUNTRY HT | OPEN COUNTRY QT | PROXES ST II | PROXES ST | CELSIUS CUV | OPEN COUNTRY CT | M-55 |
|------------|---------------|---------|-----------------|-----------------|--------------------|-----------------|-----------------|--------------|-----------|-------------|-----------------|------|
| 19         | 275/45R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 275/55R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 285/45R19     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 235/55R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | P235/55R20    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 245/50R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | P245/50R20    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 255/40R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 255/45R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 255/50R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
| 20         | 255/55R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | P255/55R20    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 265/45R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 265/50R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT265/60R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 275/40R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 275/45R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 275/55R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | P275/55R20    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT275/55R20   | D       |                 |                 |                    |                 |                 |              |           |             |                 |      |
| 21         | P275/60R20    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT275/65R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 285/50R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT285/55R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 295/40R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 295/45R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT295/55R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT295/60R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT295/65R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 305/50R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
| 22         | LT305/55R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT305/55R20   | F       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 315/35R20     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT315/60R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT325/60R20   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 33X12.50R20LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 35X12.50R20LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 35X12.50R20LT | F       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 35X13.50R20LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 37X12.50R20LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
| 23         | 37X13.50R20LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 38X13.50R20LT | D       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 38X15.50R20LT | D       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 40X15.50R20LT | D       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 265/35R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 265/40R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 265/45R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 285/35R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 285/40R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 285/45R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
| 24         | P285/45R22    |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 305/40R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 305/45R22     |         |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | LT325/50R22   | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 33X12.50R22LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 35X12.50R22LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 35X12.50R22LT | F       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 37X12.50R22LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 37X13.50R22LT | E       |                 |                 |                    |                 |                 |              |           |             |                 |      |
|            | 40X15.50R22LT | D       |                 |                 |                    |                 |                 |              |           |             |                 |      |

"C" = 6-ply rating, "D" = 8-ply rating, "E" = 12-ply rating, "F" = 12-ply rating.

QUICK REFERENCE GUIDE — PASSENGER CAR

| WHEEL DIA. | TIRE SIZE  | PROXES I | PROXES P1R | PROXES T1 SPORT | PROXES T1R | PROXES 4 PLUS | PROXES P888R | PROXES P888 | PROXES RR | PROXES RAI | PROXES RST | PROXES TQ | VERSADO NOIR | VERSADO ECO | EXTENSA HP | EXTENSA MS | CELSIUS |
|------------|------------|----------|------------|-----------------|------------|---------------|--------------|-------------|-----------|------------|------------|-----------|--------------|-------------|------------|------------|---------|
|            | PAGE       | 42-43    | 44-45      | 46-47           | 48-49      | 50-53         | 56-57        | 58-59       | 60-61     | 62-63      | 64-65      | 66-67     | 72-73        | 74-75       | 76-77      | 78-79      | 80-81   |
| 13         | P155/80R13 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P175/70R13 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/60R13  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P185/70R13 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 205/60R13  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 225/45R13  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P175/65R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/60R14  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P185/60R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/65R14  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
| 14         | P185/65R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P185/70R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P185/75R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/60R14  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P195/70R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P195/75R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 205/55R14  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P205/70R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P205/75R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P215/70R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
| 15         | P215/75R14 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 225/50R14  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 175/65R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/55R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/60R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 185/65R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P185/65R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/45R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/50R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/55R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
| 16         | P195/55R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/60R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P195/60R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 195/65R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P195/65R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 205/50R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 205/60R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P205/60R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | 205/65R15  |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |
|            | P205/65R15 |          |            |                 |            |               |              |             |           |            |            |           |              |             |            |            |         |



QUICK REFERENCE GUIDE — PASSENGER CAR

QUICK REFERENCE GUIDE

| WHEEL DIA. | TIRE SIZE  | PROXES I | PROXES P1R | PROXES T1 SPORT | PROXES T1R | PROXES 4 PLUS | PROXES P888R | PROXES P888 | PROXES RR | PROXES RAI | PROXES RS1 | PROXES TQ | VERSADO NOIR | VERSADO ECO | CELSIUS | EXTENSA HP | EXTENSA M/S |
|------------|------------|----------|------------|-----------------|------------|---------------|--------------|-------------|-----------|------------|------------|-----------|--------------|-------------|---------|------------|-------------|
| 16         | 205/50R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 205/55R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P205/55R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 205/60R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P205/60R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 205/65R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P205/65R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/55R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/60R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/60R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/65R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/45R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/50R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/50R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/55R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/55R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/60R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/60R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/65R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/60R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P235/60R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/65R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/45R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/50R16  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P255/50R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P275/45R16 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 17         | 205/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 205/45R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 205/50R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/45R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/45R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/50R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/50R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/55R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/55R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/60R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/60R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/65R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P215/65R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/45R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/50R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/50R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/55R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/55R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/60R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/60R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/45R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/50R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/55R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/35R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/45R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P245/45R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/50R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/40R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P275/40R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/35R17  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P315/35R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P345/40R17 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |

QUICK REFERENCE GUIDE

| WHEEL DIA. | TIRE SIZE  | PROXES I | PROXES P1R | PROXES T1 SPORT | PROXES T1R | PROXES 4 PLUS | PROXES P888R | PROXES P888 | PROXES RR | PROXES RAI | PROXES RS1 | PROXES TQ | VERSADO NOIR | VERSADO ECO | CELSIUS | EXTENSA HP | EXTENSA M/S |
|------------|------------|----------|------------|-----------------|------------|---------------|--------------|-------------|-----------|------------|------------|-----------|--------------|-------------|---------|------------|-------------|
| 18         | 215/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/45R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 215/55R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/45R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/45R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/50R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/55R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/60R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P225/60R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/45R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/50R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/55R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 18         | 245/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/45R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/50R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P245/55R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/640R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/45R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P275/35R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/40R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/30R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 19         | 285/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/650R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/680R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/30R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 305/35R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/30R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P315/35R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 335/30R18  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 335/710R18 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/40R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/45R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/40R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/40R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/45R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/50R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/40R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/45R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/40R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/35R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 305/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/25R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 325/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 345/30R19  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |



QUICK REFERENCE GUIDE — PASSENGER CAR

| WHEEL DIA. | TIRE SIZE  | PROXES 1 | PROXES R1R | PROXES T1 SPORT | PROXES T1R | PROXES 4 PLUS | PROXES R888R | PROXES R888 | PROXES RR | PROXES RAI | PROXES RS1 | PROXES TQ | VERSADO NOIR | VERSADO ECO | CELSIUS | EXTENSA HP | EXTENSA M/S |
|------------|------------|----------|------------|-----------------|------------|---------------|--------------|-------------|-----------|------------|------------|-----------|--------------|-------------|---------|------------|-------------|
| 20         | 225/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 225/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 235/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/40R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/45R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/40R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/45R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/40R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 21         | 305/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 305/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/30R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 315/35R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 325/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 345/25R20  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/30R21  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/30R21  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/25R21  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 22         | 235/30R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 245/30R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/30R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 255/35R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/30R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 265/35R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/25R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 285/30R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 295/25R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 305/25R22  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
| 24         | 255/30R24  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | P275/25R24 |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            | 275/30R24  |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |
|            |            |          |            |                 |            |               |              |             |           |            |            |           |              |             |         |            |             |

• Available in Proxes 4.

QUICK REFERENCE GUIDE — WINTER

| WHEEL DIA. | TIRE SIZE   | LOAD ID | OBSERVE GSI-5 | OBSERVE GAIT KK | OBSERVE G3-ICE | OPEN COUNTRY M/T1 | CELSIUS | CELSIUS C/W |
|------------|-------------|---------|---------------|-----------------|----------------|-------------------|---------|-------------|
| 13         | PAGE        |         | 86-89         | 90-91           | 92-95          | 96-97             | 80-81   | 32-33       |
|            | 155/80R13   |         |               |                 |                |                   |         |             |
|            | 175/70R13   |         |               |                 |                |                   |         |             |
|            | 175/65R14   |         |               |                 |                |                   |         |             |
|            | 175/70R14   |         |               |                 |                |                   |         |             |
|            | 185/60R14   |         |               |                 |                |                   |         |             |
|            | 185/65R14   |         |               |                 |                |                   |         |             |
|            | 185/70R14   |         |               |                 |                |                   |         |             |
|            | 195/60R14   |         |               |                 |                |                   |         |             |
|            | 195/70R14   |         |               |                 |                |                   |         |             |
| 14         | P205/75R14  |         |               |                 |                |                   |         |             |
|            | 145/65R15   |         |               |                 |                |                   |         |             |
|            | 175/55R15   |         |               |                 |                |                   |         |             |
|            | 175/65R15   |         |               |                 |                |                   |         |             |
|            | 185/55R15   |         |               |                 |                |                   |         |             |
|            | 185/60R15   |         |               |                 |                |                   |         |             |
|            | 185/65R15   |         |               |                 |                |                   |         |             |
|            | 195/50R15   |         |               |                 |                |                   |         |             |
|            | 195/55R15   |         |               |                 |                |                   |         |             |
|            | 195/60R15   |         |               |                 |                |                   |         |             |
| 15         | 195/65R15   |         |               |                 |                |                   |         |             |
|            | 205/60R15   |         |               |                 |                |                   |         |             |
|            | 205/65R15   |         |               |                 |                |                   |         |             |
|            | 205/70R15   |         |               |                 |                |                   |         |             |
|            | P205/70R15  |         |               |                 |                |                   |         |             |
|            | 205/75R15   |         |               |                 |                |                   |         |             |
|            | P205/75R15  |         |               |                 |                |                   |         |             |
|            | 215/60R15   |         |               |                 |                |                   |         |             |
|            | 215/65R15   |         |               |                 |                |                   |         |             |
|            | 215/70R15   |         |               |                 |                |                   |         |             |
| 16         | P215/75R15  |         |               |                 |                |                   |         |             |
|            | 225/70R15   |         |               |                 |                |                   |         |             |
|            | P225/75R15  |         |               |                 |                |                   |         |             |
|            | 225/80R15   |         |               |                 |                |                   |         |             |
|            | 235/75R15   |         |               |                 |                |                   |         |             |
|            | 265/70R15   |         |               |                 |                |                   |         |             |
|            | 265/75R15   |         |               |                 |                |                   |         |             |
|            | 175/80R16   |         |               |                 |                |                   |         |             |
|            | 185/50R16   |         |               |                 |                |                   |         |             |
|            | 185/55R16   |         |               |                 |                |                   |         |             |
| 16         | P185/60R16  |         |               |                 |                |                   |         |             |
|            | 195/45R16   |         |               |                 |                |                   |         |             |
|            | 195/50R16   |         |               |                 |                |                   |         |             |
|            | 195/55R16   |         |               |                 |                |                   |         |             |
|            | 205/50R16   |         |               |                 |                |                   |         |             |
|            | 205/55R16   |         |               |                 |                |                   |         |             |
|            | 205/60R16   |         |               |                 |                |                   |         |             |
|            | 205/65R16   |         |               |                 |                |                   |         |             |
|            | P205/70R16  |         |               |                 |                |                   |         |             |
|            | 215/55R16   |         |               |                 |                |                   |         |             |
| 16         | 215/60R16   |         |               |                 |                |                   |         |             |
|            | 215/65R16   |         |               |                 |                |                   |         |             |
|            | 215/70R16   |         |               |                 |                |                   |         |             |
|            | 215/75R16   |         |               |                 |                |                   |         |             |
|            | LT215/85R16 | E       |               |                 |                |                   |         |             |
|            | 225/50R16   |         |               |                 |                |                   |         |             |
|            | 225/55R16   |         |               |                 |                |                   |         |             |
|            | 225/60R16   |         |               |                 |                |                   |         |             |
|            | 225/65R16   |         |               |                 |                |                   |         |             |
|            | 225/70R16   |         |               |                 |                |                   |         |             |
| 16         | 225/75R16   |         |               |                 |                |                   |         |             |
|            | LT225/75R16 | E       |               |                 |                |                   |         |             |
|            | 235/60R16   |         |               |                 |                |                   |         |             |
|            | 235/65R16   |         |               |                 |                |                   |         |             |

"E" = 10-ply rating.

QUICK REFERENCE GUIDE — WINTER

QUICK REFERENCE GUIDE

| WHEEL DIA. | TIRE SIZE   | LOAD ID | OBSERVE 65-5 | OBSERVE 68T RX | OBSERVE G3-ICE | OPEN COUNTRY WLT | CELSIUS | CELSIUS CUV |
|------------|-------------|---------|--------------|----------------|----------------|------------------|---------|-------------|
| 16         | 235/70R16   |         |              |                |                |                  |         |             |
|            | 235/75R16   |         |              |                |                |                  |         |             |
|            | LT235/85R16 | E       |              |                |                |                  |         |             |
|            | 245/70R16   |         |              |                |                |                  |         |             |
|            | 245/75R16   |         |              |                |                |                  |         |             |
|            | LT245/75R16 | E       |              |                |                |                  |         |             |
|            | 255/65R16   |         |              |                |                |                  |         |             |
|            | 255/70R16   |         |              |                |                |                  |         |             |
|            | 265/70R16   |         |              |                |                |                  |         |             |
|            | 265/75R16   |         |              |                |                |                  |         |             |
|            | LT265/75R16 | E       |              |                |                |                  |         |             |
|            | 275/70R16   |         |              |                |                |                  |         |             |
|            | LT285/75R16 | E       |              |                |                |                  |         |             |
|            |             |         |              |                |                |                  |         |             |
| 17         | 205/50R17   |         |              |                |                |                  |         |             |
|            | 215/40R17   |         |              |                |                |                  |         |             |
|            | 215/45R17   |         |              |                |                |                  |         |             |
|            | 215/50R17   |         |              |                |                |                  |         |             |
|            | 215/55R17   |         |              |                |                |                  |         |             |
|            | 215/60R17   |         |              |                |                |                  |         |             |
|            | P215/65R17  |         |              |                |                |                  |         |             |
|            | 225/45R17   |         |              |                |                |                  |         |             |
|            | 225/50R17   |         |              |                |                |                  |         |             |
|            | 225/55R17   |         |              |                |                |                  |         |             |
|            | 225/60R17   |         |              |                |                |                  |         |             |
|            | 225/65R17   |         |              |                |                |                  |         |             |
|            | LT225/75R17 | E       |              |                |                |                  |         |             |
|            | 235/45R17   |         |              |                |                |                  |         |             |
|            | 235/50R17   |         |              |                |                |                  |         |             |
|            | 235/55R17   |         |              |                |                |                  |         |             |
|            | 235/60R17   |         |              |                |                |                  |         |             |
|            | 235/65R17   |         |              |                |                |                  |         |             |
|            | LT235/80R17 | E       |              |                |                |                  |         |             |
|            | 245/40R17   |         |              |                |                |                  |         |             |
|            | 245/45R17   |         |              |                |                |                  |         |             |
|            | 245/65R17   |         |              |                |                |                  |         |             |
|            | P245/65R17  |         |              |                |                |                  |         |             |
|            | 245/70R17   |         |              |                |                |                  |         |             |
|            | LT245/70R17 | E       |              |                |                |                  |         |             |
|            | LT245/75R17 | E       |              |                |                |                  |         |             |
|            | 255/60R17   |         |              |                |                |                  |         |             |
|            | 255/65R17   |         |              |                |                |                  |         |             |
|            | P255/70R17  |         |              |                |                |                  |         |             |
|            | 265/65R17   |         |              |                |                |                  |         |             |
|            | 265/70R17   |         |              |                |                |                  |         |             |
|            | LT265/70R17 | E       |              |                |                |                  |         |             |
|            | 275/65R17   |         |              |                |                |                  |         |             |
|            | P285/70R17  |         |              |                |                |                  |         |             |
|            | LT285/70R17 | E       |              |                |                |                  |         |             |
|            |             |         |              |                |                |                  |         |             |
| 18         | 215/50R18   |         |              |                |                |                  |         |             |
|            | P215/55R18  |         |              |                |                |                  |         |             |
|            | 225/40R18   |         |              |                |                |                  |         |             |
|            | 225/45R18   |         |              |                |                |                  |         |             |
|            | 225/50R18   |         |              |                |                |                  |         |             |
|            | 225/55R18   |         |              |                |                |                  |         |             |
|            | 225/60R18   |         |              |                |                |                  |         |             |
|            | 235/40R18   |         |              |                |                |                  |         |             |
|            | 235/45R18   |         |              |                |                |                  |         |             |
|            | 235/50R18   |         |              |                |                |                  |         |             |
|            | 235/55R18   |         |              |                |                |                  |         |             |
|            | 235/60R18   |         |              |                |                |                  |         |             |
|            | 235/65R18   |         |              |                |                |                  |         |             |
|            | P235/65R18  |         |              |                |                |                  |         |             |
|            | 245/40R18   |         |              |                |                |                  |         |             |
|            | 245/45R18   |         |              |                |                |                  |         |             |
|            |             |         |              |                |                |                  |         |             |
|            |             |         |              |                |                |                  |         |             |

"E" = 10-ply rating.

QUICK REFERENCE GUIDE

| WHEEL DIA. | TIRE SIZE   | LOAD ID | OBSERVE 65-5 | OBSERVE 68T RX | OBSERVE G3-ICE | OPEN COUNTRY WLT | CELSIUS | CELSIUS CUV |
|------------|-------------|---------|--------------|----------------|----------------|------------------|---------|-------------|
| 18         | 245/50R18   |         |              |                |                |                  |         |             |
|            | 245/60R18   |         |              |                |                |                  |         |             |
|            | 255/45R18   |         |              |                |                |                  |         |             |
|            | 255/55R18   |         |              |                |                |                  |         |             |
|            | 255/60R18   |         |              |                |                |                  |         |             |
|            | P255/65R18  |         |              |                |                |                  |         |             |
|            | P255/70R18  |         |              |                |                |                  |         |             |
|            | 265/60R18   |         |              |                |                |                  |         |             |
|            | 265/65R18   |         |              |                |                |                  |         |             |
|            | P265/70R18  |         |              |                |                |                  |         |             |
|            | LT265/70R18 | E       |              |                |                |                  |         |             |
|            | 275/60R18   |         |              |                |                |                  |         |             |
|            | P275/65R18  |         |              |                |                |                  |         |             |
|            | LT275/65R18 | E       |              |                |                |                  |         |             |
| 19         | LT275/70R18 | E       |              |                |                |                  |         |             |
|            | 285/60R18   |         |              |                |                |                  |         |             |
|            | P225/55R19  |         |              |                |                |                  |         |             |
|            | 235/50R19   |         |              |                |                |                  |         |             |
|            | 235/55R19   |         |              |                |                |                  |         |             |
|            | 245/40R19   |         |              |                |                |                  |         |             |
|            | 245/45R19   |         |              |                |                |                  |         |             |
|            | 245/55R19   |         |              |                |                |                  |         |             |
|            | P245/55R19  |         |              |                |                |                  |         |             |
|            | 255/40R19   |         |              |                |                |                  |         |             |
|            | 255/45R19   |         |              |                |                |                  |         |             |
|            | 255/50R19   |         |              |                |                |                  |         |             |
|            | 255/55R19   |         |              |                |                |                  |         |             |
|            | P255/60R19  |         |              |                |                |                  |         |             |
|            | 265/50R19   |         |              |                |                |                  |         |             |
|            | 275/40R19   |         |              |                |                |                  |         |             |
|            | 275/55R19   |         |              |                |                |                  |         |             |
| 20         | 285/40R19   |         |              |                |                |                  |         |             |
|            | 285/45R19   |         |              |                |                |                  |         |             |
|            | 235/45R20   |         |              |                |                |                  |         |             |
|            | 235/55R20   |         |              |                |                |                  |         |             |
|            | P235/55R20  |         |              |                |                |                  |         |             |
|            | 245/40R20   |         |              |                |                |                  |         |             |
|            | 245/45R20   |         |              |                |                |                  |         |             |
|            | P245/50R20  |         |              |                |                |                  |         |             |
|            | 255/35R20   |         |              |                |                |                  |         |             |
|            | 255/45R20   |         |              |                |                |                  |         |             |
|            | 255/50R20   |         |              |                |                |                  |         |             |
|            | 255/55R20   |         |              |                |                |                  |         |             |
|            | 265/40R20   |         |              |                |                |                  |         |             |
|            | 265/50R20   |         |              |                |                |                  |         |             |
|            | P265/50R20  |         |              |                |                |                  |         |             |
|            | LT265/60R20 | E       |              |                |                |                  |         |             |
|            | 275/35R20   |         |              |                |                |                  |         |             |
| 21         | 275/40R20   |         |              |                |                |                  |         |             |
|            | 275/45R20   |         |              |                |                |                  |         |             |
|            | 275/50R20   |         |              |                |                |                  |         |             |
|            | 275/55R20   |         |              |                |                |                  |         |             |
|            | 275/60R20   |         |              |                |                |                  |         |             |
|            | P275/60R20  |         |              |                |                |                  |         |             |
|            | LT275/65R20 | E       |              |                |                |                  |         |             |
|            | 285/50R20   |         |              |                |                |                  |         |             |
|            | 315/35R20   |         |              |                |                |                  |         |             |
|            | 265/45R21   |         |              |                |                |                  |         |             |
| 22         | 285/35R21   |         |              |                |                |                  |         |             |
|            | 295/35R21   |         |              |                |                |                  |         |             |
|            | 295/40R21   |         |              |                |                |                  |         |             |
|            | 325/30R21   |         |              |                |                |                  |         |             |
|            | 275/40R22   |         |              |                |                |                  |         |             |