



Equipped with AEM® *Dryflow™ Filter*
No Oil Required!

INSTALLATION INSTRUCTIONS

PART NUMBER: 22-480

2002-2003	Mazda Protégé 5	Automatic Trans. Only	L4-2.0L	C.A.R.B. E.O. # D-670
2001-2003	Mazda Protégé	Automatic Trans. Only	L4-2.0L	C.A.R.B. E.O. # D-670
1999-2000	Mazda Protégé		L4-1.8L	C.A.R.B. E.O. # D-670

PARTS LIST

Description	Qty.	Part Number
Element Parts Kit 2.75 X 5" Dry Ele.	1	21-202DK
Lower Pipe	1	2-4802
Upper Pipe,	1	2-4803
Hose, Silicone 2.50x2" Black	1	5-252
Hose, Adapter 2.50/2.75 X 3" Bl.	1	5-257
Hose, Silicone 2.75x2" Black	1	5-272
1/2" Bnd. Hose Clamp, 2.15-3.00"	3	9440
1/2" Bnd. Hose Clamp, 2.31-3.25"	3	9444
1/2" Bnd. Hose Clamp, 2.56"-3.50"	1	9448

Read and understand these instructions BEFORE attempting to install this product. Failure to follow installation instructions and not using the provided hardware may damage the intake tube, throttle body and engine.

1. Preparing Vehicle

- a. Make sure vehicle is parked on level surface.
- b. Set parking brake.
- c. If engine has run in the past two hours, let it cool down.
- d. Disconnect negative battery terminal.
- e. Do not discard stock components after removal of the factory system.

2. Removal of stock system

- a. Make note of where the following components are located: ventilation hose, intake air temperature sensor, purge solenoid valve, and a mass air flow sensor (MAF). Refer to the **(Fig. 1)** diagram for the identification of these components.
- b. Disconnect the ventilation hose from the air hose.
- c. Remove the purge solenoid valve from the air hose.
- d. Loosen the two clamps that secure the air hose to the throttle body and the MAF sensor. Then remove the air hose.
- e. Disconnect the MAF sensor and intake air temp. sensor wires.
- f. Loosen the 2 air cleaner clips. Then remove the air cleaner cap, MAF sensor, and intake air temp sensor.
- g. Separate the MAF sensor from the air cleaner cap, by loosening the two 10 mm bolts.
NOTE: Make note of which end of the MAF sensor is the inlet side. (Fig. 2)
- h. Separate the air temp. sensor and it's rubber grommet from the air cleaner cap.
- i. Loosen the two 10 mm bolts securing the lower air cleaner assembly, then remove it.
- j. Remove the fresh air duct by loosening the two 10 mm nuts on either side of the radiator.
- k. Remove the resonance chamber by loosening the two 10mm bolts.

3. Installation of AEM[®] intake system.

- a. When installing the intake system, do not completely tighten the hose clamps or mounting hardware until instructed to do so.
- b. Ensure AEM inlet pipe and air filter are clean and free from any obstructions.
- c. Install the 2.50" coupler onto the throttle body using a No. 40 hose clamp.
- d. Install one No. 40 hose clamp onto the other end of the coupler.
- e. Slide the 2.50" curved inlet pipe into the coupler with the nipple facing upwards. **(Fig. 4)**
- f. Bolt the purge solenoid valve to the bracket on the curved inlet pipe with a bolt and flat washer. **(Fig. 4)**
- g. Install the 2.50"/2.75" adapter coupler onto the exposed end of the curved inlet pipe, secure with a No. 40 clamp.
- h. Slide the outlet end of the MAF sensor into the reducer coupler, and secure it with a No. 44 hose clamp.
- i. Install the rubber grommet into the 3/4" hole in the straight inlet pipe.
- j. Remove the 12mm bolt that secures the wiring bracket to the engine. **(Fig. 3)**
- k. Install the straight inlet pipe onto the MAF sensor as shown using a 2.75" coupler and 2 No. 44 clamps, so that the bracket lines up with the bolt hole in the engine. Then install the bolt removed in step 3j.
- m. Install the AEM air filter on to the end of the straight inlet pipe using a No. 44 clamp.
- n. Install the air temp sensor in the rubber grommet installed in step 3i.
- o. Install the valve cover breather hose onto the nipple on the curved inlet pipe.

4. Reassemble Vehicle

- a. **MAF and Air Temp Sensor:** Re-connect the wiring harness to the MAF Sensor and Air Temp Sensor.
- b. Position the inlet pipes for the best fitment. Be sure that the pipes or any other components do not contact any part of the vehicle. Tighten the rubber mount, all bolts, and hose clamps.
- c. Check for proper hood clearance. Re-adjust pipes if necessary and re-tighten them.
- d. Inspect the engine bay for any loose tools and check that all fasteners that were moved or removed are properly tightened.
- e. Reconnect negative battery terminals and start engine. Let the vehicle idle for 3 minutes. Perform a final inspection before driving the vehicle.

5. CARB Sticker Placement

- a. The C.A.R.B. exemption sticker, (attached), must be visible under the hood so that an emissions inspector can see it when the vehicle is required to be tested for emissions. California requires testing every two years, other states may vary.

6. Service and Maintenance

- a. It is recommended that you service your AEM[®] Dryflow[™] filter every 20,000 miles for optimum performance. Use AEM Dryflow cleaning kit part # 21-110.
- b. Use aluminum polish to clean your polished AEM[®] intake tube.
- c. Use window cleaner to clean your powder coated AEM[®] intake tube. **(NOTE: DO NOT USE aluminum polish on powder coated AEM intake tubes).**

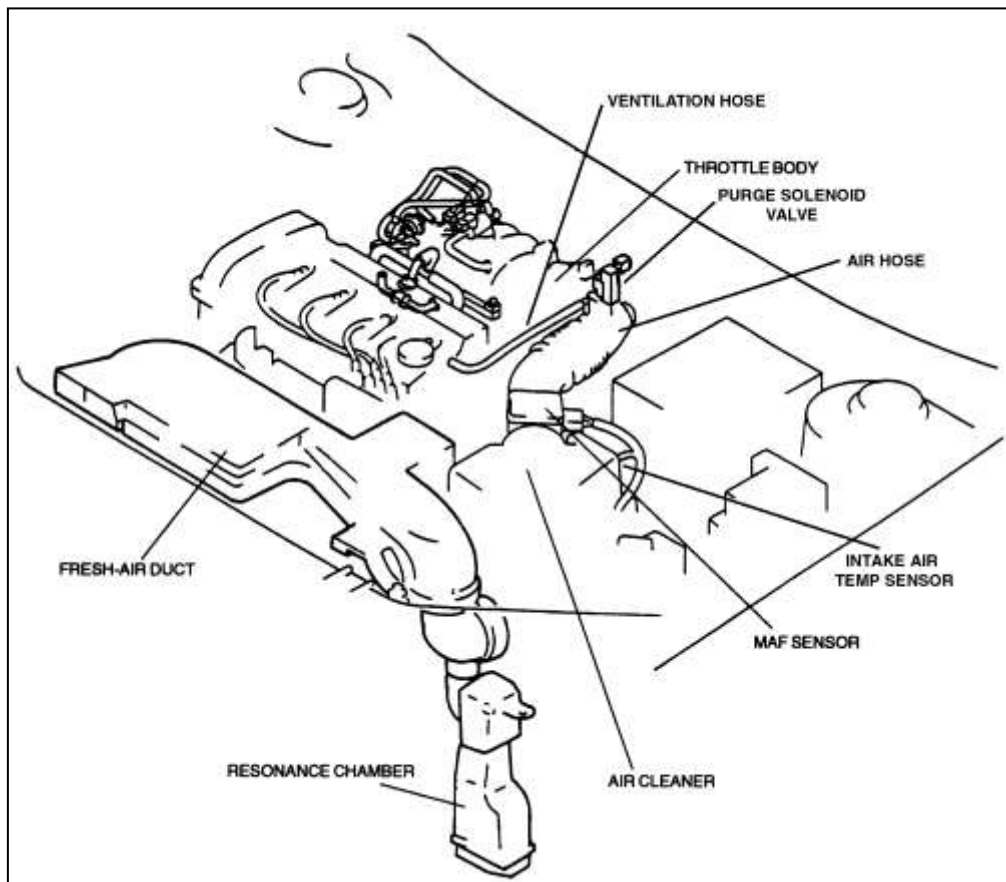


Fig. 1



Fig. 2

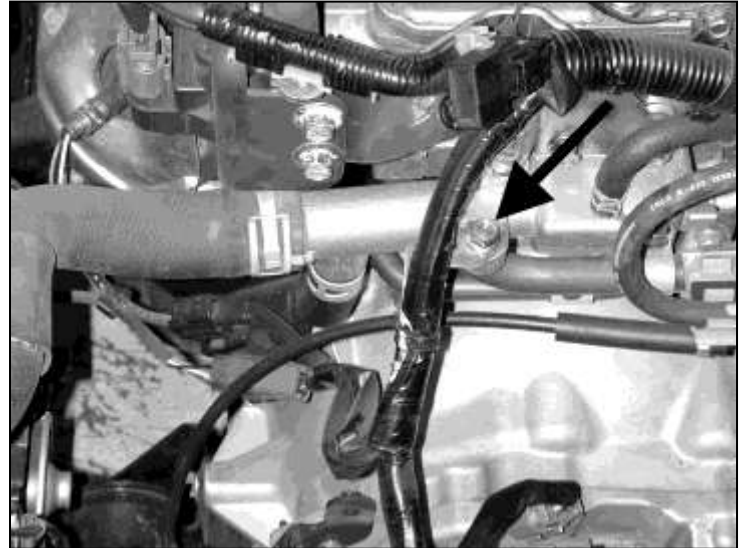


Fig. 3

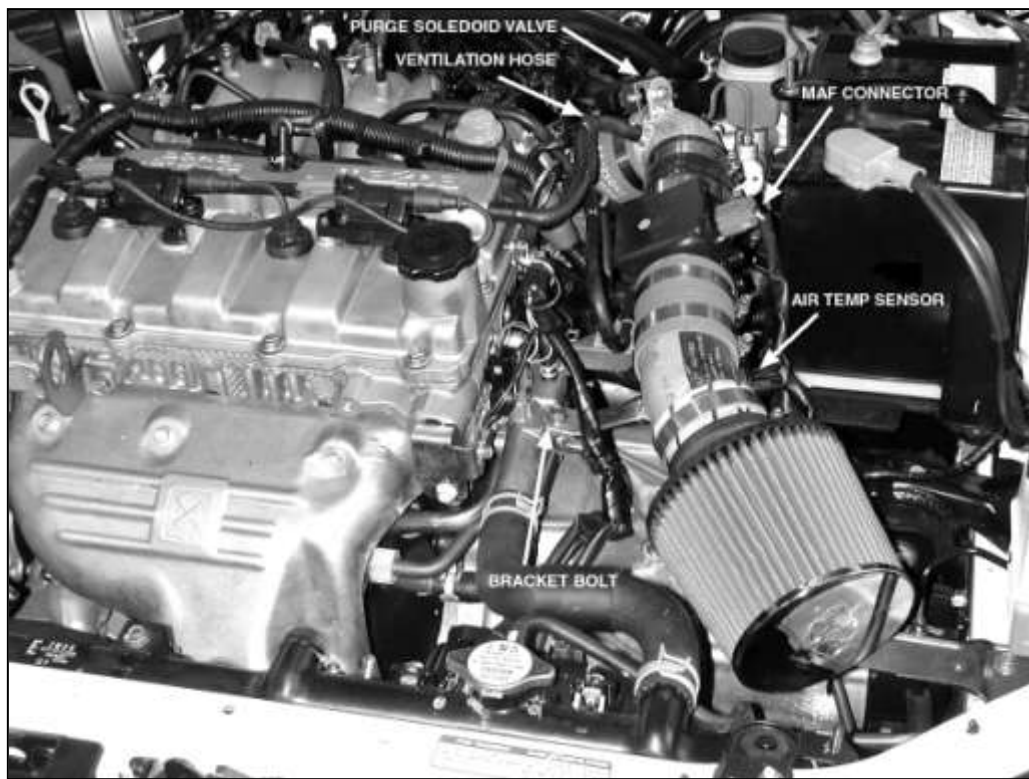


Fig. 4

Learn more about performance air intake systems we have.