

## Axxess LCD screen 2000-up

### INTERFACE FEATURES

- Retains the personalization menu that is lost when removing the factory radio (select applications)
- Retains and controls the factory satellite radio while using an Axxess interface (select applications)
- Adjustable 256 color LCD screen
- Wire channel for flexible mounting
- Micro “B” USB updatable

### INTERFACE COMPONENTS

- LCD Screen
- DIN harness with leads

### APPLICATIONS

*(For retaining the personalization menu that is lost when removing the factory radio)*

TOYOTA		FIAT		MAZDA	
Camry	2012-2014	Fiat 500 L	2014-2016	Mazda6	2014-2015

### APPLICATIONS

*(For retaining and controlling the factory satellite radio while using an Axxess Interface)*

BUICK		BUICK		BUICK		CADILLAC	
Century	2004-2005	Rainier	2004-2007	Terraza	2005-2008	Escalade/ESV/EXT	2003-2006
LaCrosse	2005-2009	Rendezvous	2002-2007				

*Applications continued on the next page*

### TABLE OF CONTENTS

Connections to be made .....	3
Using the LCD screen .....	4-5

### TOOLS REQUIRED

- Cutting tool • Crimping tool • Tape
- Connectors (example: butt-connectors, bell caps, etc.)

**CAUTION!** All accessories, switches, climate controls panels, and especially air bag indicator lights must be connected before cycling the ignition. Also, do not remove the factory radio with the key in the on position, or while the vehicle is running.

## APPLICATIONS (CONT)

(For retaining and controlling the factory satellite radio while using an Axxess Interface)

### CHEVROLET

Avalanche	2003-2006
Cavalier	2000-2005
Cobalt	2007-2010
Corvette	2005-2013
Express	2003-2007
HHR	2006-2011
Impala	2000-2005
Kodiak	2003-2009
Malibu	2001-2003
Malibu	2008-2012
Malibu (classic)	2004-2005
Monte Carlo	2000-2005
Silverado	2003-2006
Silverado (classic)	2007
SSR	2003-2006
Suburban	2003-2006
Tahoe	2003-2006
Trailblazer	2002-2009
Uplander	2005-2008

### FORD

Edge	2007-2014
Escape	2008-2012
Expedition	2007-2014
Explorer	2008-2015
Explorer Sport Trac	2008-2010
F-150	2009-2012
F-150 (with monochrome screen)	2013-2014
F-250/350/450/550	2011-2012
F-250/350/450/550 (with monochrome screen)	2013-2016
Fiesta (without MyFord Touch)	2011-up
Five Hundred	2005-2007
Focus	2008-2011
Focus (without MyFord Touch)	2012-2014
Fusion	2008-2012
Taurus	2008-2012
Taurus X	2008-2009
<b>GMC</b>	
Envoy	2002-2009
Savana	2003-2007
Sierra	2003-2006
Sierra (classic)	2007
Yukon / Yukon XL	2003-2006

### HARLEY DAVIDSON

Electraglide	2014-up
Limited	2014-up
Road Glide	2015-up
Streetglide	2014-up

### HUMMER

H2	2003-2007
H3/H3t	2006-2010

### ISUZU

Ascender	2003-2008
H-Series	2005-2009
I-Series	2006-2008

### LINCOLN

MKX	2008-2010
MKZ	2008-2009
Navigator	2007-2014

### MERCURY

Mariner	2008-2011
Milan	2008-2011
Mountaineer	2008-2010
Sable	2008-2009

### OLDSMOBILE

Alero	2001-2004
Bravada	2002-2004
Intrigue	2002
Silhouette	2000-2004

### PONTIAC

Aztec	2001-2005
G5	2007-2009
G6	2009-2010
Grand Am	2001-2005
Grand Prix	2004-2008
Montana SV6	2005-2006
Solstice	2006-2009
Sunfire	2000-2005

### SAAB

9-7x	2005-2009
------	-----------

### SATURN

Aura	2006-2009
Relay	2005-2009
Sky	2007-2009

## CONNECTIONS TO BE MADE

(For retaining the personalization menu that is lost when removing the factory radio)


The AX-LCD allows the retention of the vehicles personalization menu that is lost after removing the factory radio.

The DIN harness with leads is only for the following vehicles:

- Connect the **Black** wire to ground.
- Connect the **Red** wire to accessory power.

### For the Toyota Camry 2012-2014

The following connections are to be made to the factory 28-pin connector behind the radio:

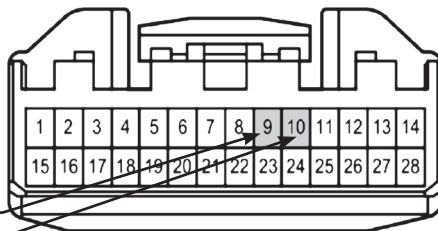


(this is the pin view of the factory harness)

- **Pink** of the AX-LCD to pin-9
- **Blue/Pink** of the AX-LCD to pin-10

### For the Mazda 6 2014-2015

The following connections are to be made to the factory 24-pin connector behind the radio:



(this is the wire view of the factory harness)

- **Pink** of the AX-LCD to pin-1L
- **Blue/Pink** of the AX-LCD to pin-1J


## CONNECTIONS TO BE MADE

(For retaining and controlling the factory satellite radio while using an Axxess Interface)

- Connect the DIN cable from the LCD screen into the DIN connector on the Axxess interface.

### For the Fiat 500L 2014-up, Ram 1500/2500/3500 (without 8.4" touchscreen radio), Chassis Cab 3500/4500/5500 (without 8.4" touchscreen radio) 2013-up,

The following connections are to be made to the factory 52-pin connector behind the radio:

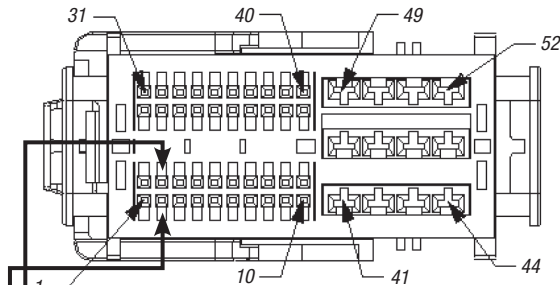

(this is the pin view of the factory harness)

- **Blue/Pink** of the AX-LCD to pin-12
- **Pink** of the AX-LCD to pin-2

## USING THE LCD SCREEN

*(For retaining the personalization menu that is lost when removing the factory radio)*

- Press and hold the **“Return/ESC”** button on the LCD screen for 5 seconds until **“Select Interface”** comes up.
- Select **“Connection Type”**, and then press **“Enter”**.
- Scroll up or down to **“Direct Connect”**, and then press **“Enter”**.
- Once done, press the **“Return/ESC”** button two times to get back to the main menu.

### Main menu options:

- **Red** adjusts the red backlighting of the LCD (ranges from 1 to 32).
- **Blue** adjusts the blue backlighting of the LCD (ranges from 1 to 32).
- **Green** adjusts the green backlighting of the LCD (ranges from 1 to 32).
- **Contrast** adjusts the contrast of the LCD (ranges from 1 to 100).
- **Reset** puts the color back to the default settings.

**Note:** *The vehicle menu will vary from car to car. For more information, please see the owner's manual that came with the vehicle.*

- ▲ **Arrow Up** - Toggles “up” through menu options
- ▼ **Arrow Down** - Toggles “down” through menu options
- ↻ **Return/ESC** - Return to the previous menu
- ✓ **Enter** - Enter current menu option

## USING THE LCD SCREEN

*(For retaining and controlling the factory satellite radio while using an Axxess Interface)*

- Press and hold the **“Return/ESC”** button on the LCD screen for 5 seconds until **“Select Interface”** comes up.
- Select **“Connection Type”**, and then press **“Enter”**.
- Select **“Gateway”**, and then press **“Enter”**.
- Once done, press the **“Return/ESC”** button two times to get back to the main menu.

### Main menu options:

- **Red** adjusts the red backlighting of the LCD (ranges from 1 to 32).
- **Blue** adjusts the blue backlighting of the LCD (ranges from 1 to 32).
- **Green** adjusts the green backlighting of the LCD (ranges from 1 to 32).
- **Contrast** adjusts the contrast of the LCD (ranges from 1 to 100).
- **Reset** puts the color back to the default settings.

**Note:** *The vehicle menu will vary from car to car. For more information, please see the owner's manual that came with the vehicle.*

- ▲ **Arrow Up** - Channel Up
- ▼ **Arrow Down** - Channel Down
- ⊞ **Return/ESC** - Selects current item on the screen
- ✓ **Enter** - Exits to the previous screen