



INSTALLATION INSTRUCTIONS

Installation instructions for Toyota FJ rear bumper; PN FJ-2961

**** Inspect bumper and all parts prior to installation.**

**** If there is any freight damage, contact the company where you purchased the product. They will be able to process a freight claim or direct you to us if your order was shipped directly from Body Armor.**

Hardware list:

	FJ-2961
QTY 8	M12X1.75X40mm
QTY 8	M12X1.75 nut
QTY 26	M12 Washer
QTY 10	M12X1.25X65mm

Removing Factory bumper:

- 1 Remove rear bumper fascia from vehicle.
- 2 Unplug and remove back-up sensors if equipped and save for installation.



- 3 Remove Styrofoam center piece.

Bumper Installation for FJ-2961:

We recommend you have help with lifting of the rear bumper to avoid injury or damage to bumper and vehicle.


- 1 Cut plastic corner pieces from rear fascia as shown in pictures.



- 2 Reinstall cut corner pieces with factory hardware.
- 3 Re- install the back-up sensors. Prior to placing the bumper on the vehicle.
- 4 Bolt corner pieces to center section with supplied hardware. Place the bumper on the vehicle; be sure to have all of the tabs on the back of the FJ under the bumper. If any are on top they will damage the paint



- 5 Using M12x1.75x40mm bolts, washers and nuts loosely attach D-ring plate to bumper and bumper to vehicle.

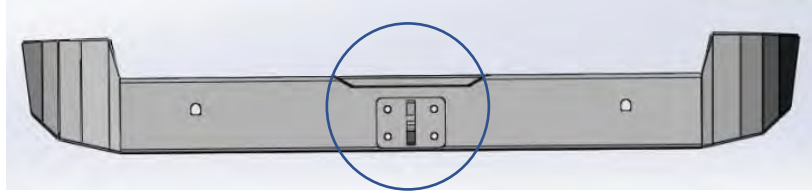

- 6 Install four bolts through bottom of bumper into frame Spacers may be required if you are not installing or do not have an aftermarket hitch. If your vehicle is equipped with an aftermarket hitch you will not need to use spacers.



- 7 Check alignment to body and tighten all hardware. Start with the bolts under the frame, tighten the center bolts last.

Note: Recheck all hardware after the first couple hundred miles. It is advised to inspect the bumper and hardware periodically.