



IMPORTANT

CENTERFORCE FLYWHEELS

ALL FLYWHEELS

All CENTERFORCE flywheels have a preservative on them to help prevent rust. We recommend that you use BRAKE CLEAN to remove all traces of the preservative prior to installing the clutch assembly.

Failure to do so may cause slippage and premature clutch failure

NOTE: Replacement of any Dual-Mass flywheel with a Single-Mass Flywheel may result in unwanted gear noise from the transmission.



CENTERFORCE
DUAL

FRICTION

DPX

DYAD
QUALITY ENGINEERED MULTI DISK CLUTCH SYSTEMS



LMC
SERIES

CENTERFORCE FLYWHEELS

"NOTE" Centerforce tip sheets are for general reference only.
Please refer to your owners manual for vehicle specifications.


IMPORTANT

The enclosed flywheel to pressure plate dowel pins are to be used as follows:

For Centerforce 11" clutch assemblies, use the TWO enclosed straight sided pins in their corresponding flywheel locations.

For Centerforce 12" clutch assemblies, use the THREE enclosed stepped dowel pins in their corresponding flywheel locations.

(Note: the large end of the pin is a press fit into the flywheel)

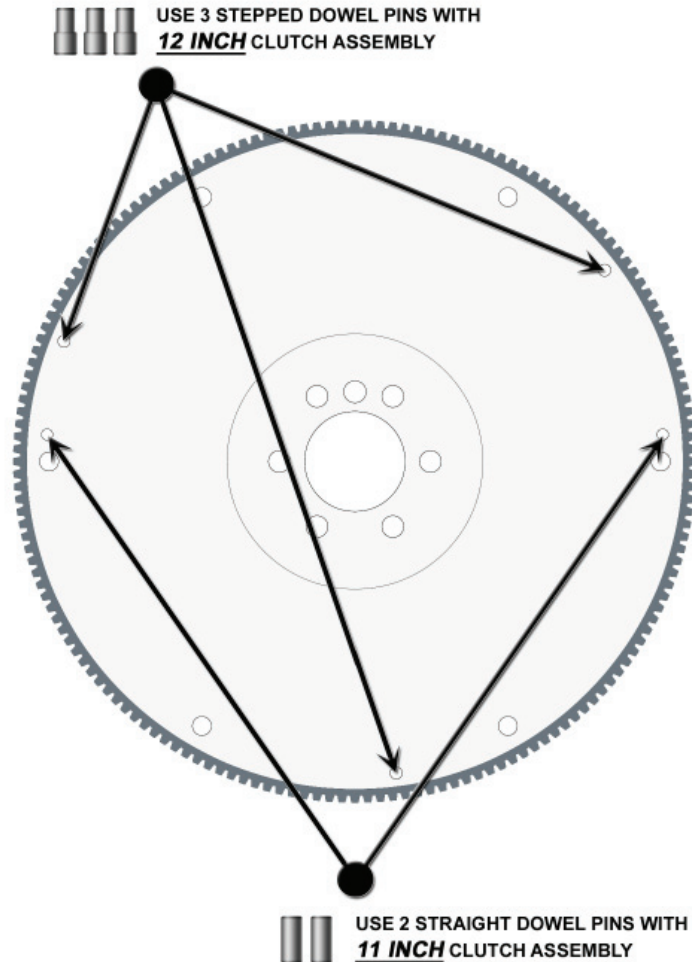

"NOTE" Centerforce tip sheets are for general reference only. Please refer to your owners manual for vehicle specifications.

IMPORTANT