



51444 JEEP GRAND CHEROKEE

ELECTRIC BRAKE CONTROL ADAPTER HARNESS

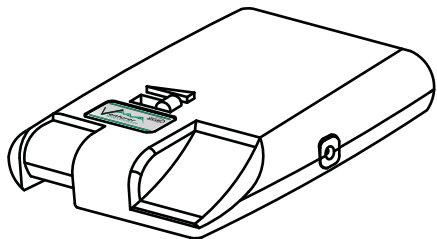

MUST READ FIRST!

All steps must be followed to ensure correct function of the T-Connector. To verify proper installation once installed, test by connecting a test light or properly wired trailer.

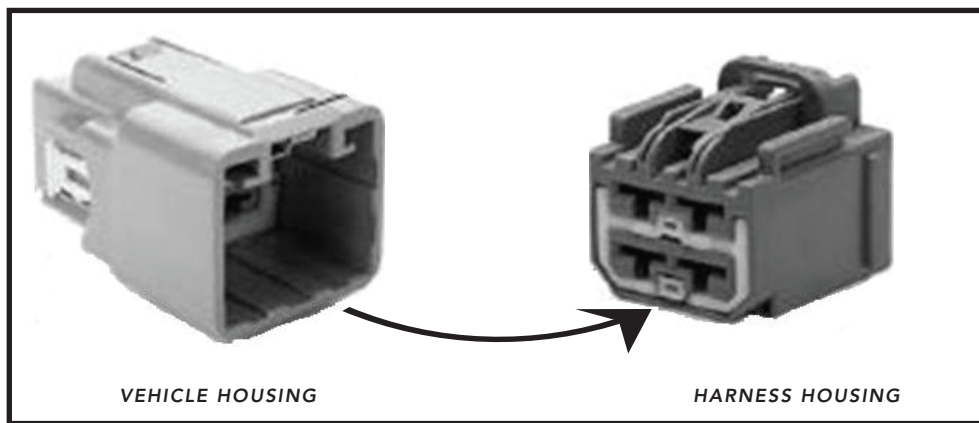

VEHICLE HOUSING

HARNESS HOUSING

WIRE COLOR DESIGNATORS DESIGNADORES DEL COLOR DEL ALAMBRE INDICATEURS DE COULEUR DE FIL

BLACK	>	BATTERY POWER (+)
NEGRO	>	ENERGÍA DE BATERÍA (+)
NOIR	>	PUISSANCE DE BATTERIE (+)
WHITE	>	GROUND (-)
BLANCO	>	TIERRA (-)
BLANC	>	LA TERRE (-)
RED	>	BRAKE SIGNAL FROM VEHICLE
ROJO	>	SEÑAL DEL FRENO DEL VEHÍCULO
ROUGE	>	SIGNAL DE FREIN DE VÉHICULE
BLUE	>	ELECTRIC BRAKE FEED TO TRAILER
AZUL	>	ALIMENTACIÓN ELÉCTRICA DEL FRENO AL ACOPLADO
BLEU	>	ALIMENTATION ÉLECTRIQUE DE FREIN AU BAS DE PAGE



The **FIRST** Name
in Towing Products™

English

1. Remove felt liner under the dash by removing two plastic fasteners holding it in place (A). Under the felt liner locate the vehicle's electric brake control harness connector. The connector will be located underneath the dash and left of the steering column, attached to the top of a junction box (B).

2. Plug the brake control adapter into the vehicle's electric brake controller connector. Attach the wires from the adapter to the corresponding wires on the electric brake control, following the brake control manufacturer's installation instructions.

3. Complete the installation per the electric brake control manufacturer's instructions and mount the unit as directed. Perform test procedures as instructed.

