



INSPECT YOUR PRODUCT FOR DAMAGE & MISSING PARTS BEFORE PROCEEDING TO INSTALLATION

PROCEDURE FOR RETURNS OR MISSING HARDWARE

-PLEASE CONTACT THE ORIGINAL POINT OF PURCHASE FOR:
SHIPPING DAMAGE, RETURNS, OR WARRANTY CLAIMS

-CONTACT DEE ZEE DIRECTLY FOR MISSING PARTS OR HARDWARE

⚠ WARNING: Cancer and Reproductive Harm

Operating, servicing, and maintaining a passenger vehicle can expose you to chemicals such as lead, phthalates, engine exhaust, and carbon monoxide that are known to the State of California cause cancer and birth defects or other reproductive harm. To minimize exposure, service your vehicle and its accessories in a well-vented area and wear gloves or wash your hands frequently.



Thank you for choosing Dee Zee to add function and accessorize your vehicle. Dee Zee has been a staple brand in the truck accessory market since 1977 and we hold a reputation of quality manufacturing based in America's Heartland. Our products are born through careful engineering and backed by industry leading warranty programs. We appreciate the opportunity to serve you and your vehicle!

Review the instruction pages in their entirety to prepare the required tools

Warning: Please check for wiring or other obstructions before drilling any holes in the vehicle. If it is necessary to drill any holes, Dee Zee recommends putting a sealant or rust inhibitory around all holes drilled into the body of the vehicle.

It is the sole responsibility of the vehicle owner to check for tire clearance. It is unlawful and dangerous to ride on any external vehicle step while the vehicle is in motion.






Cleaning: To be entitled to all warranty rights offered with the product, Dee Zee steps need to be cleaned regularly with a mild detergent. Do NOT use abrasive cleaners. For stainless steel products, the application of a high grade automotive wax is recommended.



Dee Zee Cares - Please Recycle

50" Light Bar Bracket Installation Instructions


DZ 4462JL Jeep Wrangler JL 2019-Current

A Driver A-Pillar Bracket  B 2655LP X1	B Passenger A-Pillar Bracket  B 2655RP X1	C M8 X 12mm Button Head Bolt  PN 1260 X4
D M8 Square Nut  PN 1262 X4	Required tools  Allen Wrench 5mm	TO INSTALL THIS BRACKET KIT YOU MUST HAVE BRACKET KITS DZ 4445JL AND DZ 4446JL PREVIOUSLY INSTALLED ON THE JEEP.


DISTANCE FROM BRACKET TO BRACKET IS 50.5" FOR LIGHTBAR FITMENT

1


First remove endcap from the driver's side A-Pillar Light Bracket.

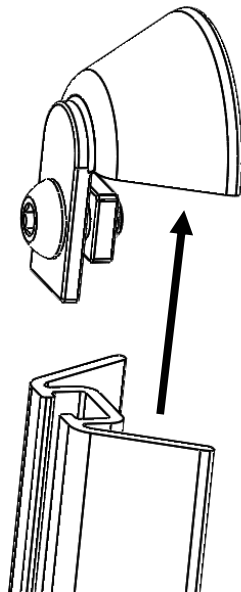

2 Install bolts (C) and nuts (D) into the left bracket (A).

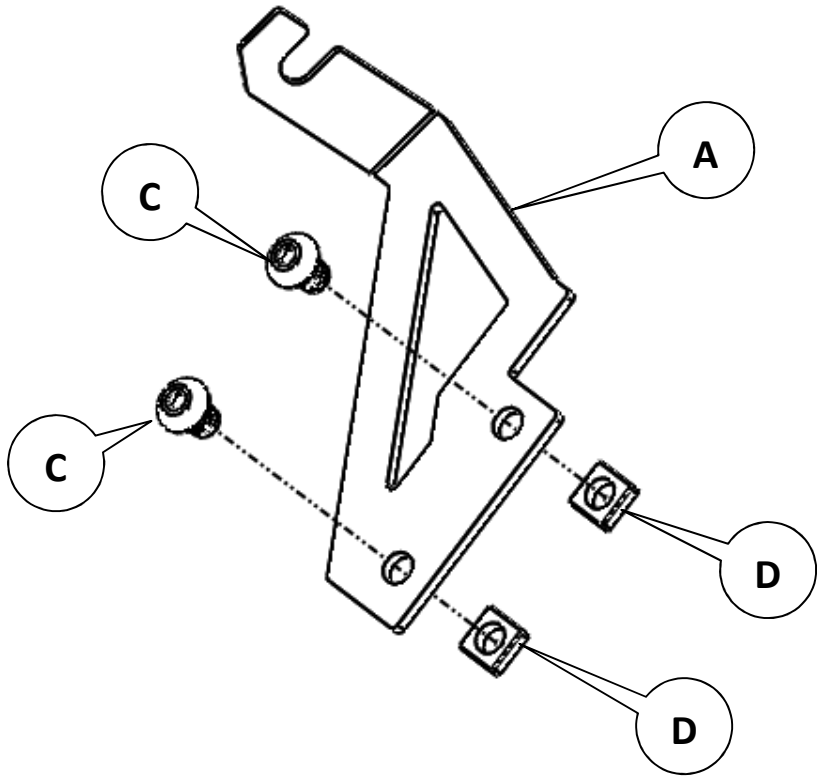


3 Slide bracket into A-Pillar channel and replace endcap. Fully tighten endcap at this time.

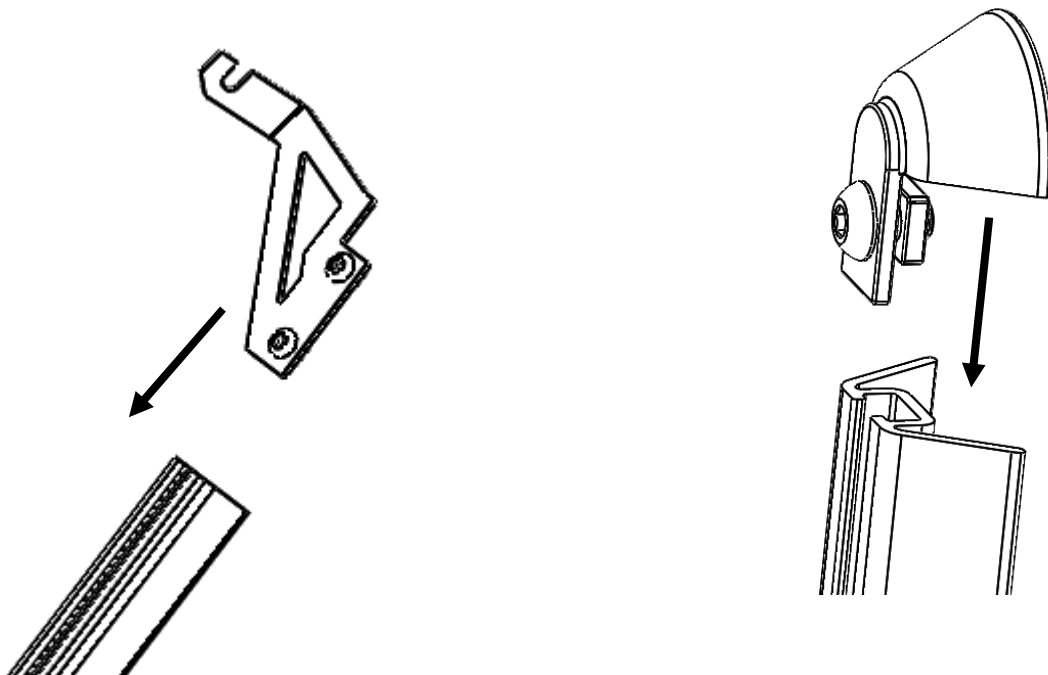

4

Slide bracket (A) up the channel until bracket is touching the endcap. Fully tighten bracket at this time.

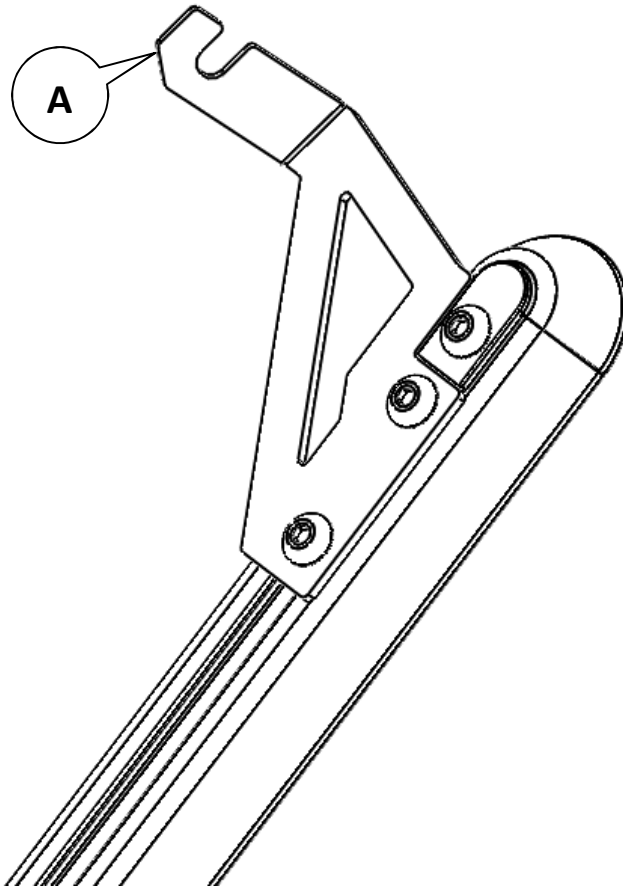

Repeat Steps 1-4 on Passenger side Using bracket B instead of A.