



## **Cabin Air Filter**

### **Removal & Installation Instructions**

To maintain air conditioning efficiency, replace the air filter according to the manufacturer's maintenance schedule.

Always use an air filter. Removing the filter may decrease system performance by allowing dust to lower the efficiency of A/C and heating system components.

Prior to the installation of this DENSO First Time Fit® Cabin Air Filter, you must read these instructions completely.

---

#### **Definition of Terms**

**⚠WARNING:** Describes precautions that should be observed in order to prevent injury or death to the user during installation.

**⚠CAUTION:** Describes precautions that should be observed in order to prevent damage to the vehicle or its components, which may occur during installation if sufficient care is not taken.

**NOTE:** Provides additional information that facilitates installation work.

---

#### **General Service Information and Requirements**

**⚠WARNING:** To prevent the Supplemental Restraint System (SRS, Air Bag System) from operating, remove the ground (negative) cable from the battery, then wait at least 90 seconds before starting this procedure. This allows the backup power system to discharge.

**NOTE:** For more detailed instructions please refer to the vehicle manufacturer's service manual.

#### **REQUIRED TOOLS:**

- Safety Goggles
- Assorted Hand Tools


#### **SAFETY PRECAUTIONS:**

- Always wear safety goggles

## **Cabin Air Filter Removal**

The information below explains necessary procedures and tools to remove and install the Cabin Air Filter (CAF).

1. Open the hood.
2. Release the clip on the left of the passenger side cowl cover and remove.
3. Temporarily remove the vacuum hose, from the left and center of the passenger side cowl cover.
4. Remove the passenger side cowl cover.  
(See Fig. 1)
5. Remove the rain shield.

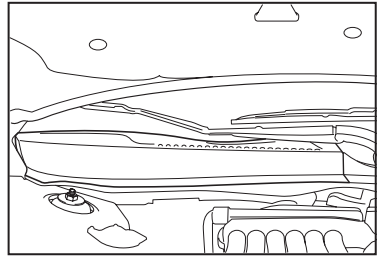


**Fig. 1**

**NOTE:** Only some vehicles have rain shields.

6. Remove the filter from the filter holder and discard.

## **Cabin Air Filter Installation**

7. Insert the new CAF into the filter holder.
8. Reinstall the rain shield (if applicable), the cowl cover, reattach the vacuum hose, reattach the passenger side cowl cover clip. (See Fig. 2)

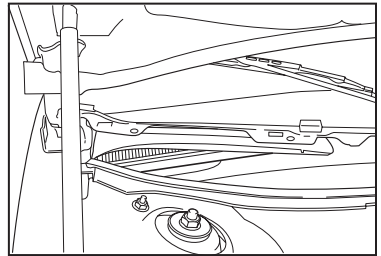

**Fig. 2**

## **Noise Test**

9. Reconnect the battery ground cable.
10. Engine ON, A/C ON, blower speed on high.
11. Listen for any abnormal air noises from the air filter area.